


FEATURES

- » Durable Welded Metal Construction
- » Electrostatic Powder Coating
- » Wall Mounting Holes on Rear Top
- » Coat Rail with Hook in Each Section
- » Reinforced Doors with Concealed Hinges and Anti-Noise Plastic Buffers
- » Stamped Label Holder on Doors
- » Louvered Doors for Air Circulation
- » 2.000 Differs Round Head Camlock with 2 Keys
- » Key Duplicate Support
- » Masterkey Support
- » Packaging: Nylon Bag + Corrugated Carton

OPTIONAL

- » Bolting Holes on Sides to Connect Cupboards [Fixing Kit is Not Included]
- » Perforated Door Types
- » Swing Door Models
- » Keypad Combination Lock
- » Wheel Combination Lock
- » 2.000 Differs 3 Point Round Head Camlock with 2 Keys
- » Latchlock
- » Flush Latchlock
- » 3 Point Latchlock
- » 200 mm Sloping Roof [Fixing by Bolt]
- » 100 mm Base [Fixing by Bolt]
- » 100 mm Feet [Welded or Fixing by Bolt on Request]
- » 100 mm Framed Feet [Fixing by Bolt]
- » 400 mm Bench Models [Fixing by Bolt]


STANDARD COLORS FOR THIS RANGE

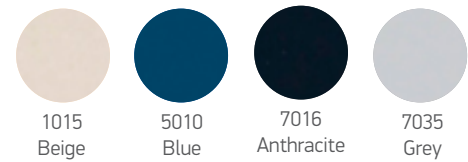

- » Non-standard colors are available with price difference (extra charge)
- » Production codes are referring items completely in color Grey 7035



Monoblock



Powder Coated



Key Lock



Aeration



Cleaning






Warranty






STANDARD			
view			
catalogue code	WRZ/2.1830	WRZ/4.1860	WRZ/6.1890
production code	152M0601-00080	152M0601-00081	152M0601-00082
no of door	2	4	6
door type	standard	standard	standard
ventilation	louvered	louvered	louvered
height (mm)	1800	1800	1800
width (mm)	315	600	885
depth (mm)	500	500	500




VERSION 1

view			
catalogue code	WRZ/2.1830.V1	WRZ/4.1860.V1	WRZ/6.1890.V1
production code	152M0601-00083	152M0601-00084	152M0601-00085
no of door	2	4	6
door type	standard	standard	standard
ventilation	square perforated	square perforated	square perforated
height (mm)	1800	1800	1800
width (mm)	315	600	885
depth (mm)	500	500	500




VERSION 2

view			
catalogue code	WRZ/2.1830.V2	WRZ/4.1860.V2	WRZ/6.1890.V2
production code	152M0601-00086	152M0601-00087	152M0601-00088
no of door	2	4	6
door type	swing	swing	swing
ventilation	louvered	louvered	louvered
height (mm)	1800	1800	1800
width (mm)	315	600	885
depth (mm)	500	500	500




VERSION 3

view			
catalogue code	WRZ/2.1830.V3	WRZ/4.1860.V3	WRZ/6.1890.V3
production code	152M0601-00089	152M0601-00090	152M0601-00091
no of door	2	4	6
door type	swing	swing	swing
ventilation	square perforated	square perforated	square perforated
height (mm)	1800	1800	1800
width (mm)	315	600	885
depth (mm)	500	500	500

VERSION 4

view			
catalogue code	WRZ/2.1830.V4	WRZ/4.1860.V4	WRZ/6.1890.V4
production code	152M0601-00092	152M0601-00093	152M0601-00094
no of door	2	4	6
door type	standard	standard	standard
ventilation	round perforated	round perforated	round perforated
height (mm)	1800	1800	1800
width (mm)	315	600	885
depth (mm)	500	500	500

VERSION 5

view			
catalogue code	WRZ/2.1830.V5	WRZ/4.1860.V5	WRZ/6.1890.V5
production code	152M0601-00095	152M0601-00096	152M0601-00097
no of door	2	4	6
door type	swing	swing	swing
ventilation	round perforated	round perforated	round perforated
height (mm)	1800	1800	1800
width (mm)	315	600	885
depth (mm)	500	500	500


FEATURES

- » Durable Welded Metal Construction
- » Electrostatic Powder Coating
- » Wall Mounting Holes on Rear Top
- » Coat Rail with Hook in Each Section
- » Reinforced Doors with Concealed Hinges and Anti-Noise Plastic Buffers
- » Stamped Label Holder on Doors
- » Louvered Doors for Air Circulation
- » 2.000 Differs Round Head Camlock with 2 Keys
- » Key Duplicate Support
- » Masterkey Support
- » Packaging: Nylon Bag + Corrugated Carton


OPTIONAL

- » Bolting Holes on Sides to Connect Cupboards [Fixing Kit is Not Included]
- » Perforated Door Types
- » Swing Door Models
- » Coin Lock
- » Keypad Combination Lock
- » Wheel Combination Lock
- » 2.000 Differs 3 Point Round Head Camlock with 2 Keys
- » Latchlock
- » Flush Latchlock
- » 3 Point Latchlock
- » 200 mm Sloping Roof [Fixing by Bolt]
- » 100 mm Base [Fixing by Bolt]
- » 100 mm Feet [Welded or Fixing by Bolt on Request]
- » 100 mm Framed Feet [Fixing by Bolt]
- » 400 mm Bench Models [Fixing by Bolt]

STANDARD COLORS FOR THIS RANGE

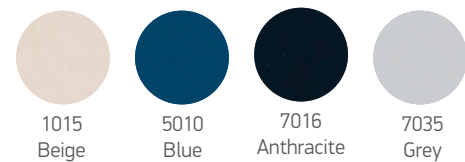

- » Non-standard colors are available with price difference (extra charge)
- » Production codes are referring items completely in color Grey 7035

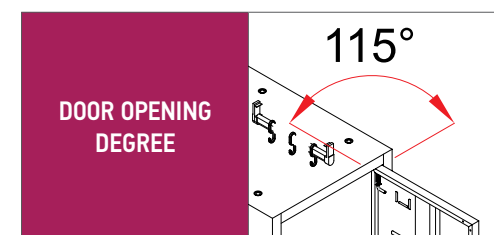

Monoblock



Powder Coated



Key Lock



Aeration







Cleaning



Warranty



	STANDARD		
view			
catalogue code	WRZ/2.1840	WRZ/4.1880	WRZ/6.1812
production code	152M0601-00098	152M0601-00099	152M0601-00100
no of door	2	4	6
door type	standard	standard	standard
ventilation	louvered	louvered	louvered
height (mm)	1800	1800	1800
width (mm)	415	800	1185
depth (mm)	500	500	500

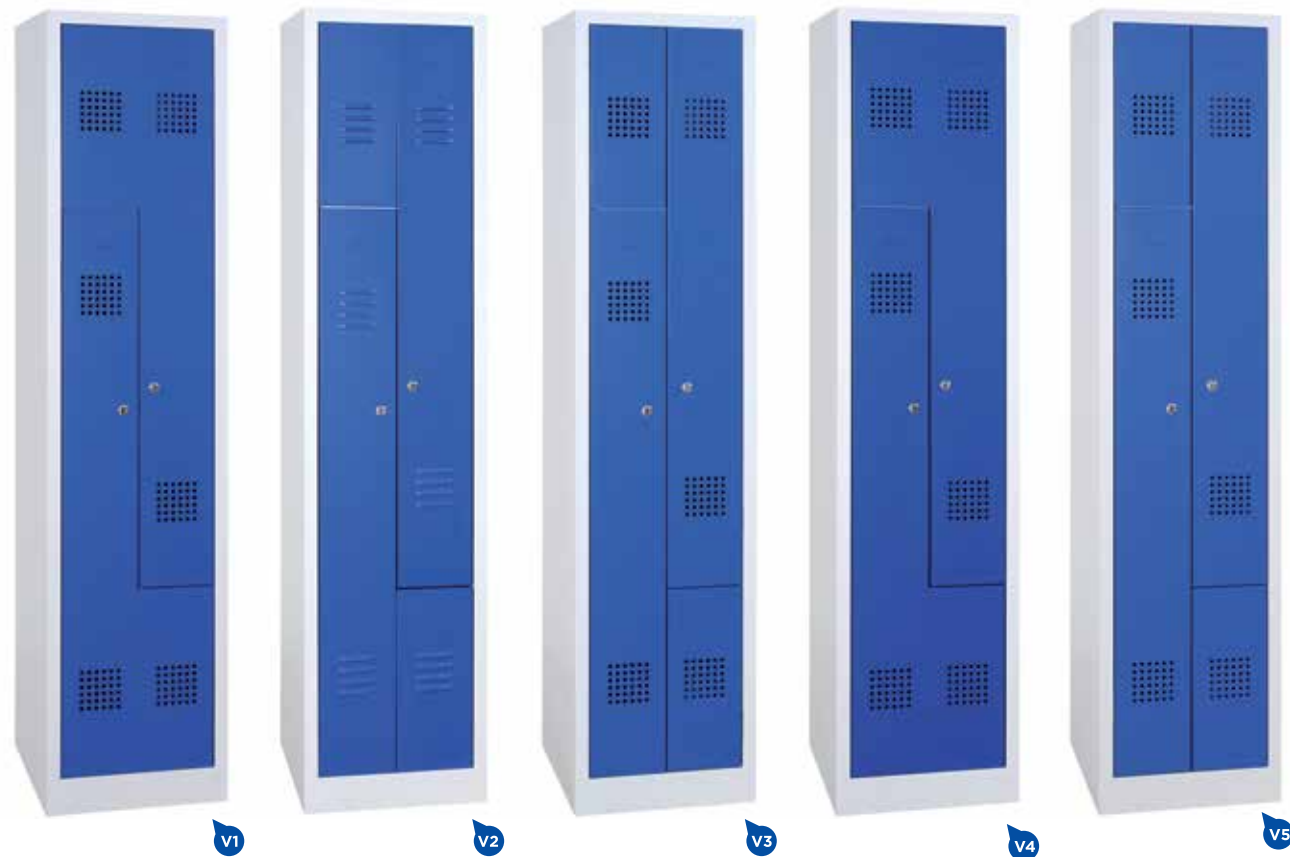

VERSION 1			
view			
catalogue code	WRZ/2.1840.V1	WRZ/4.1880.V1	WRZ/6.1812.V1
production code	152M0601-00101	152M0601-00102	152M0601-00103
no of door	2	4	6
door type	standard	standard	standard
ventilation	square perforated	square perforated	square perforated
height (mm)	1800	1800	1800
width (mm)	415	800	1185
depth (mm)	500	500	500

VERSION 2			
view			
catalogue code	WRZ/2.1840.V2	WRZ/4.1880.V2	WRZ/6.1812.V2
production code	152M0601-00104	152M0601-00105	152M0601-00106
no of door	2	4	6
door type	swing	swing	swing
ventilation	louvered	louvered	louvered
height (mm)	1800	1800	1800
width (mm)	415	800	1185
depth (mm)	500	500	500

VERSION 3			
view			
catalogue code	WRZ/2.1840.V3	WRZ/4.1880.V3	WRZ/6.1812.V3
production code	152M0601-00107	152M0601-00108	152M0601-00109
no of door	2	4	6
door type	swing	swing	swing
ventilation	square perforated	square perforated	square perforated
height (mm)	1800	1800	1800
width (mm)	415	800	1185
depth (mm)	500	500	500

VERSION 4			
view			
catalogue code	WRZ/2.1840.V4	WRZ/4.1880.V4	WRZ/6.1812.V4
production code	152M0601-00110	152M0601-00111	152M0601-00112
no of door	2	4	6
door type	standard	standard	standard
ventilation	round perforated	round perforated	round perforated
height (mm)	1800	1800	1800
width (mm)	415	800	1185
depth (mm)	500	500	500

VERSION 5			
view			
code	WRZ/2.1840.V5	WRZ/4.1880.V5	WRZ/6.1812.V5
production code	152M0601-00113	152M0601-00114	152M0601-00115
no of door	2	4	6
door type	swing	swing	swing
ventilation	round perforated	round perforated	round perforated
height (mm)	1800	1800	1800
width (mm)	415	800	1185
depth (mm)	500	500	500