



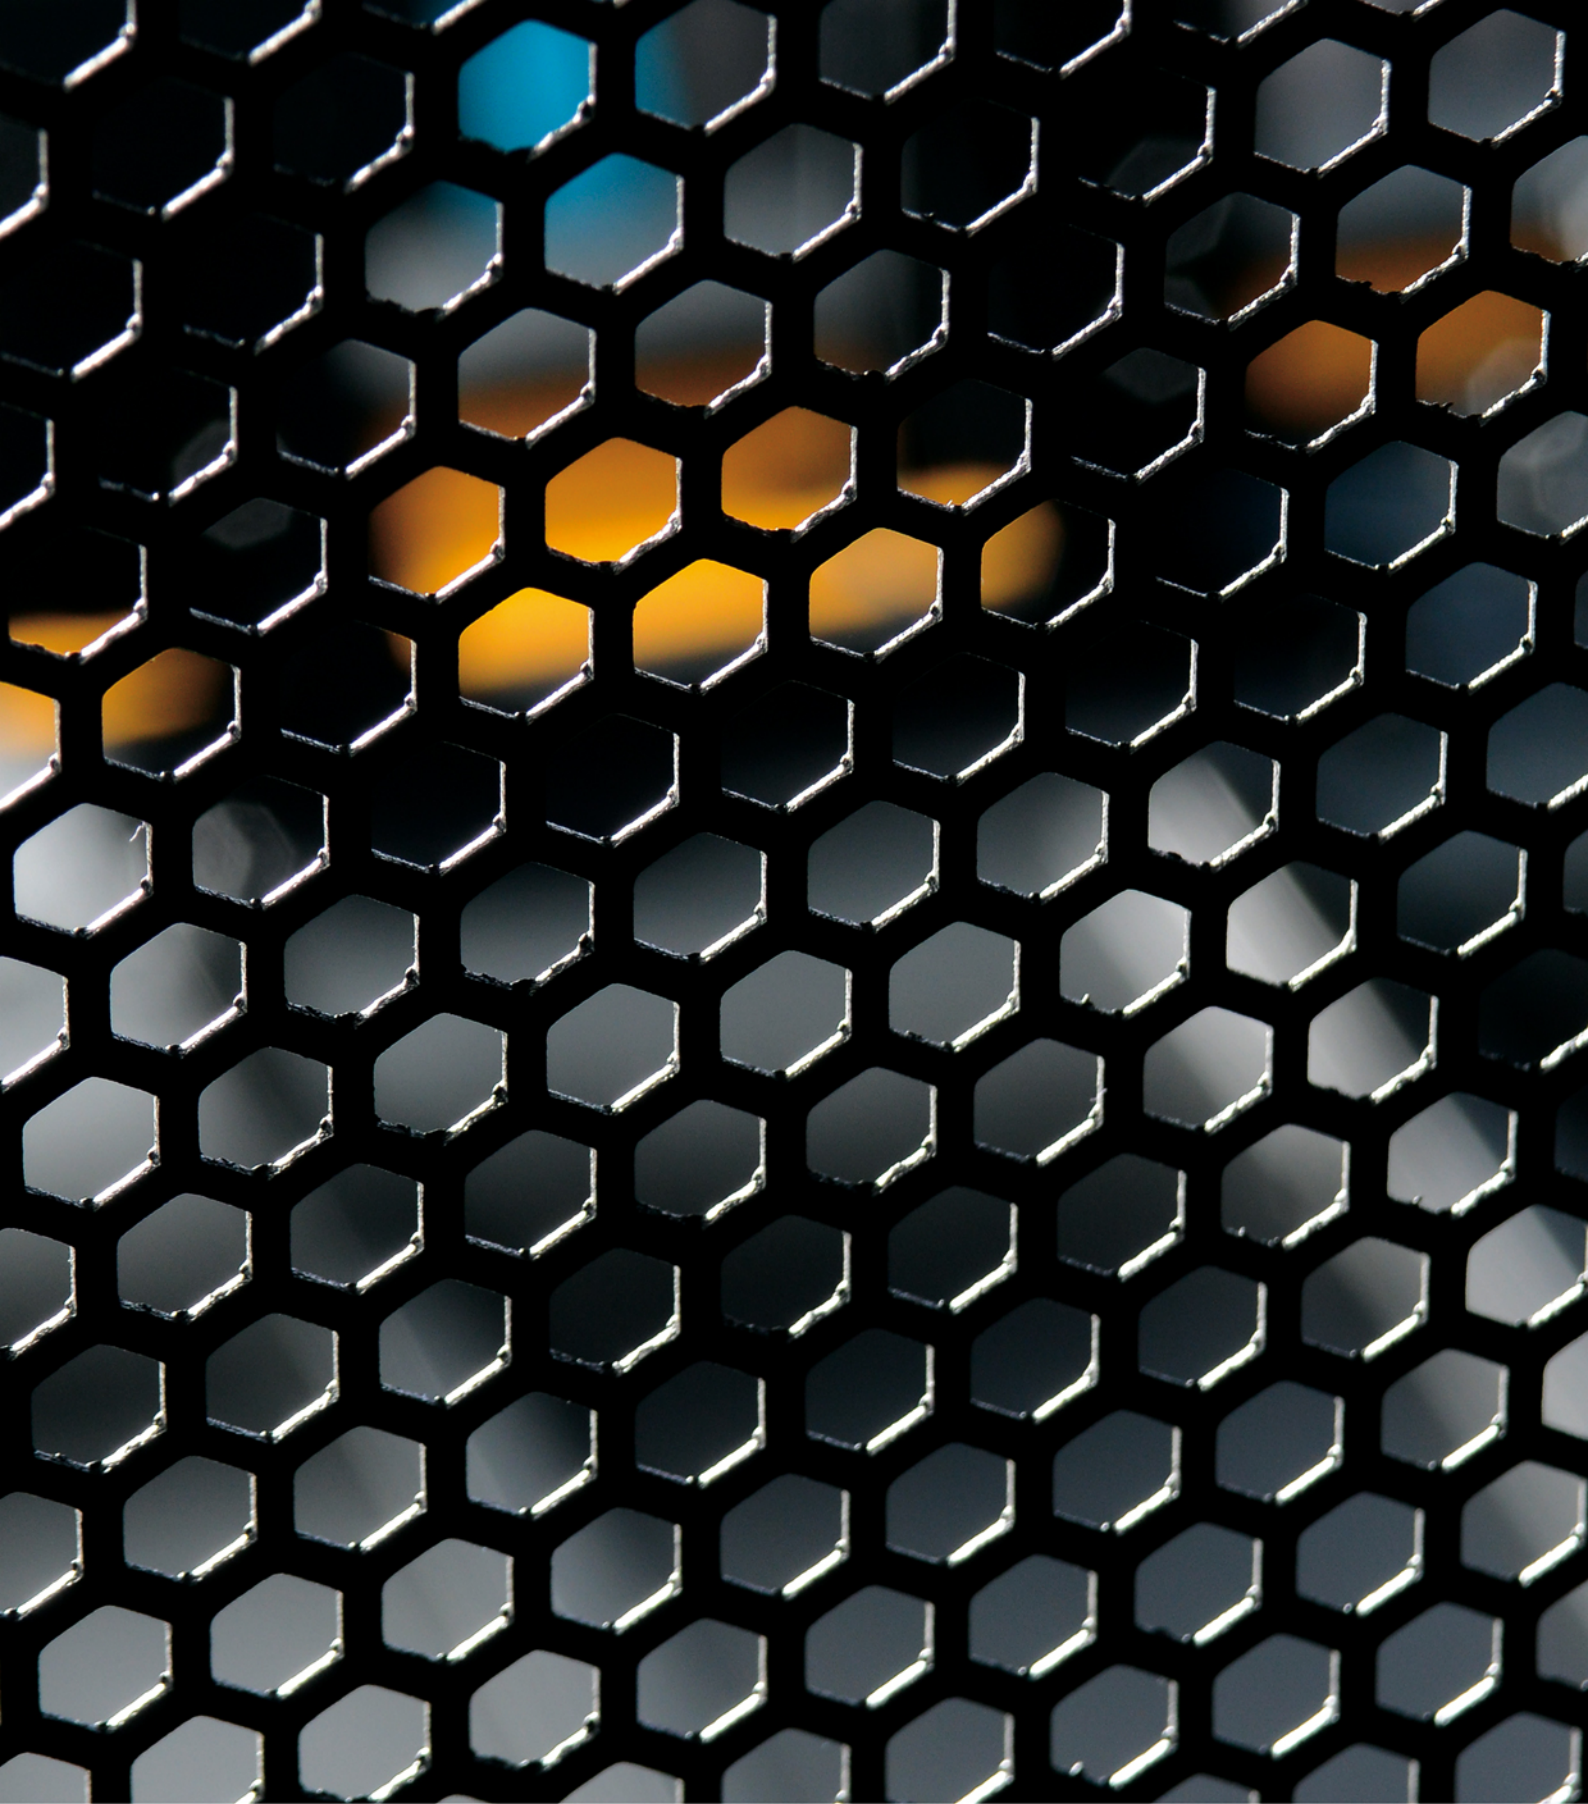

**GÜRKAN**  
**NETWORK CABINETS**

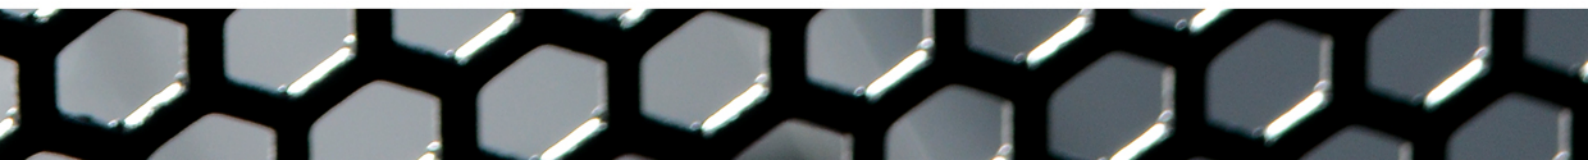

The logo for GURKAN, featuring the word "GURKAN" in white, bold, uppercase letters on a dark red rectangular background.

*Gürkan Office Furniture is continuing his activities in his sector since 1976. The first big production facility has been built in 1992 over 20.000 sqm area. The company kept growth by using the new technology and composing his team by skilled human resources and optimal use of the reserves. Together with the continuity of the demands, growth has been supported by the new production plant which has been put under power on an area of 160.000 sqm.*

*Gürkan Office Furniture preserves the leading position in the office furniture branch in Turkey since has been established. The customer satisfaction and continuity of this satisfaction is on priority. The company using the rapidly developing production technologies enhances the products and the services bringing plus values to his sector. All the organization uses the resources on a most efficient way. Environmental and public values are respected and reflected as the culture of the establishment. On a direction of customer demands and expectations, the company Gürkan Office Furniture intends to be a well known and trusted brand.*

*The products have the GS labels certified by TÜV, the services and overall quality is assured by means of ISO 9001, ISO 10002, ISO 14001, ISO 27001, OHSAS 18001 standards. To keep up these standards, our company has a dynamic and active team of 650 employees including 20 administrative and 30 technical staff.*

*The heart of this dynamism is the harmony set up the by company between the customers and the suppliers together with his employees. This energy powered by the customer satisfaction helps us to deliver functional and quality products on time. On our rapidly changing globalize world, we are using all our resources to be competitive and continuing to serve optimum quality and better service.*

*Our best wishes to improve all together...*



## Quality Policy

- Get the best out of our resources to secure the continuity of customer satisfaction and guarantee "satisfied customer" principle within our whole organizational structure
- Exist with an institutional culture understanding respectful to environmental and social values
- Inhabit and perpetuate the team spirit and secure the satisfaction of the team
- Use and lead the rapidly developing production technology and bring plus values to our sector
- Improve continuously the quality and kinds of our products and the service we provide
- be in accordance with the quality management system requirements

### Our Mission

- Produce goods according to customer needs and secure a continuous "customer satisfaction"

### Our Vision

- To be a reliable, well known, respected brand in our sector

---

## Customer Satisfaction Policy

- Accept as our basic principle to supply customer demands towards customer satisfaction and to return back all feedback including complaints) as soon as possible
- Focus all our working systematic for customer satisfaction,
- Consider and recognize the provisions of laws and regulations, our fiscal and management conditions, and all feedbacks placed from our customers, staff, and other parties

---

## Environmental Policy

- Lower the use of hazardous materials during the production steps in order to reduce the operations harmful to human health and environment.
- Follow the environmental laws and regulations
- Secure the continuous improvement by getting the support of all our employees

---

## Safety Policy

- Reduce the rate of accidents by analyzing the risks in order to develop a working environment which is based on health and security.
- Use the resources efficiently for health and security and provide the training of staff
- Secure the continuous improvement by obeying the law and regulations

## Quality Certificates



ISO 9001 - Quality Management System



ISO 10002 - Customer Satisfaction Management System



ISO 14001 - Environmental Management System



OHSAS 18001 Occupational Health and Safety Management System



ISO 27001 - Information Security Management System


## Product Certificates

IEC 61587-1

Mechanical Structures for Electronic Equipment - Tests for IEC 60917 and IEC 60297 series - Part 1: Environmental requirements, test set-up and safety aspects for cabinets, racks, subracks and chassis under indoor conditions





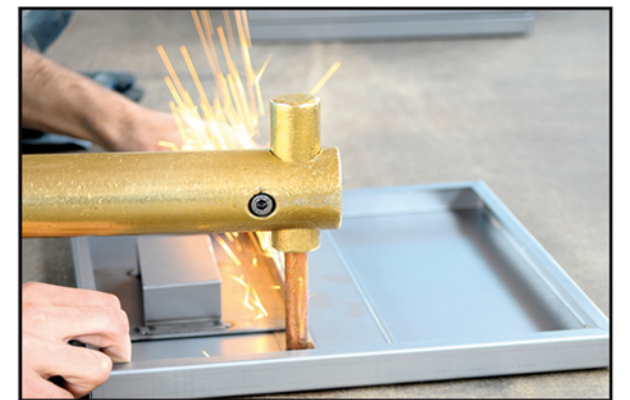





ACCESSORIES



Accessories

dataCENTER DCC SERVER CABINETS W600-W780



dataCENTER DCC Server  
Cabinets W600 - W780

SERVER CABINETS W600 - W780



Server Cabinets  
W600

NETWORK CABINETS W780



Network  
Cabinets W780

NETWORK CABINETS W600



Network  
Cabinets W600

WALL TYPE CABINETS  
SoHoFIX™ 19"  
WALLFIX™ 19"



Wall type cabinets


DCC SERVER™ 19"

SLIMSERVER™ 19"  
WIDESERVER™ 19"

STANDFIX™ 19"

STANDFIX™ 19"



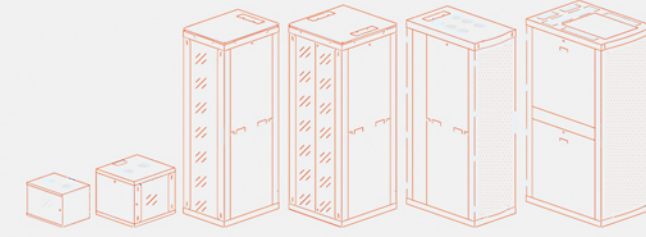

**GURKAN**

**UNIFLAT™ series**

**NETWORK CABINETS**  
**SoHOFIX™ 19"**  
**WALL TYPE**



U-height

**5U 7U 9U 12U**

**W520**

Width (mm)


Depth (mm)

**D310**

**D410**

[cabinet@gurkan.com.tr](mailto:cabinet@gurkan.com.tr)



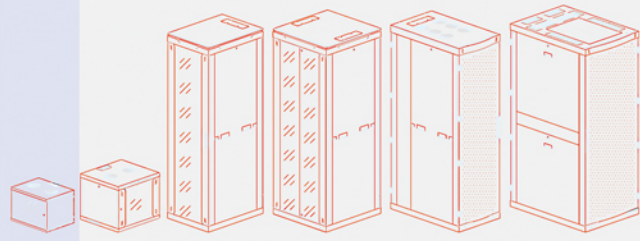

GURKAN

UNIFLAT™ series

SoHOFIX™ 19" WALL TYPE NETWORK CABINETS



## TECHNICAL SPECIFICATIONS

## Materials

- Steel Sheet Metal; DIN EN 10130
- Galvanized Sheet Metal; DIN EN 10327
- All Metal Parts (Except Mounting Rails) are Phosphated & Powder Paint Coated
- All Support Profiles and 19" Mounting Rails are manufactured from galvanized sheet metal
- All production materials are in accordance with RoHS Standards

## Dimensions

- 1U=44,45mm
- 19" = 482,6mm
- Width ( W )
- W=520mm, ( 20,6 inch )
- Depth(s) ( D )
- D=310mm ( 12,2 inch ), D=410mm, ( 16,1 inch )
- Inner Height(s) ( U, 1U=44,45mm )
- 5U, 7U, 9U, 12U

## Quality Certificates

- ISO 9001 - Quality Managements System
- ISO 14001 - Environmental Management System
- ISO 10002 - Customer Satisfaction Management System
- OHSAS 18001 - Occupational Health and Safety Management System
- ISO 27001 - Information Security Management System

## Product Certificate and Compliances

- EN 61587-1 Mechanical Structures Certificate for Electronic Equipment
- Protection Class IP20 according to EN 60529-1
- 19" Assembly and Applications according to DIN 340-D and EN 60297-1
- Mounting Applications according to EN 60917-2-1/-2
- Information Technology Device Safety Compliance according to EN 60950-1 and IEC 60364-7-707
- Surface Finishing and Powder Coating Applications according to DIN 67530 and ASTM D 2796



## Functionalities

- Ergonomic and Aesthetic Structure
- All Parts are Replaceable
- Cable Access Holes on Top (with Brush Strip) & Bottom of the Cabinet (with Brush Strip option)
- Max Load Capacity - 30 kg
- Easy Wall Mounting via Rear Panel
- Optional Levelling Feet or Castors
- Maximum Door Opening 180 °
- "U" markings on 19" mounting rails
- Depth adjustable 19" mounting rails

## Protection Class

- Protection Class IP20

## Grounding

- All Main Metal Parts with M6x10mm or M6x15mm Copper Coated Ground Studs

## Colors

- Ral 7035 Grey (Textured)

## Shipping Type

- Delivered in Monoblock or Flatpack (Easy Assembly)


Depth (mm)  
**520 x 310**  
**520 x 410**  
Width (mm)

**GURKAN**  
UNIFLAT™ series  
**SoHOFIX™ 19"**  
Wall Type  
Network Cabinets

12U  
9U  
7U  
5U

Configurations  
(W520xD310/D410)mm

- 1 x Bottom Panel
- 1 x Top Panel
- 2 x Side Panel
- 2 x 19" Mounting Rails
- 1 x Front Door (Framed Tempered Glass, Single Point Camlock)
- 1 x Wall Mounting Panel (Rear Panel)
- Color; Ral 7035 Grey (Textured)
- Delivered in Monoblock or Flatpack (Easy Assembly)

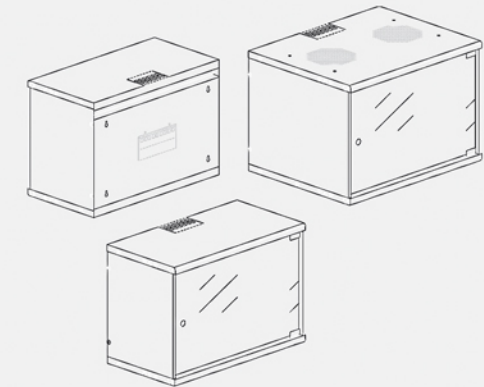

## Shipping Information

Dimensions in mm

| Product Code  | U   | Product Description            | Inner Height (hi) | Mounting Depth (d19) | Inner Depth max. (di) |
|---------------|-----|--------------------------------|-------------------|----------------------|-----------------------|
| SHX-0733-1-1M | 7U  | 7U 19" (W285xD310xH366)mm      | 232               | 200                  | 300                   |
| SHX-0553-1-1M | 5U  | 5U 19" (W520 x D310 x H280)mm  | 232               | 200                  | 300                   |
| SHX-0753-1-1M | 7U  | 7U 19" (W520 x D310 x H366)mm  | 321               | 200                  | 300                   |
| SHX-0953-1-1M | 9U  | 9U 19" (W520 x D310 x H454)mm  | 410               | 200                  | 300                   |
| SHX-1253-1-1M | 12U | 12U 19" (W520 x D310 x H590)mm | 545               | 200                  | 300                   |

W = 285 mm x **D=310 mm WALL TYPE SoHO CABINETS****SoHOFIX™ 10"**W = 520 mm x **D=310 mm WALL TYPE SoHO CABINETS****SoHOFIX™ 19"**W = 520 mm x **D=410 mm WALL TYPE SoHO CABINETS****SoHOFIX™ 19"**

|               |     |                                |     |     |     |
|---------------|-----|--------------------------------|-----|-----|-----|
| SHX-0554-1-1M | 5U  | 5U 19" (W520 x D410 x H280)mm  | 232 | 300 | 400 |
| SHX-0754-1-1M | 7U  | 7U 19" (W520 x D410 x H366)mm  | 321 | 300 | 400 |
| SHX-0954-1-1M | 9U  | 9U 19" (W520 x D410 x H454)mm  | 410 | 300 | 400 |
| SHX-1254-1-1M | 12U | 12U 19" (W520 x D410 x H590)mm | 545 | 300 | 400 |

| Net Weight (kg) | Gross Weight (kg) | Packing Dimensions ( Wp x Dp x Hp ) |
|-----------------|-------------------|-------------------------------------|
| 9,0             | 10,0              | 300 x 320 x 385                     |
| 9,0             | 10,0              | 540 x 320 x 300                     |
| 10,0            | 11,0              | 540 x 320 x 385                     |
| 11,5            | 12,5              | 540 x 320 x 470                     |
| 13,0            | 14,5              | 540 x 320 x 605                     |

|      |      |                 |
|------|------|-----------------|
| 10,0 | 12,5 | 540 x 420 x 300 |
| 11,5 | 13,5 | 540 x 420 x 390 |
| 13,5 | 15,0 | 540 x 420 x 475 |
| 16,5 | 18,5 | 540 x 420 x 610 |

## accessories

Page




- Air Circulation Modules ( Roof Type or 19" Type ) 91
- Horizontal Cable Organizers ( 19" Type ) 98
- Fixed and Sliding Shelves 84
- Horizontal and Vertical Energy Distribution Modules ( PDU ) 94
- Grounding Cable Sets 96
- Brush Strip Sets for Cable Access Holes 104



## Wall Type Cabinets

## U

12U  
9U  
7U  
5U

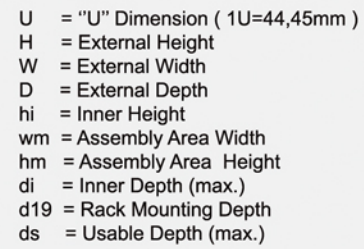



Dimensions in mm

Dimensions in mm


## WALL TYPE NETWORK CABINETS





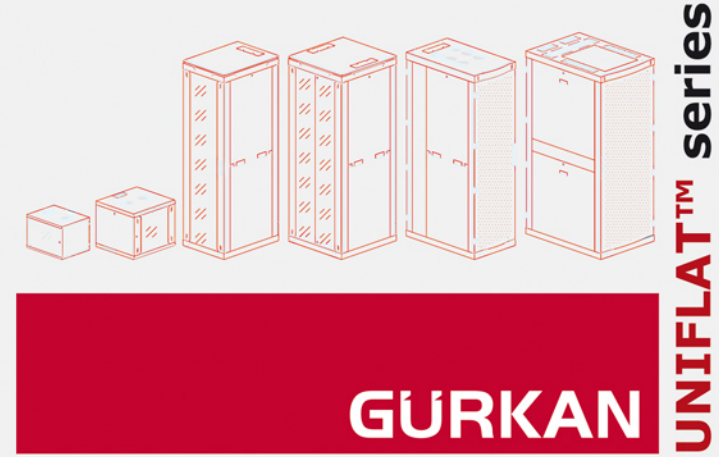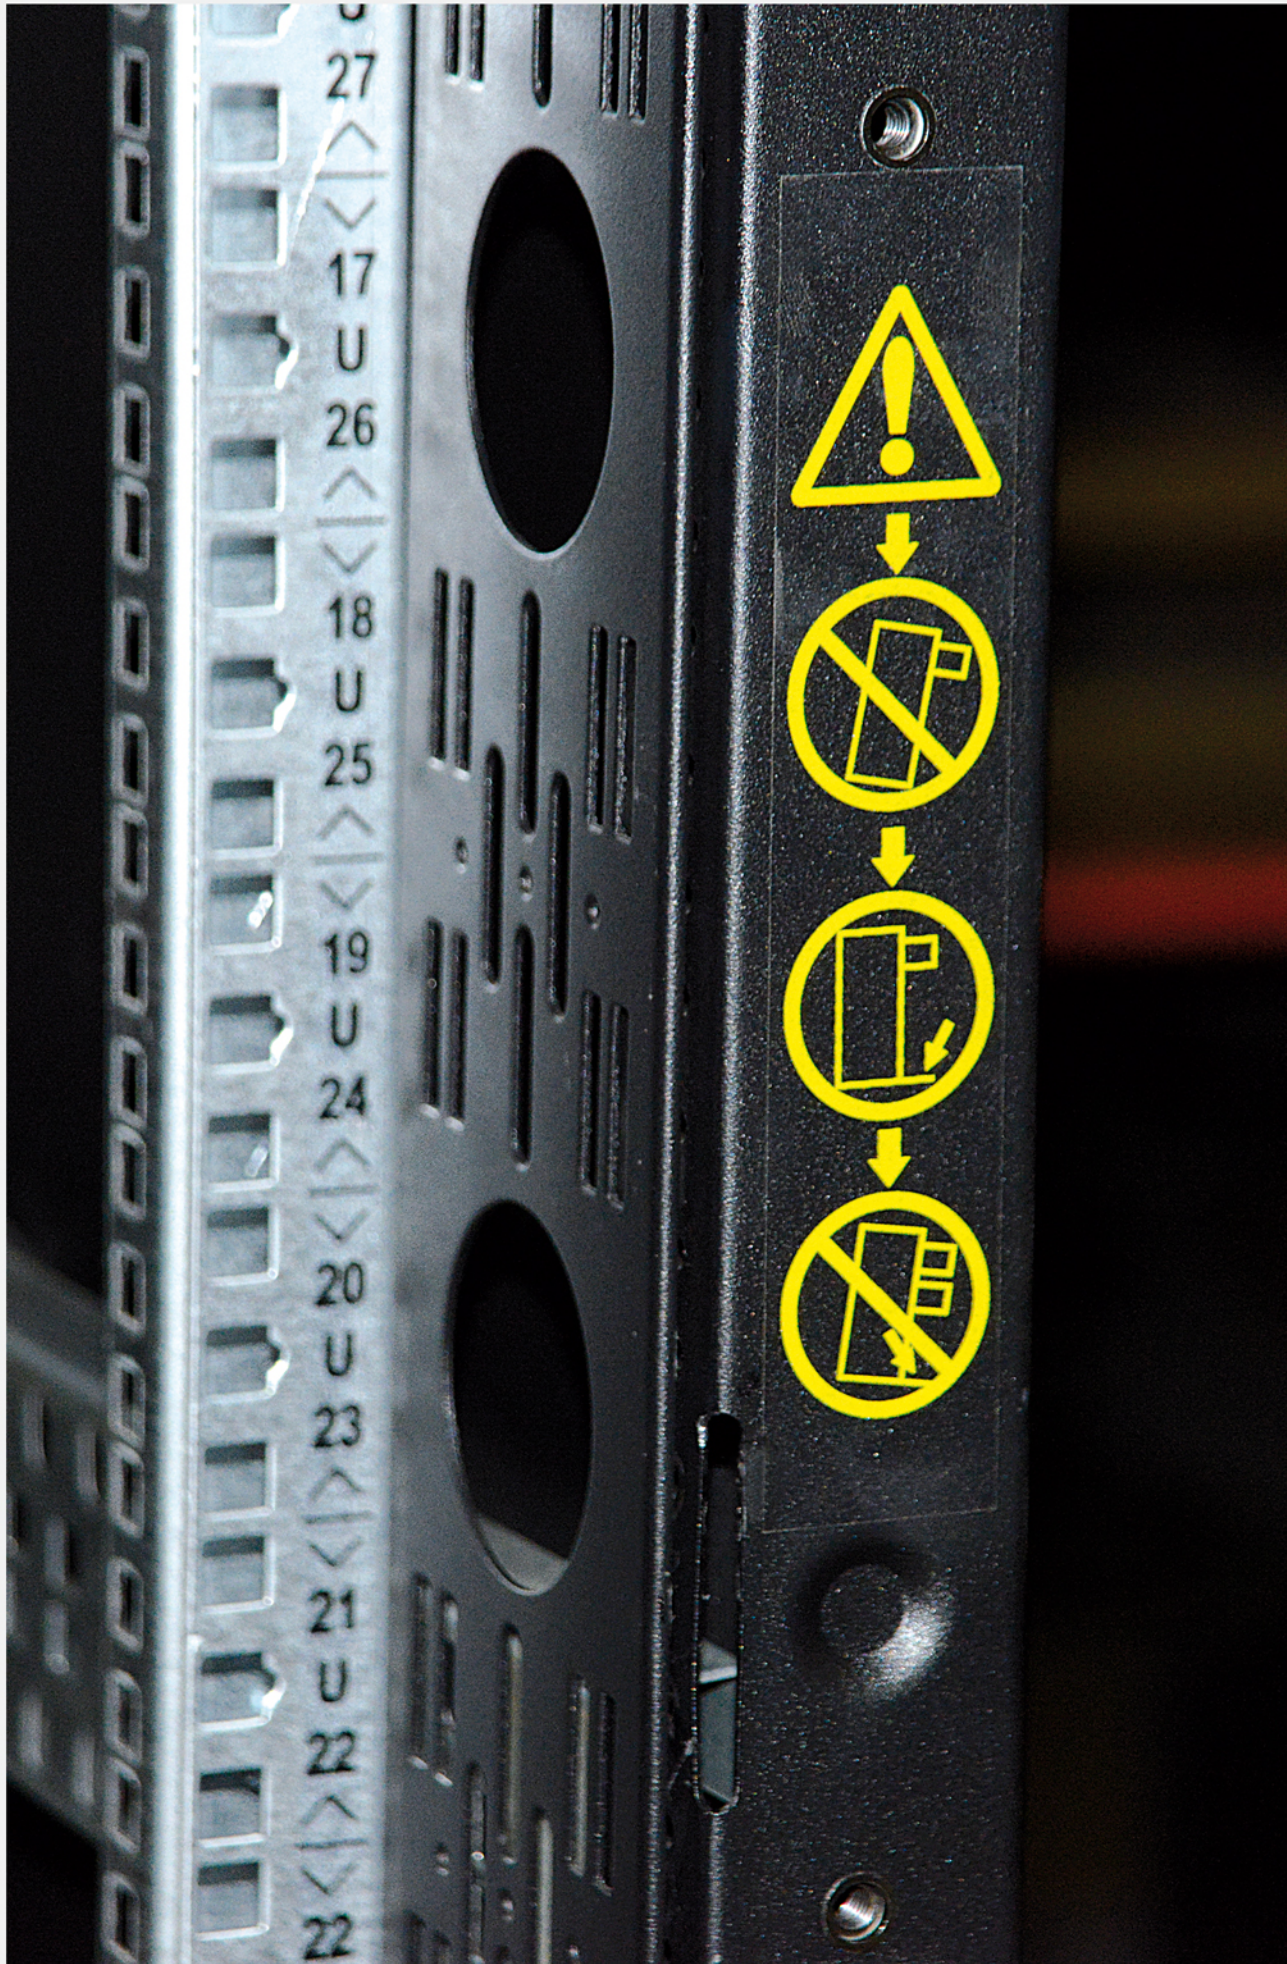

NETWORK CABINETS  
**WALLFIX™ 19"**  
WALL TYPE

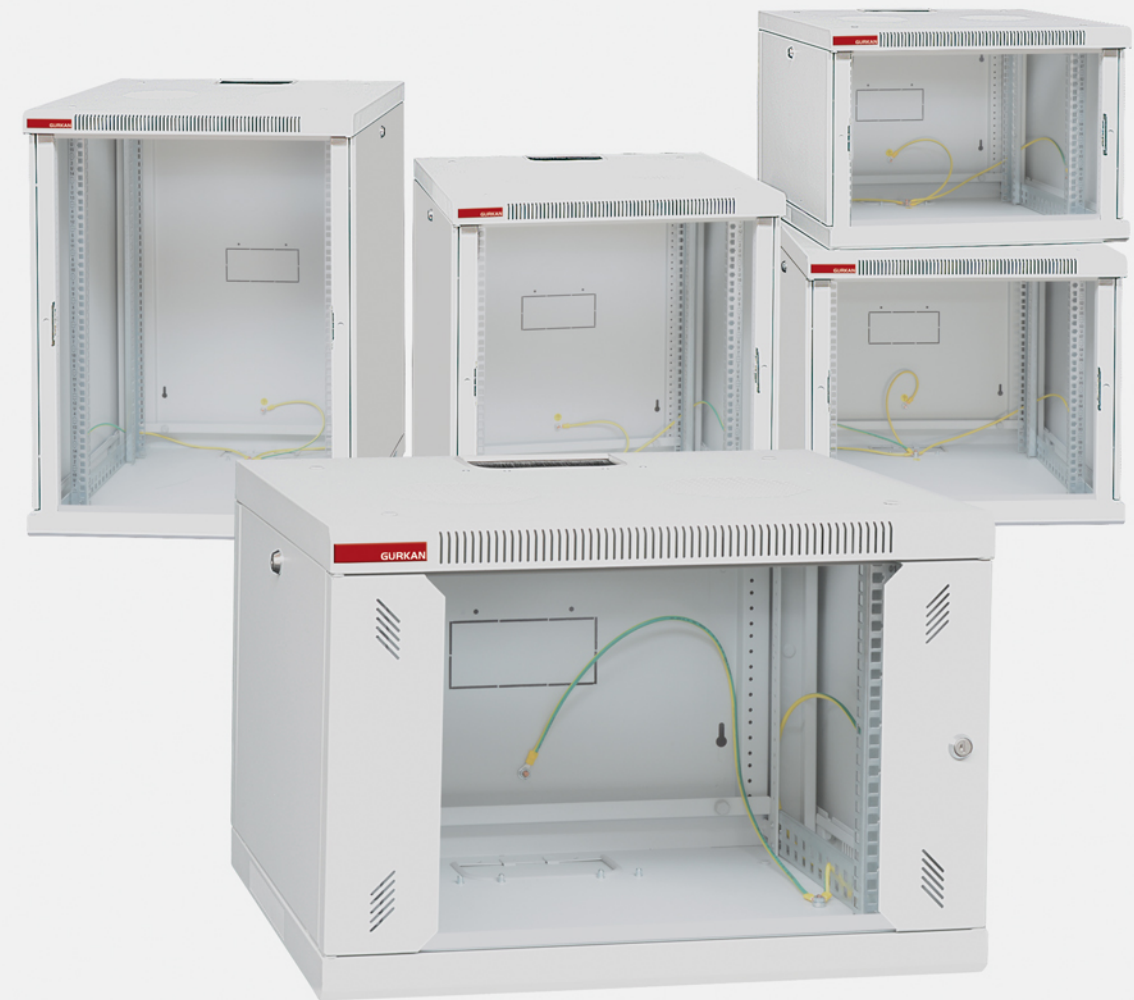

U-height

7U 9U 12U 15U 18U

**W600**

width (mm)


depth (mm)

D450

D560

[cabinet@gurkan.com.tr](mailto:cabinet@gurkan.com.tr)



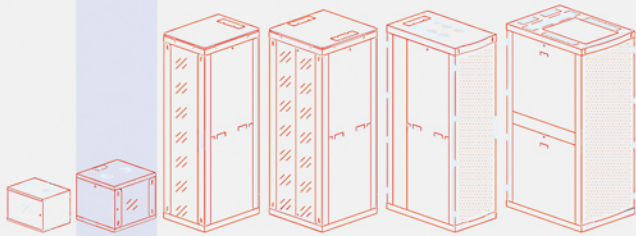

**GURKAN**  
**UNIFLAT™ series**

**WALLFIX™ 19" WALL TYPE NETWORK CABINETS**



**TECHNICAL SPECIFICATIONS**

**Materials**

- Steel Sheet Metal;DIN EN 10130
- Galvanized Sheet Metal; DIN EN 10327
- All Metal Parts (Except Mounting Rails) are Phosphated & Powder Paint Coated.
- All Support Profiles and 19" Mounting Rails are manufactured from galvanized sheet metal
- All production materials are in accordance with RoHS Standards

**Dimensions**

- 1U=44,45mm
- 19" = 482,6mm
- 
- Width ( W )
- W=600mm, ( 23,6 inch )
- 
- Depth(s) ( D )
- D=450mm ( 17,2 inch ), D=560mm, ( 22,0 inch )
- 
- Inner Height(s) ( U, 1U=44,45mm )
- 7U, 9U, 12U, 15U, 18U

**Quality Certificates**

- ISO 9001 - Quality Managements System
- ISO 14001 - Environmental Management System
- ISO 10002 - Customer Satisfaction Management System
- OHSAS 18001 - Occupational Health and Safety Management System
- ISO 27001 - Information Security Management System

**Product Certificate and Compliances**

- EN 61587-1, Mechanical Structures Certificate for Electronic Equipment
- Protection Class IP20 according to EN 60529-1
- 19" Assembly and Applications according to DIN 340-D and EN 60297-1
- Mounting Applications according to EN 60917-2-1/-2
- Information Technology Device Safety Compliance according to EN 60950-1 and IEC 60364-7-707
- Surface Finishing and Powder Coating Applications according to DIN 67530 and ASTM D 2796



**Functionalities**

- Ergonomic and Aesthetic Structure
- All Parts are Replaceable
- Framed Tempered Glass with Single Point Camlock
- Cable Access Holes on Top (with Brush Strip) & Bottom of the Cabinet (with Brush Strip option)
- Available for Cable Organization in all Directions inside the Cabinet
- Cable Storing Space under the Cabinet (for Heavy Cabling)
- Air Circulation, max.250m3/h
- Max Load Capacity - 100kg
- Easy Wall Mounting via Rear Panel
- Cable Access Holes (Sliding Lid or with Brush Strip Strips)
- Optional Levelling Feet or Castors
- Maximum Door Opening 180 °
- Side Panels; Lockable & Removable
- "U" Markings on 19" Mounting Rails
- Mobile 19' Mounting Profiles (Back and Forth)

**Protection Class**

- Protection Class IP20

**Grounding**

- All Main Metal Parts with M6x10mm or M6x15mm Copper Coated Ground Studs
- Grounding with Cable Set on Doors

**Colors**

- Standard, Ral 7035 Grey (Textured)
- Optional, Ral 9005 Black (Textured)


**Shipping Type**

- Delivered in Monoblock or Flatpack (Easy Assembly)

Depth (mm)  
**600 x 450**  
**600 x 560**  
Width (mm)

**GURKAN**  
**UNIFLAT™ series**  
**WALLFIX™ 19"**  
**Wall Type**  
**Network Cabinets**


18U  
15U  
12U  
9U  
7U



**Configurations**  
**(W600xD450/D560)**

- 1 x Bottom Panel
- 1 x Top Panel
- 4 x Edge Profiles
- 4 x Support Profiles for Depth
- 4 x 19" Mounting Rails (\*)
- 2 x Side Panels (Single Point Locked Door)
- 1 x Framed Tempered Glass with Single Point Camlock
- 1 x Wall Mounting Panel (Rear Panel)
- Color; Ral 7035 Grey (Textured)
- Delivered in Monoblock or Flatpack (Easy Assembly)

(\*) 2 pcs in D = 450mm Cabinets

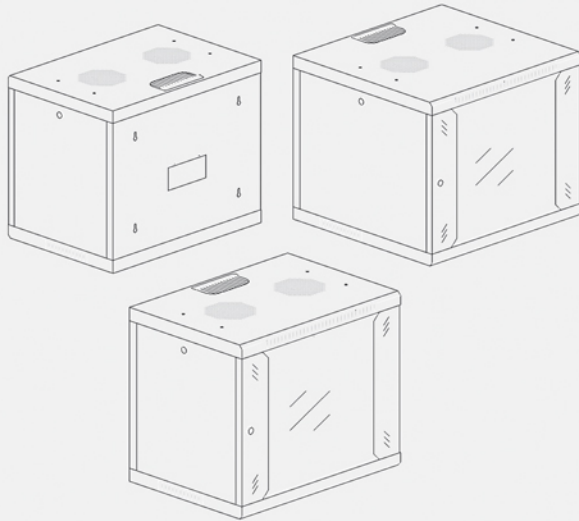

**Shipping Information**




| Product Code                             | U   | Product Description            | Inner Height (hi) | Mounting Depth (d19) | Inner Depth max. (di) | Net Weight (kg) | Gross Weight (kg) | Packing Dimensions ( Wp x Dp x Hp ) |
|------------------------------------------|-----|--------------------------------|-------------------|----------------------|-----------------------|-----------------|-------------------|-------------------------------------|
| W = 600 mm x D=450 mm WALL TYPE CABINETS |     |                                |                   |                      |                       | WALLFIX™ 19"    |                   |                                     |
| WFS-0764-1-1M                            | 7U  | 7U 19" (W600 x D450 x H415)mm  | 357               | 255                  | 400                   | 17,0            | 19,5              | 620 x 470 x 435                     |
| WFS-0964-1-1M                            | 9U  | 9U 19" (W600 x D450 x H502)mm  | 446               | 255                  | 400                   | 19,0            | 22,0              | 620 x 470 x 520                     |
| WFS-1264-1-1M                            | 12U | 12U 19" (W600 x D450 x H637)mm | 579               | 255                  | 400                   | 22,0            | 25,5              | 620 x 470 x 655                     |
| WFS-1564-1-1M                            | 15U | 15U 19" (W600 x D450 x H770)mm | 712               | 255                  | 400                   | 25,5            | 29,5              | 620 x 470 x 795                     |
| WFS-1864-1-1M                            | 18U | 18U 19" (W600 x D450 x H903)mm | 846               | 255                  | 400                   | 28,5            | 33,0              | 620 x 470 x 925                     |
| W = 600 mm x D=560 mm WALL TYPE CABINETS |     |                                |                   |                      |                       | WALLFIX™ 19"    |                   |                                     |
| WFS-0765-1-1M                            | 7U  | 7U 19" (W600 x D560 x H415)mm  | 357               | 365                  | 510                   | 19,5            | 22,0              | 620 x 580 x 435                     |
| WFS-0965-1-1M                            | 9U  | 9U 19" (W600 x D560 x H502)mm  | 446               | 365                  | 510                   | 21,5            | 24,5              | 620 x 580 x 520                     |
| WFS-1265-1-1M                            | 12U | 12U 19" (W600 x D560 x H637)mm | 579               | 365                  | 510                   | 25,0            | 28,0              | 620 x 580 x 655                     |
| WFS-1565-1-1M                            | 15U | 15U 19" (W600 x D560 x H770)mm | 712               | 365                  | 510                   | 28,0            | 32,0              | 620 x 580 x 795                     |
| WFS-1865-1-1M                            | 18U | 18U 19" (W600 x D560 x H903)mm | 846               | 365                  | 510                   | 32,0            | 36,0              | 620 x 580 x 925                     |

**accessories**

|                                                               | Page |
|---------------------------------------------------------------|------|
| - Air Circulation Modules ( Roof Type or 19" Type )           | 91   |
| - Horizontal Cable Organizers ( 19" Type )                    | 98   |
| - Fixed and Sliding Shelves                                   | 84   |
| - Horizontal and Vertical Energy Distribution Modules ( PDU ) | 94   |
| - Grounding Cable Sets                                        | 97   |
| - Castors                                                     | 96   |
| - Brush Strip Sets for Cable Access Holes                     | 104  |



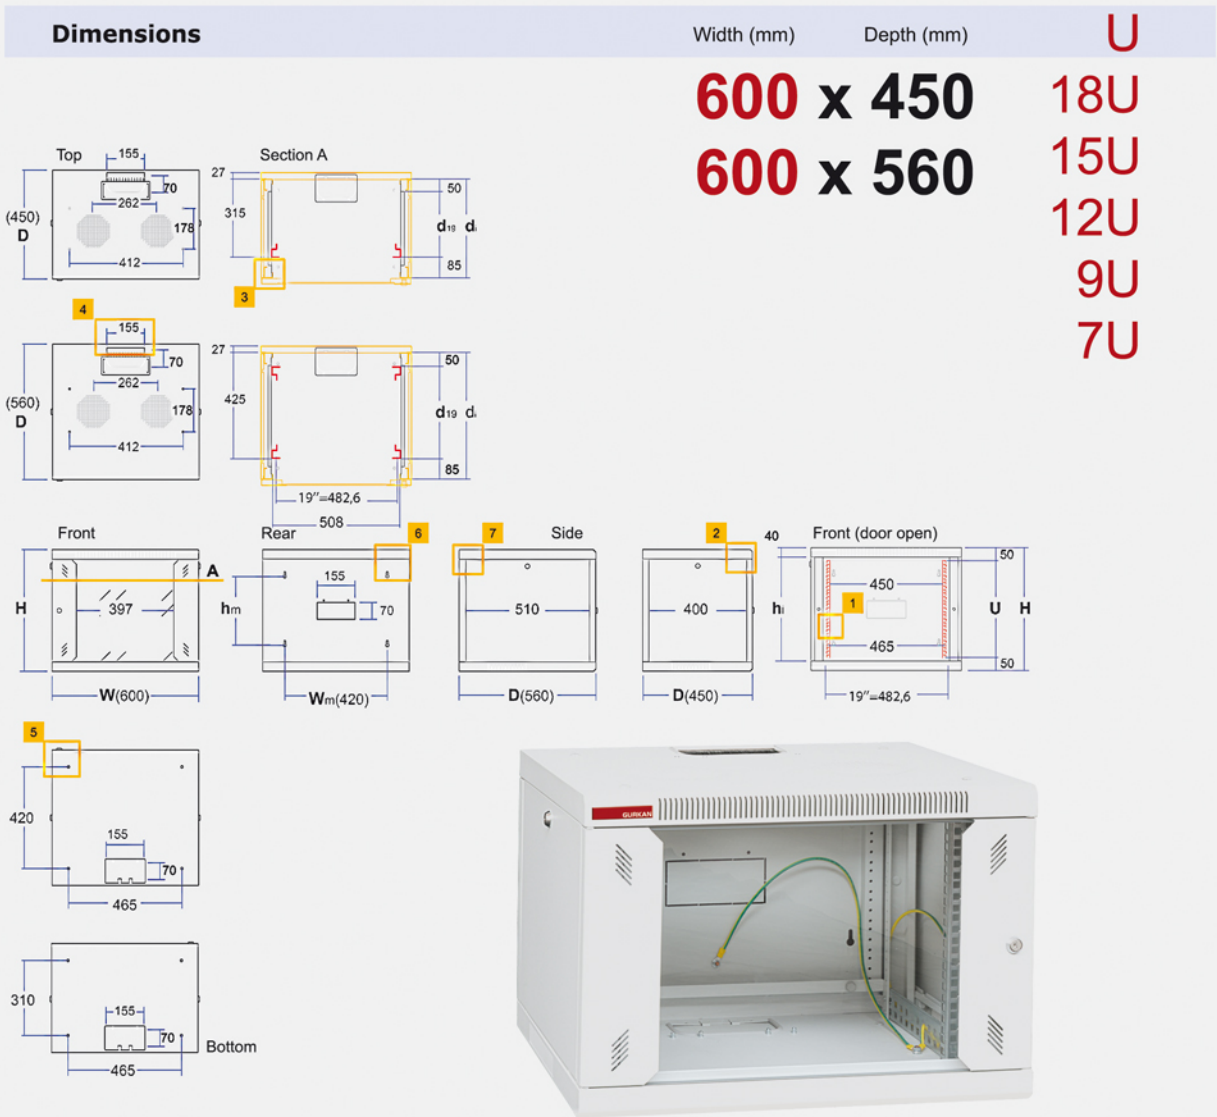

U = "U" Dimension ( 1U=44,45mm )  
H = External Height  
W = External Width  
D = External Depth  
hi = Inner Height  
wm = Assembly Area Width  
hm = Assembly Area Height  
di = Inner Depth (max.)  
d19 = Rack Mounting Depth  
ds = Usable Depth (max.)

W = 600 mm x **D=450 mm**

| U   | W (mm) | D (mm) | H (mm) | hi (mm) | hm (mm) | Wm (mm) | d19 (mm) | di (mm) | ds (mm) |
|-----|--------|--------|--------|---------|---------|---------|----------|---------|---------|
| 7U  | 600    | 450    | 415    | 357,0   | 195,0   | 420,0   | 260,0    | 400,0   | 315,0   |
| 9U  |        |        | 502    | 446,0   | 284,0   |         |          |         |         |
| 12U |        |        | 637    | 579,0   | 417,0   |         |          |         |         |
| 15U |        |        | 770    | 712,0   | 551,0   |         |          |         |         |
| 18U |        |        | 903    | 846,0   | 684,5   |         |          |         |         |

1U = 44,45 mm




Dimensions in mm

W = 600 mm x **D=560 mm**


| U   | W (mm) | D (mm) | H (mm) | hi (mm) | hd (mm) | Wd (mm) | d19 (mm) | di (mm) | ds (mm) |
|-----|--------|--------|--------|---------|---------|---------|----------|---------|---------|
| 7U  | 600    | 560    | 415    | 357,0   | 195,0   | 420,0   | 370,0    | 510,0   | 425,0   |
| 9U  |        |        | 502    | 446,0   | 284,0   |         |          |         |         |
| 12U |        |        | 637    | 579,0   | 417,0   |         |          |         |         |
| 15U |        |        | 770    | 712,0   | 551,0   |         |          |         |         |
| 18U |        |        | 903    | 846,0   | 684,5   |         |          |         |         |

1U = 44,45 mm

Dimensions in mm

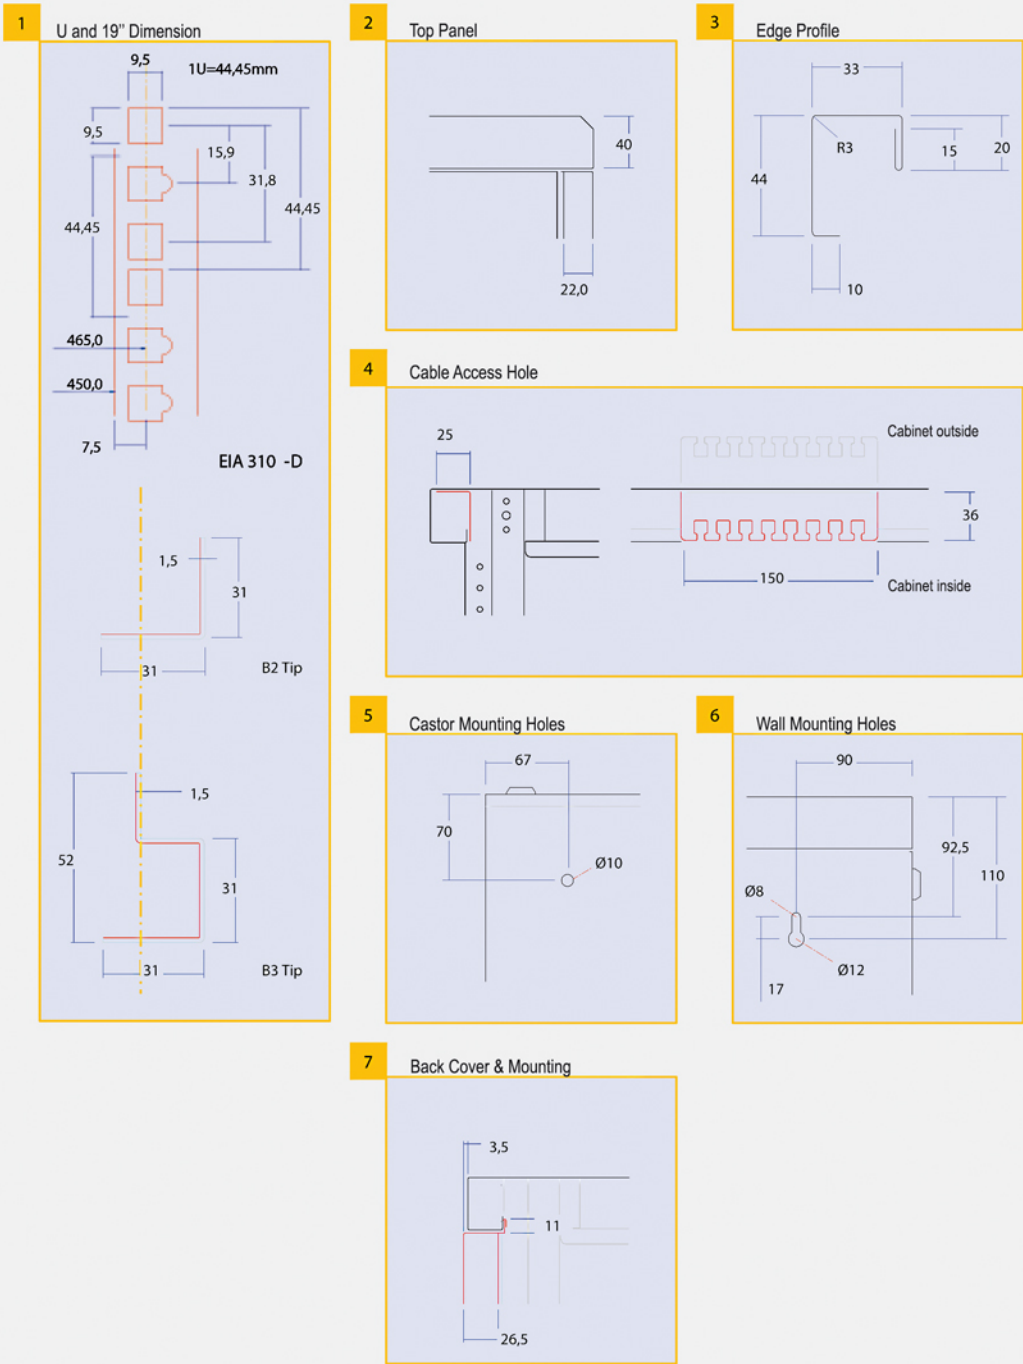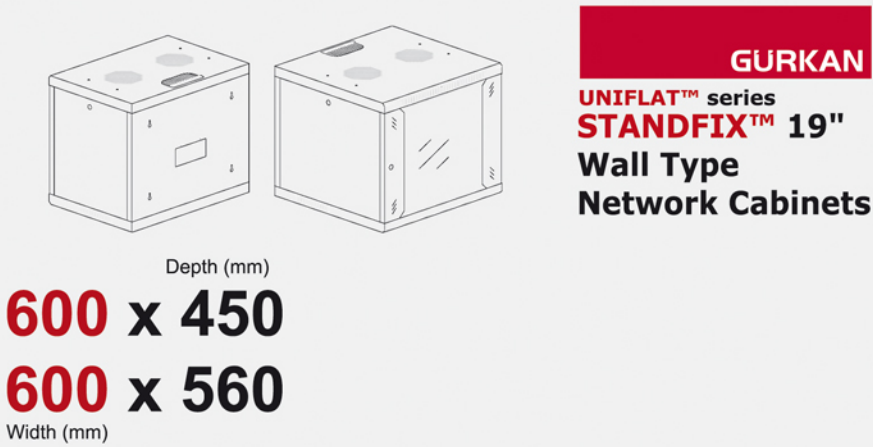




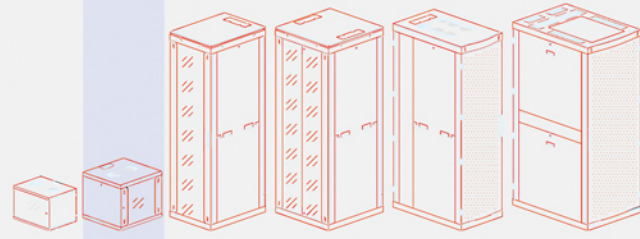

GURKAN


WALLFIX™ series

WALLFIX™ 19" WALL TYPE NETWORK CABINETS

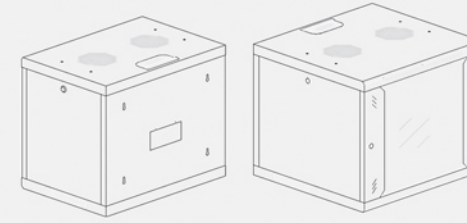

GURKAN

UNIFLAT™ series  
**WALLFIX™ 19"**  
 Wall Type  
 Network Cabinets

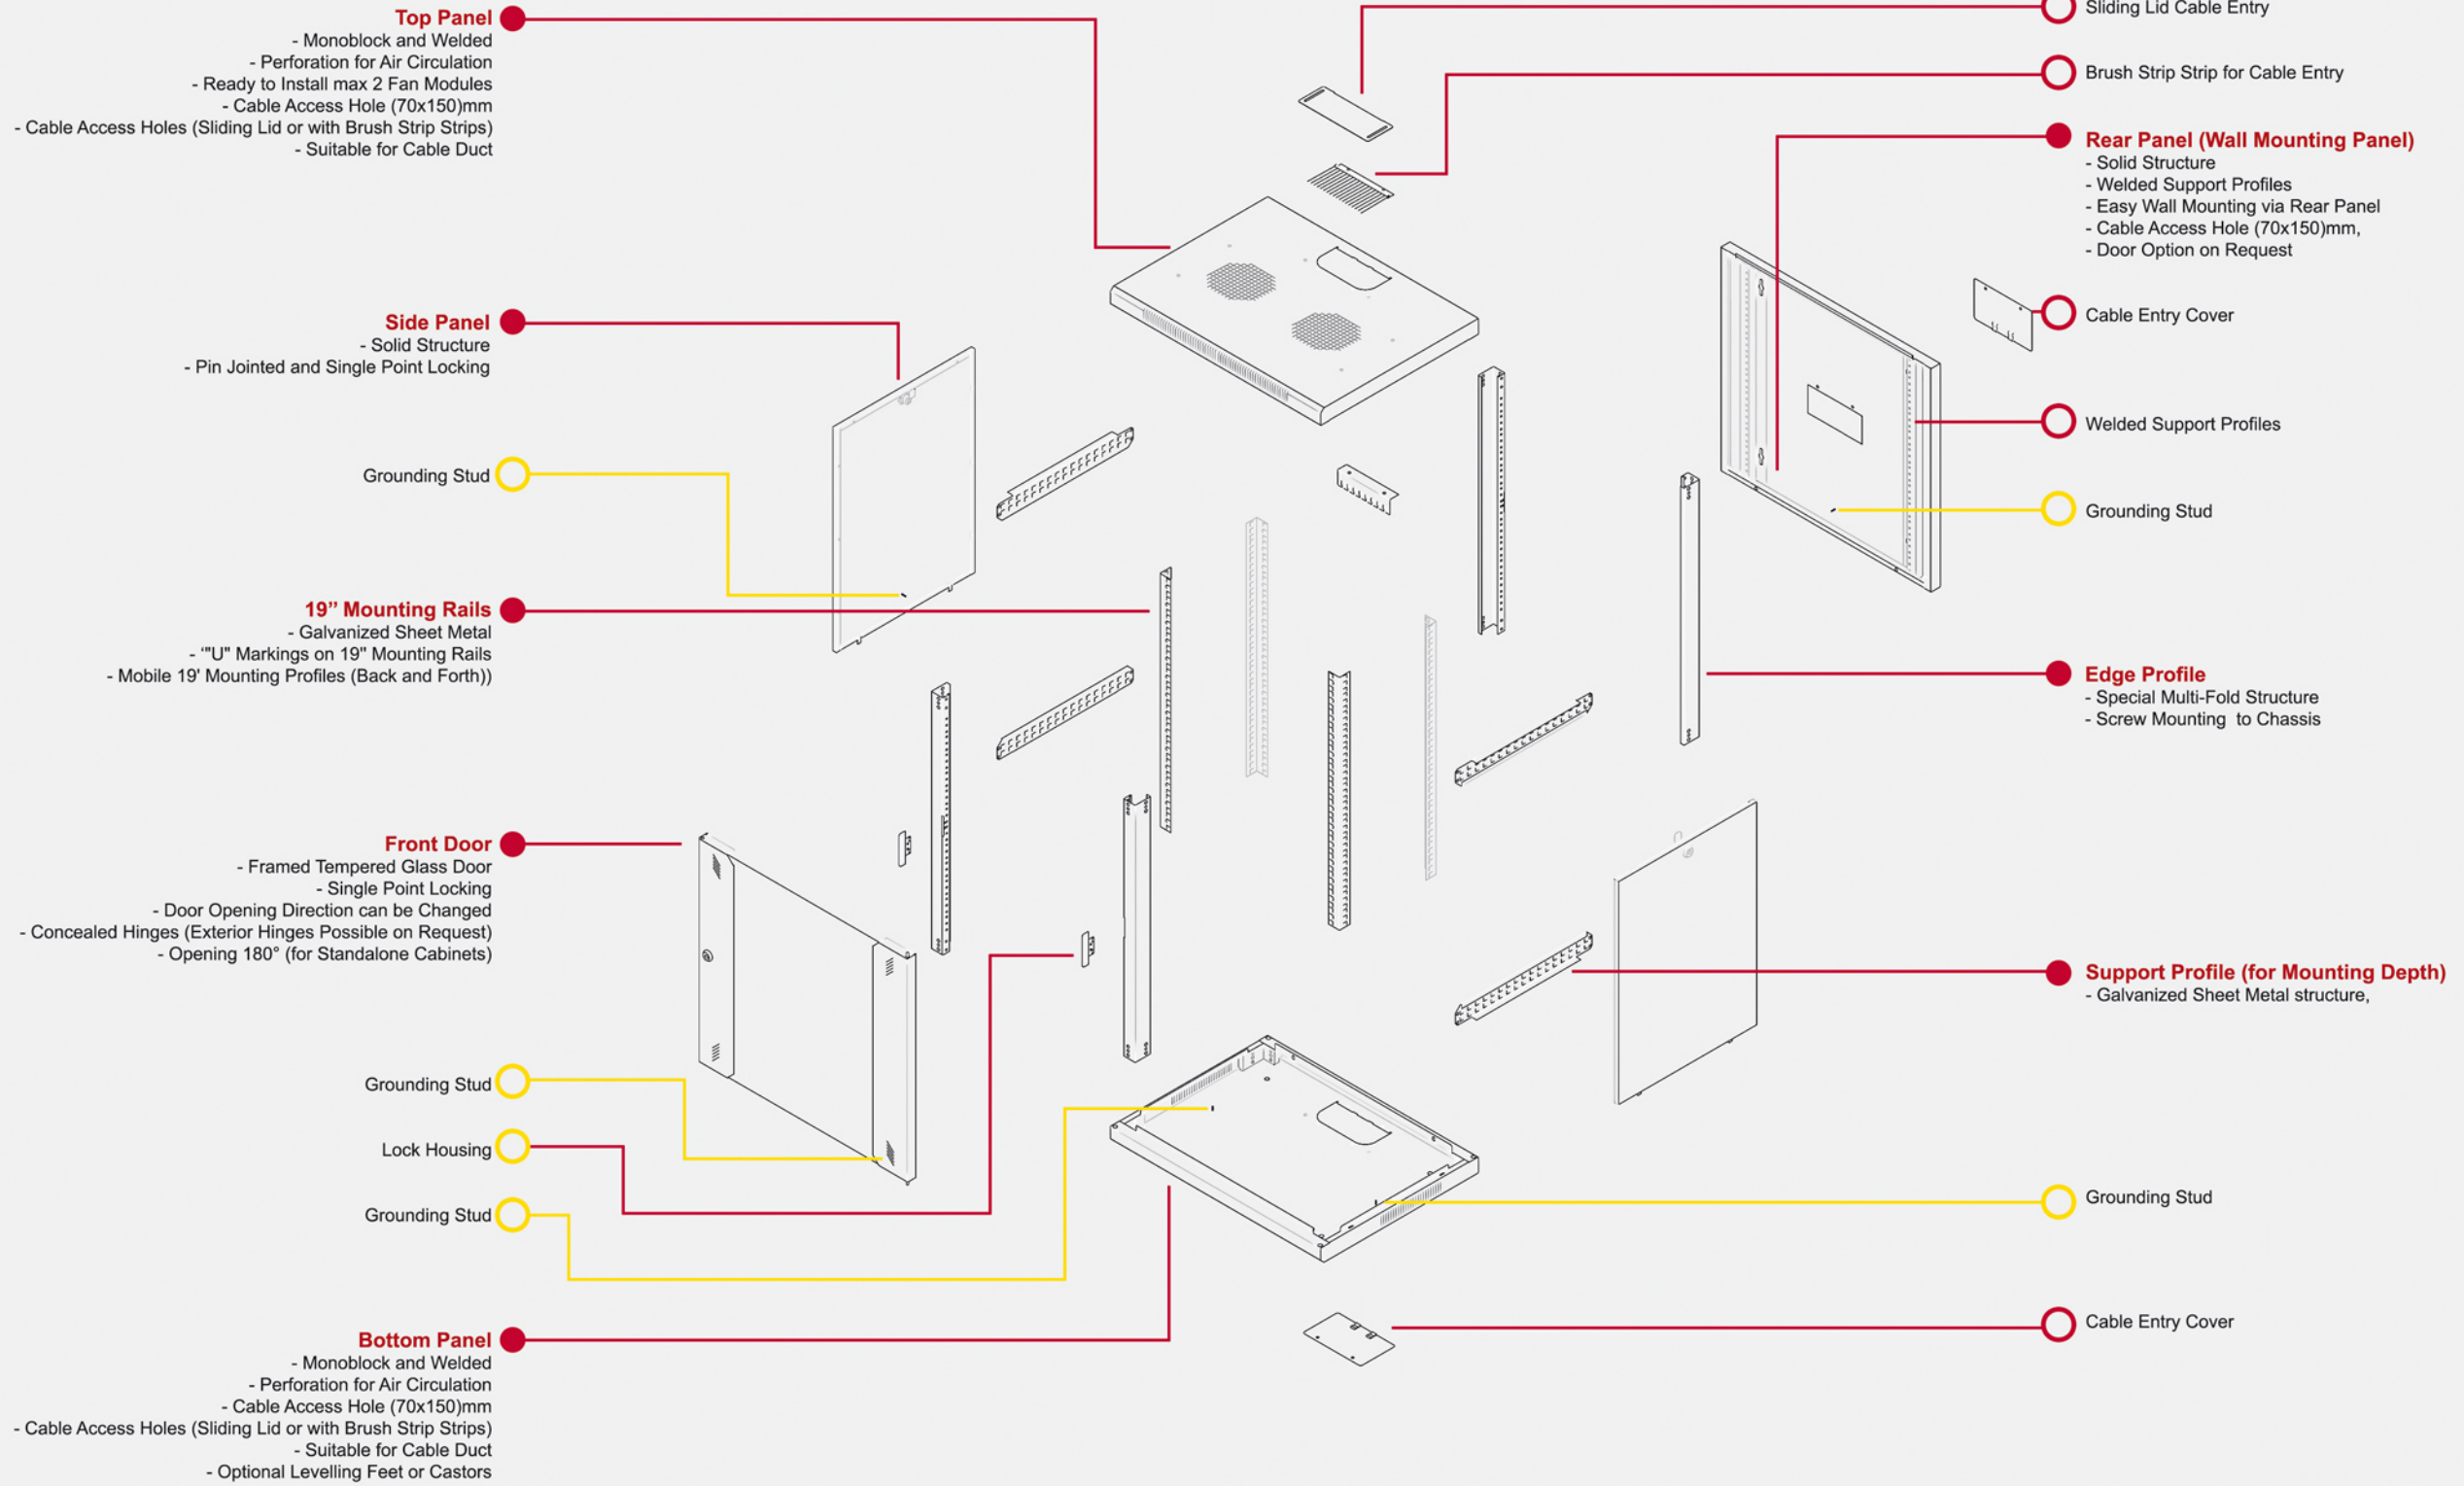





## Structure

Monoblock-Welded  
Top & Bottom Panels

Screwed Corner Profiles to  
Chassis

Chassis Built from Welded  
Joint Corners

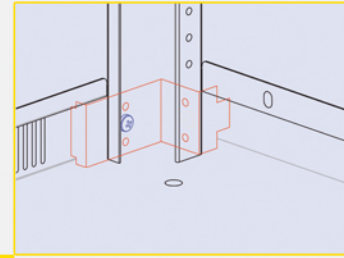




8 Welded Corner Bracket Mounting



## 19" Profiles

4 x Support Profile

Mobile 19" Mounting Profiles  
(Back and Forth)

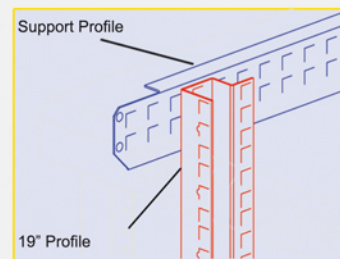

9 Support Profile Mounting

2 x for 350mm Deep Cabinets  
2 x for 450mm Deep Cabinets  
4 x for 560mm Deep Cabinets




## Front Door



Framed Tempered Glass Door

4mm Tempered Glass  
Frame Screwed from 4 Points

Concealed Hinges (Exterior  
Hinges Possible on Request)



Right



Left

Opening 180° (for Standalone Cabinets)  
Door Opening Direction can be Changed



GURKAN



UNIFLAT™ series  
**WALLFIX™ 19"**  
Wall Type  
Network Cabinets

## Side Panels

Removable, Lockable

Pin Jointed and Single Point  
Locking


Identical Locks (Key Alike)






Rear Panel


Welded Support Profiles  
Easy Wall Mounting via  
Rear Panel

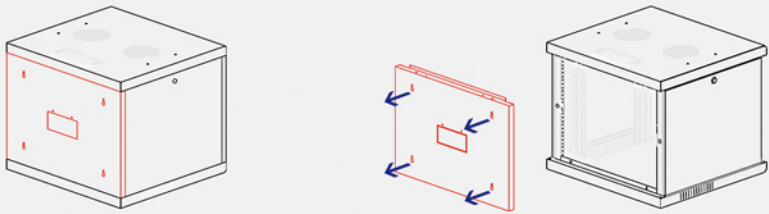

4-Point Wall Mounting Holes  
Steel Anchors to be used for  
Secure Mounting

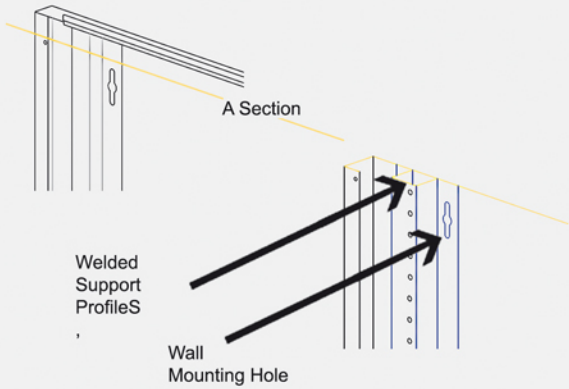


**GURKAN**  
UNIFLAT™ series  
**WALLFIX™ 19"**  
Wall Type  
Network Cabinets

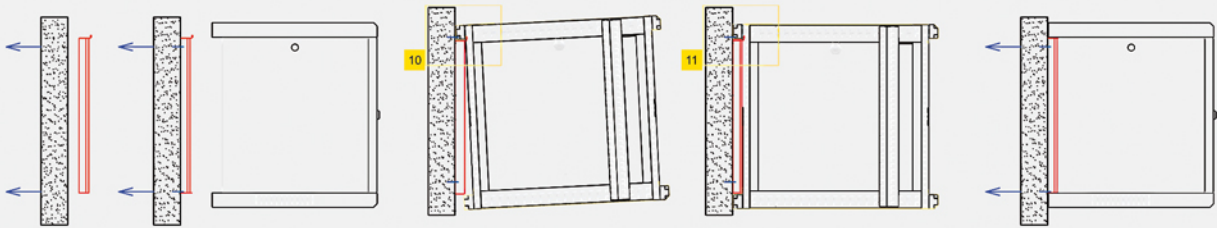

Easy Wall Mounting via Rear  
Panel (10,11 )  
Mounting from Inside  
Not Removable from Outside




10 Mounting Position-1

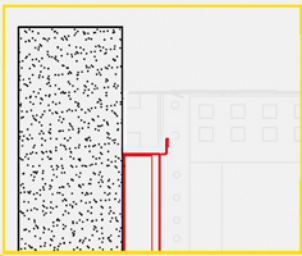

11 Mounting Position-2


Cabling

Cable Access Holes on Top (with Brush Strip) & Bottom  
of the Cabinet (with Brush Strip option).

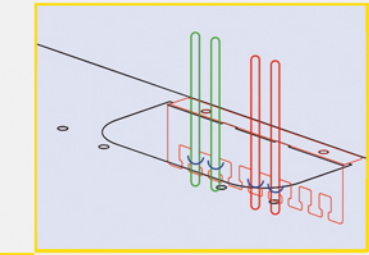

12 Cabling Details


Cable Access Hole (70x150)mm  
(12)

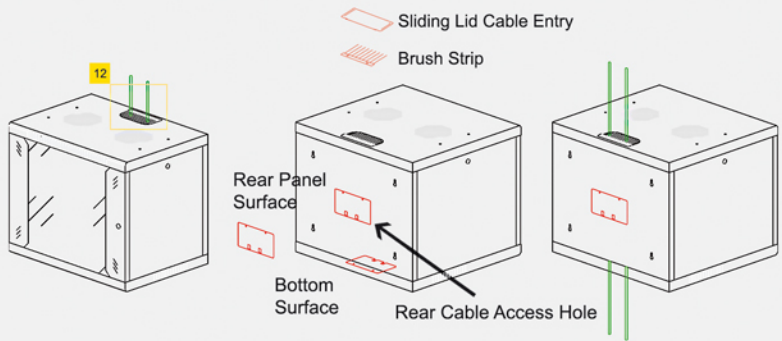

Cable Access Holes (Sliding Lid or with  
Brush Strip Strips) (13)

Unused Holes can be Closed with  
Covers (13)

13 Cable Access Hole Cover

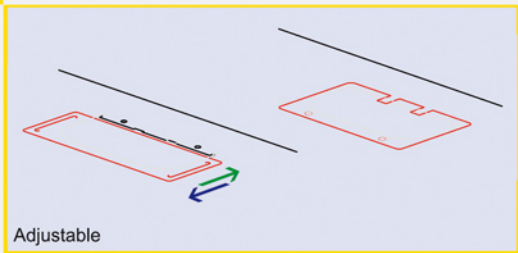

Adjustable

**GURKAN**  
UNIFLAT™ series  
**WALLFIX™ 19"**  
Wall Type  
Network Cabinets





## Air Circulation

Air Circulation Provided by the Holes Placed at Top & Bottom Panels


Hot Air Exits the Cabinet through the Holes Placed at the Top Panel

Interior Air Circulation is Provided by Top Mounted Fan Modules


250m³/h Air Circulation can be Provided in Forced Air Circulation Implementations

Interior Temperature equals to Ambient Operating Temperature ( $T_1 = T_3$ ) with this Implementation

Forced Air Circulation may not be necessary in Air-Conditioned Operating Environments

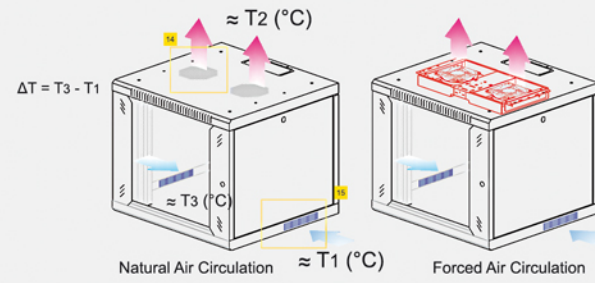


14 Air Exit on Top Panel

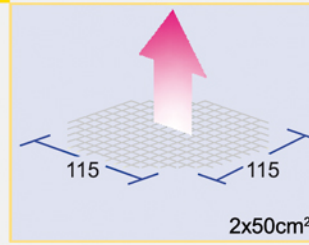


$T_1$  = Inlet Temperature (°C)  
 $T_2$  = Outlet Temperature (°C)  
 $T_3$  = Inner Cabinet Temperature (°C)  
 $\Delta T$  = Temperature Difference (°C)

15 Air Entry at Bottom Panel

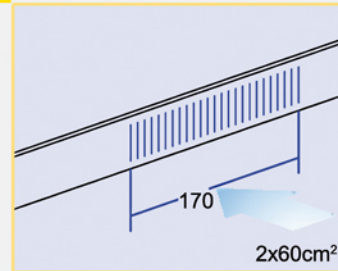

Holes Can be Closed when Fan Modules are not Used


Fan Holes Closure Panel



**GURKAN**  
**UNIFLAT™ series**  
**WALLFIX™ 19"**  
**WALL TYPE**  
**NETWORK CABINETS**





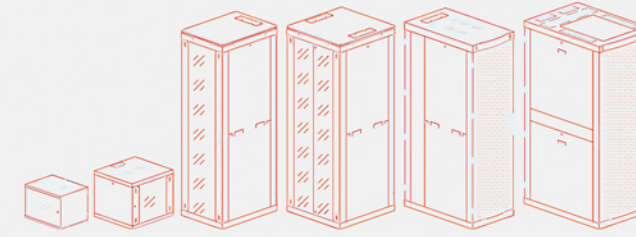

**GURKAN**

**UNIFLAT™ series**

**NETWORK CABINETS**  
**STANDFIX™ 19"**  
**TYPE**  
**W600**



U-height

**47U 44U 42U 36U 32U 26U 22U**

**W600**  
Width (mm)


Depth (mm)  
D600  
D780  
D1000

[cabinet@gurkan.com.tr](mailto:cabinet@gurkan.com.tr)

**STANDFIX™ 19"**

**STANDING TYPE NETWORK CABINETS**



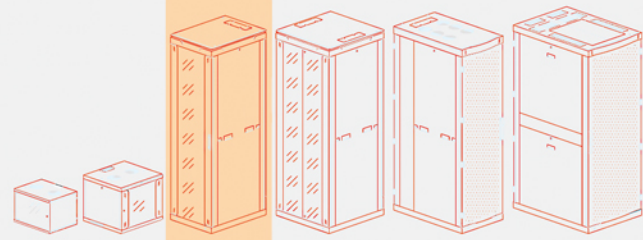

GURKAN

UNIFLAT™ series

STANDFIX™ 19" STANDING TYPE NETWORK CABINETS W600

## TECHNICAL SPECIFICATIONS

## Materials

- Steel Sheet Metal; DIN EN 10130
- Galvanized Sheet Metal; DIN EN 10327
- All Metal Parts (Except Mounting Rails) are Phosphated & Powder Paint Coated
- All Support Profiles and 19" Mounting Rails are Manufactured from Galvanized Sheet Metal
- All production materials are in accordance with RoHS Standards

## Dimensions

- 1U=1HU=44,45mm
- 19" = 482,6mm
- Width ( W )
- W=600mm ( 23,6 inch )
- Depth(s) ( D )
- D=600mm ( 23,6 inch )
- D=800mm ( 31,5 inch )
- D=1000mm ( 39,3 inch )
- Inner Height(s) ( 1U=44,45mm )
- 22U, 26U, 32U, 36U, 42U, 44U, 47U

## Quality Certificates

- ISO 9001 - Quality Managements System
- ISO 14001 - Environmental Management System
- ISO 10002 - Customer Satisfaction Management System
- OHSAS 18001 - Occupational Health and Safety Management System
- ISO 27001 - Information Security Management System

## Product Certificate and Compliances

- EN 61587-1, Mechanical Structures Certificate for Electronic Equipment
- Protection Class IP20 according to EN 60529-1
- Mounting Applications according to EN 60917-2-1/-2
- Information Technology Device Safety Compliance according to EN 60950-1 and IEC 60364-7-707
- Surface Finishing and Powder Coating Applications according to DIN 67530 and ASTM D 2796

## Protection Class

- Protection Class IP20



## 19 " Assembly

- 1U=1HU=44,45mm
- 19" = 482,6mm
- 19" Assembly and Applications according to DIN 340-D and EN 60297-1
- "U" Markings on 19" Mounting Rails
- Mobile 19" Mounting Profiles (Back and Forth)

## Colors

- Standard, Ral 9005 Black (Textured)
- Optional, Ral 7035 Grey (Textured)

## Shipping Type


- Delivered in Monoblock or Flatpack (Easy Assembly)
- Delivered on Pallet

Depth (mm)  
**600 x 600**  
**600 x 780**  
**600 x 1000**  
 Width (mm)

GURKAN

UNIFLAT™ series  
**STANDFIX™ 19"**  
**W600 Standing Type**  
**Network Cabinets**

47U  
 44U  
 42U  
 36U  
 32U  
 26U  
 22U

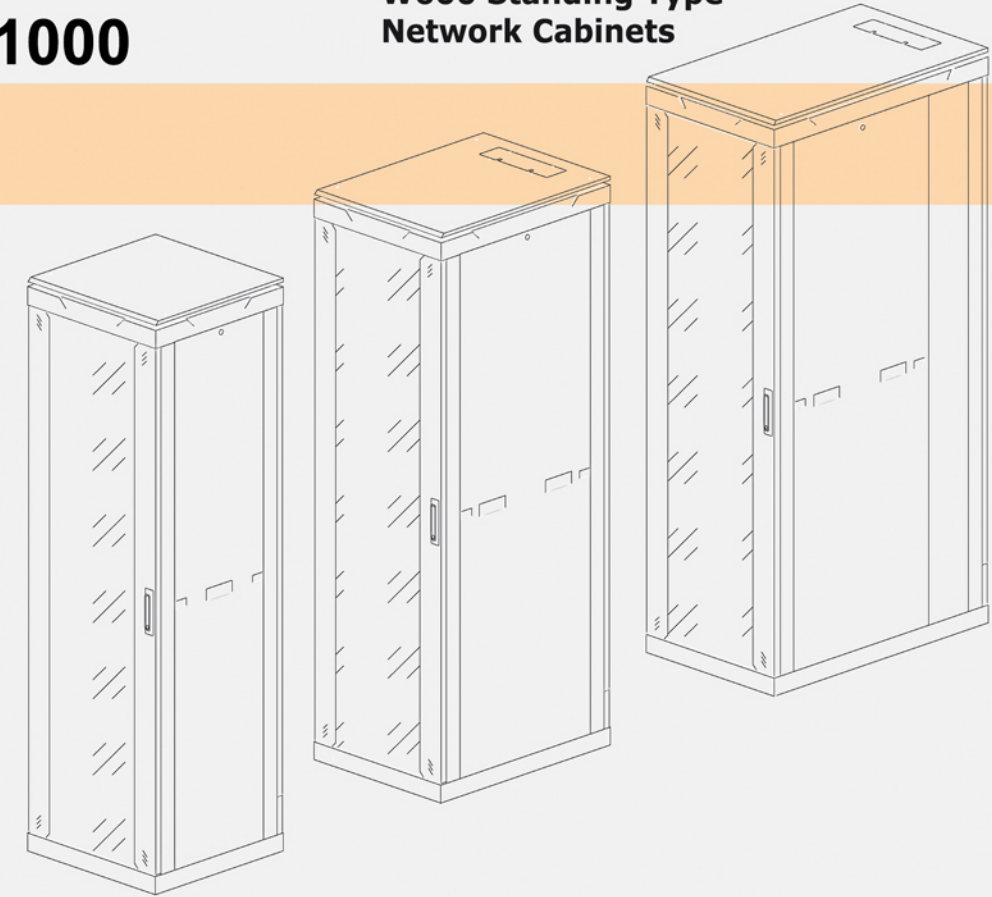

## Mechanical Structure and Functionalities

## General

- Ergonomic and Aesthetic Structure
- Anti-Noise Plastic Buffers
- All Parts are Replaceable
- Side-by-Side Mounting and Inner Segmentation
- Available for Cable Organization in all Directions inside the Cabinet
- Air Circulation, max.1000m3/h
- Max Load Capacity – 1.250 kg (Stationary)
- Max Load Capacity – 1.000 kg (Mobile)
- 4 Lifting Points on Top

## Top Panel

- Monoblock and Welded
- Perforation for Air Circulation
- Ready to Install max 4 Fan Modules

## Bottom Panel

- Monoblock and Welded
- Flat Surface
- Cable Access Hole (300x300 mm)
- Optional Levelling Feet or Castors

## Top Cover

- Monoblock and Welded
- Adjustable Air Gap between Top Panel
- Cable Access Holes (Sliding Lid or with Brush Strip Strips)
- Ceiling Mount Option with Fixing Kit

## Edge Profiles

- Closed Type Welded Structure
- Axial Mounting in all Edges
- 'U' Standards Dimensioning

## Front Door

- Framed Tempered Glass Door
- Single Sided & Single Point Lock
- Door Opening Direction can be Changed
- Concealed Hinges (Exterior Hinges Possible on Request)
- Opening 180° (for Standalone Cabinets)
- Opening 135° (for Side-by-Side Cabinets)

## Rear Door

- Solid Structure
- Single Sided & Single Point Lock
- Door Opening Direction can be Changed
- Concealed Hinges (Exterior Hinges Possible on Request)
- Opening 180° (for Standalone Cabinets)
- Opening 135° (for Side-by-Side Cabinets)


## Side Panels

- Solid Structure
- Pin Jointed and Single Point Locking
- With Handle

## Grounding

- All Main Metal Parts with M6x10mm or M6x15mm Copper Coated Ground Studs
- Grounding with Cable Set on Doors



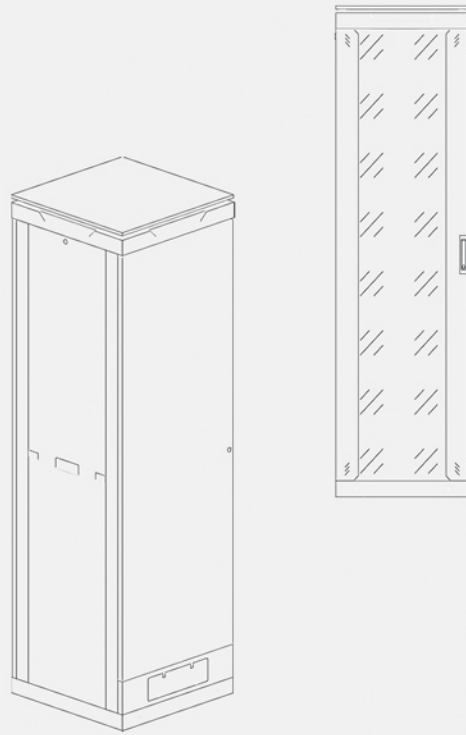

**GURKAN**  
UNIFLAT™ series  
**STANDFIX™ 19"**  
**W600 Standing Type**  
**Network Cabinets**

Depth (mm)  
**600 x 600**  
Width (mm)

**Configuration**  
**(W600xD600)mm**

- 1 x Bottom Panel  
(70\*300 mm Cable Access Holes with Brush Strip)
- 1 x Top Panel  
(Air Circulation with max 4 Fan Modules)
- 4 x Edge Profiles
- 4-6 x Support Profiles for Depth
- 4 x 19" Mounting Rails
- 1 x Top Panel
- 2 x Side Panels  
(Pin Jointed and Single Point Locking Handles)
- 1 x Front Door  
(Framed Tempered Glass, Single Point Lock)
- 1 x Rear Door  
(Opening Direction can be Changed, Single Point Lock)
- 1 x Rear Cable Access Hole

47U  
44U  
42U  
36U  
32U  
26U  
22U

**Shipping Information**

Dimensions in mm

| Product Code | U | Product Description | Inner Height<br>(hi) | Mounting Depth<br>(d19) | Inner Depth<br>max. (di) | Net Weight<br>(kg) | Gross Weight<br>(kg) | Packing Dimensions<br>(Wp x Dp x Hp) |
|--------------|---|---------------------|----------------------|-------------------------|--------------------------|--------------------|----------------------|--------------------------------------|
|--------------|---|---------------------|----------------------|-------------------------|--------------------------|--------------------|----------------------|--------------------------------------|

W = 600 mm x **D=600 mm** **STANDING TYPE NETWORK CABINETS**

**STANDFIX™ 19"**

|               |     |                                     |      |     |     |  |      |      |                  |
|---------------|-----|-------------------------------------|------|-----|-----|--|------|------|------------------|
| SFX-2266-1-2M | 22U | 22U 19"<br>(W600 X D600 X H1140) mm | 991  | 370 | 540 |  | 52,0 | 58,5 | 625 x 670 x 1295 |
| SFX-2666-1-2M | 26U | 26U 19"<br>(W600 X D600 X H1317) mm | 1169 | 370 | 540 |  | 57,0 | 64,0 | 625 x 670 x 1475 |
| SFX-3266-1-2M | 32U | 32U 19"<br>(W600 X D600 X H1584) mm | 1436 | 370 | 540 |  | 65,5 | 73,0 | 625 x 670 x 1740 |
| SFX-3666-1-2M | 36U | 36U 19"<br>(W600 X D600 X H1761) mm | 1613 | 370 | 540 |  | 71,5 | 79,5 | 625 x 670 x 1915 |
| SFX-4266-1-2M | 42U | 42U 19"<br>(W600 X D600 X H2028) mm | 1880 | 370 | 540 |  | 80,0 | 89,0 | 625 x 670 x 2185 |
| SFX-4466-1-2M | 44U | 44U 19"<br>(W600 X D600 X H2117) mm | 1969 | 370 | 540 |  | 83,0 | 92,5 | 625 x 670 x 2275 |
| SFX-4766-1-2M | 47U | 47U 19"<br>(W600 X D600 X H2250) mm | 2102 | 370 | 540 |  | 88,0 | 97,5 | 625 x 670 x 2405 |

**accessories**

|                                                               | Page |
|---------------------------------------------------------------|------|
| - Air Circulation Modules ( Roof Type or 19" Type )           | 91   |
| - Horizontal Cable Organizers ( 19" Type )                    | 98   |
| - Fixed and Sliding Shelves                                   | 84   |
| - Horizontal and Vertical Energy Distribution Modules ( PDU ) | 94   |
| - Grounding Cable Sets                                        | 97   |
| - Castors and Levelling Feets                                 | 96   |
| - Brush Strip Sets for Cable Access Holes                     | 104  |
| - Floor Anchoring Kits                                        | 105  |
| - Plinths                                                     | 106  |


**Dimensions**

Width (mm) Depth (mm)

**U**

**600 x 600**

47U  
44U  
42U  
36U  
32U  
26U  
22U

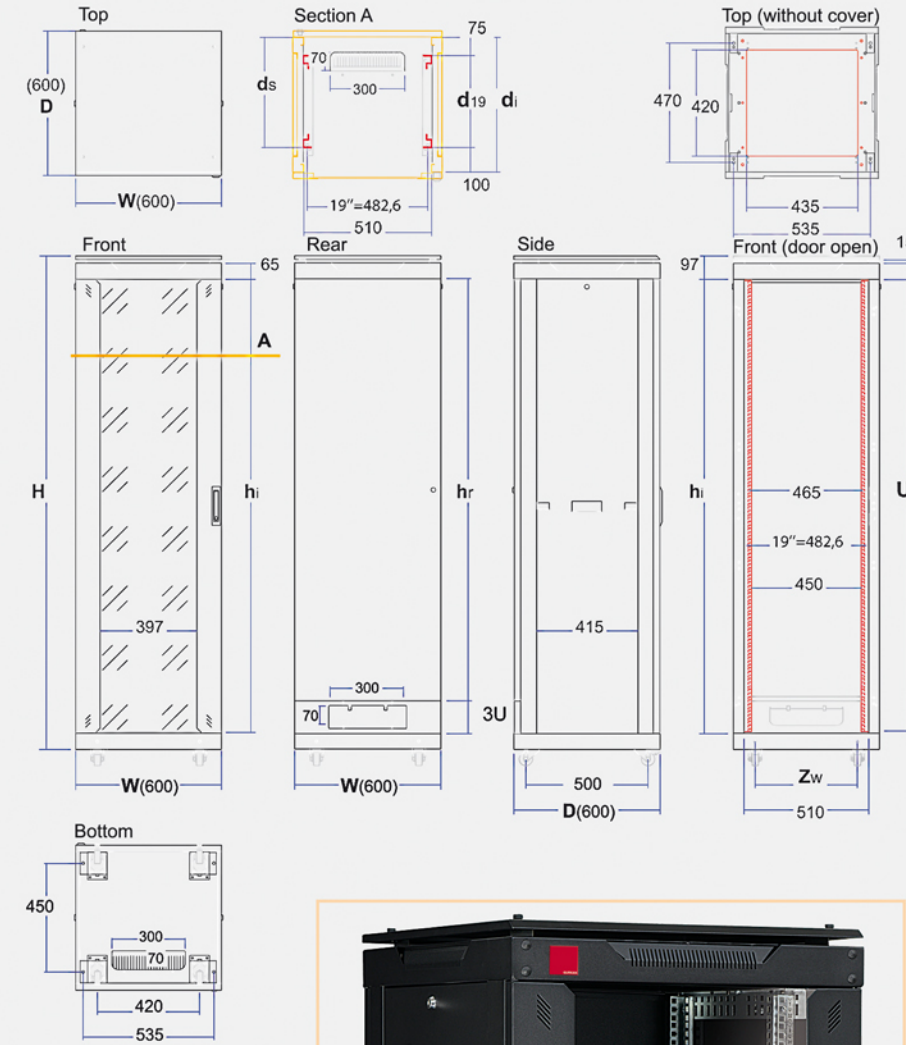

**GURKAN**  
UNIFLAT™ series  
**STANDFIX™ 19"**  
**W600 Standing Type**  
**Network Cabinets**

U = "U" Dimension ( 1U=44,45mm )  
H = External Height  
W = External Width  
D = External Depth  
hi = Inner Height  
di = Inner Depth (max.)  
d19 = Rack Mounting Depth  
ds = Usable Depth (max.)  
Zw = Mounting Width of the Floor

W = 600 mm x **D=600 mm**

| U   | W<br>(mm) | D<br>(mm) | H<br>(mm) | hi<br>(mm) | hr<br>(mm) | d19<br>(mm) | di<br>(mm) | ds<br>(mm) | Zw<br>(mm) |
|-----|-----------|-----------|-----------|------------|------------|-------------|------------|------------|------------|
| 22U | 600       | 600       | 1140      | 991,0      | 19U        | 370,0       | 540,0      | 445,0      | 420,0      |
| 26U |           |           | 1317      | 1169,0     | 23U        |             |            |            |            |
| 32U |           |           | 1584      | 1436,0     | 29U        |             |            |            |            |
| 36U |           |           | 1761      | 1613,0     | 33U        |             |            |            |            |
| 42U |           |           | 2028      | 1880,0     | 39U        |             |            |            |            |
| 44U |           |           | 2117      | 1969,0     | 41U        |             |            |            |            |
| 47U |           |           | 2250      | 2102,0     | 44U        |             |            |            |            |

1U = 44,45 mm

Dimensions in mm





**GURKAN**  
UNIFLAT™ series  
**STANDFIX™ 19"**  
W600 Standing Type  
Network Cabinets

Depth (mm)  
**600 x 800**  
Width (mm)

**Configurations**  
(W600xD800)mm

- 1 x Bottom Panel  
(70\*300 mm Cable Access Holes with Brush Strip )
- 1 x Top Panel  
(Air Circulation with max 4 Fan Modules)
- 4 x Edge Profiles
- 4-6 x Support Profiles for Depth
- 4 x 19" Mounting Rails
- 1 x Top Panel  
(with Cable Access Hole)
- 2 x Side Panels  
(Pin Jointed and Single Point Locking Handles )
- 1 x Front Door,  
(Framed Tempered Glass, Single Point Lock)
- 1 x Rear Door  
( Opening Direction can be Changed, Single Point Lock)
- 1 x Rear Cable Access Hole

47U  
44U  
42U  
36U  
32U  
26U  
22U

Shipping Information



| Product Code | U | Product Description | Inner Height<br>(hi) | Mounting Depth<br>(d19) | Inner Depth<br>max. (di) | Net Weight<br>(kg) | Gross Weight<br>(kg) | Packing Dimensions<br>( Wp x Dp x Hp ) |
|--------------|---|---------------------|----------------------|-------------------------|--------------------------|--------------------|----------------------|----------------------------------------|
|--------------|---|---------------------|----------------------|-------------------------|--------------------------|--------------------|----------------------|----------------------------------------|

W = 600 mm x **D=800 mm** **STANDING TYPE NETWORK CABINETS**

**STANDFIX™ 19"**

|               |     |                                     |      |     |     |      |       |                  |
|---------------|-----|-------------------------------------|------|-----|-----|------|-------|------------------|
| SFX-2268-1-2M | 22U | 22U 19"<br>(W600 X D780 X H1140) mm | 991  | 545 | 745 | 58,0 | 65,0  | 625 x 870 x 1295 |
| SFX-2668-1-2M | 26U | 26U 19"<br>(W600 X D780 X H1317) mm | 1169 | 545 | 745 | 65,5 | 73,0  | 625 x 870 x 1475 |
| SFX-3268-1-2M | 32U | 32U 19"<br>(W600 X D780 X H1584) mm | 1436 | 545 | 745 | 76,0 | 84,0  | 625 x 870 x 1740 |
| SFX-3668-1-2M | 36U | 36U 19"<br>(W600 X D780 X H1761) mm | 1613 | 545 | 745 | 82,5 | 91,0  | 625 x 870 x 1915 |
| SFX-4268-1-2M | 42U | 42U 19"<br>(W600 X D780 X H2028) mm | 1880 | 545 | 745 | 90,5 | 100,0 | 625 x 870 x 2185 |
| SFX-4468-1-2M | 44U | 44U 19"<br>(W600 X D780 X H2117) mm | 1969 | 545 | 745 | 94,0 | 104,0 | 625 x 870 x 2275 |
| SFX-4768-1-2M | 47U | 47U 19"<br>(W600 X D780 X H2250) mm | 2102 | 545 | 745 | 99,0 | 109,5 | 625 x 870 x 2405 |

accessorios

|                                                              |     |
|--------------------------------------------------------------|-----|
| - Air Circulation Modules ( Roof Type or 19" Type )          | 91  |
| - Horizontal Cable Organizers ( 19" Type )                   | 98  |
| - Fixed and Sliding Shelves                                  | 84  |
| - Horizontal and Vertical Energy Distribution Modules ( PDU) | 94  |
| - Grounding Cable Sets                                       | 97  |
| - Castors and Levelling Feets                                | 96  |
| - Brush Strip Sets for Cable Access Holes                    | 104 |
| - Floor Anchoring Kits                                       | 105 |
| - Plinths                                                    | 106 |

Page


Dimensions

Width (mm) Depth (mm)

U

**600 x 800**

47U  
44U  
42U  
36U  
32U  
26U  
22U

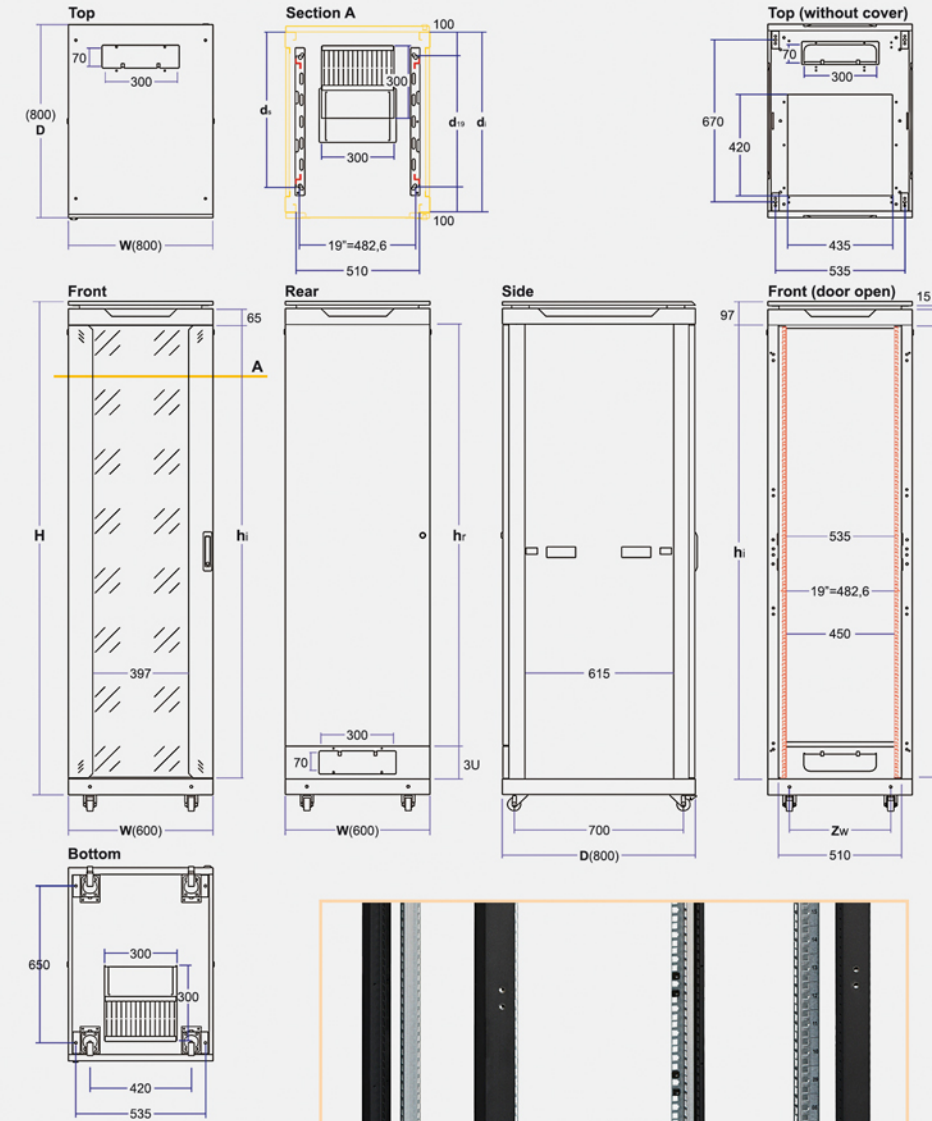

**GURKAN**  
UNIFLAT™ series  
**STANDFIX™ 19"**  
W600 Standing Type  
Network Cabinets

U = "U" Dimension ( 1U=44,45mm )  
H = External Height  
W = External Width  
D = External Depth  
hi = Inner Height  
di = Inner Depth (max.)  
d19 = Rack Mounting Depth  
ds = Usable Depth (max.)  
Zw = Mounting Width of the Floor


W = 600 mm x **D=800 mm**

| U   | W<br>(mm) | D<br>(mm) | H<br>(mm) | hi<br>(mm) | hr<br>(mm) | d19<br>(mm) | di<br>(mm) | ds<br>(mm) | Zw<br>(mm) |
|-----|-----------|-----------|-----------|------------|------------|-------------|------------|------------|------------|
| 22U | 600       | 780       | 1140      | 991,0      | 19U        | 545,0       | 745,0      | 645,0      | 420,0      |
| 26U |           |           | 1317      | 1169,0     | 23U        |             |            |            |            |
| 32U |           |           | 1584      | 1436,0     | 29U        |             |            |            |            |
| 36U |           |           | 1761      | 1613,0     | 33U        |             |            |            |            |
| 42U |           |           | 2028      | 1880,0     | 39U        |             |            |            |            |
| 44U |           |           | 2117      | 1969,0     | 41U        |             |            |            |            |
| 47U |           |           | 2250      | 2102,0     | 44U        |             |            |            |            |

1U = 44,45 mm

Dimensions in mm



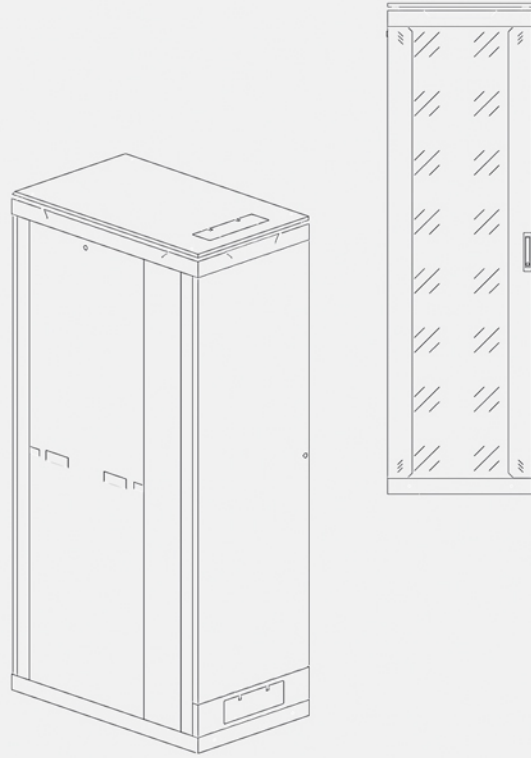

**GURKAN**  
UNIFLAT™ series  
**STANDFIX™ 19"**  
W600 Standing Type  
Network Cabinets

Depth (mm)  
**600 x 1000**  
Width (mm)

47U  
42U  
36U  
26U

**Configurations  
(W600xD1000)mm**

- 1 x Bottom Panel  
(70\*300 mm Cable Access Holes with Brush Strip)
- 1 x Top Panel  
(Air Circulation with max 6 Fan Modules)
- 4 x Edge Profiles
- 6 x Support Profiles for Depth  
(26U and 36U are excluded cabinet)
- 4 x 19" Mounting Rails
- 1 x Top Panel  
(with Cable Access Hole)
- 2 x Side Panels  
(Pin Jointed and Single Point Locking Handles)
- 1 x Front Door  
(Framed Tempered Glass, Single Point Lock)
- 1 x Rear Door  
(Opening Direction can be Changed, Single Point Lock)
- 1 x Rear Cable Access Hole

**Shipping Information**

Dimensions in mm

| Product Code  | U   | Product Description                  | Inner Height<br>(hi) | Mounting Depth<br>(d19) | Inner Depth<br>max. (di) | Net Weight<br>(kg) | Gross Weight<br>(kg) | Packing Dimensions<br>(Wp x Dp x Hp) |
|---------------|-----|--------------------------------------|----------------------|-------------------------|--------------------------|--------------------|----------------------|--------------------------------------|
| SFX-2661-1-2M | 26U | 26U 19"<br>(W600 X D1000 X H1317) mm | 1169                 | 545                     | 745                      | 79,0               | 87,0                 | 625 x 1070 x 1475                    |
| SFX-3661-1-2M | 36U | 36U 19"<br>(W600 X D1000 X H1761) mm | 1613                 | 545                     | 745                      | 96,5               | 107,0                | 625 x 1070 x 1915                    |
| SFX-4261-1-2M | 42U | 42U 19"<br>(W600 X D1000 X H2028) mm | 1880                 | 545                     | 745                      | 107,0              | 119,0                | 625 x 1070 x 2185                    |
| SFX-4761-1-2M | 47U | 47U 19"<br>(W600 X D1000 X H2250) mm | 2102                 | 545                     | 745                      | 128,0              | 142,0                | 625 x 1070 x 2405                    |

**accessories**

| accessories                                                   | Page |
|---------------------------------------------------------------|------|
| - Air Circulation Modules ( Roof Type or 19" Type )           | 91   |
| - Horizontal Cable Organizers ( 19" Type )                    | 98   |
| - Fixed and Sliding Shelves                                   | 84   |
| - Horizontal and Vertical Energy Distribution Modules ( PDU ) | 94   |
| - Grounding Cable Sets                                        | 97   |
| - Castors and Levelling Feets                                 | 96   |
| - Brush Strip Sets for Cable Access Holes                     | 104  |
| - Floor Anchoring Kits                                        | 105  |
| - Plinths                                                     | 106  |


**Dimensions**

Width (mm) Depth (mm)

U

**600 x 1000**

47U  
42U  
36U  
26U

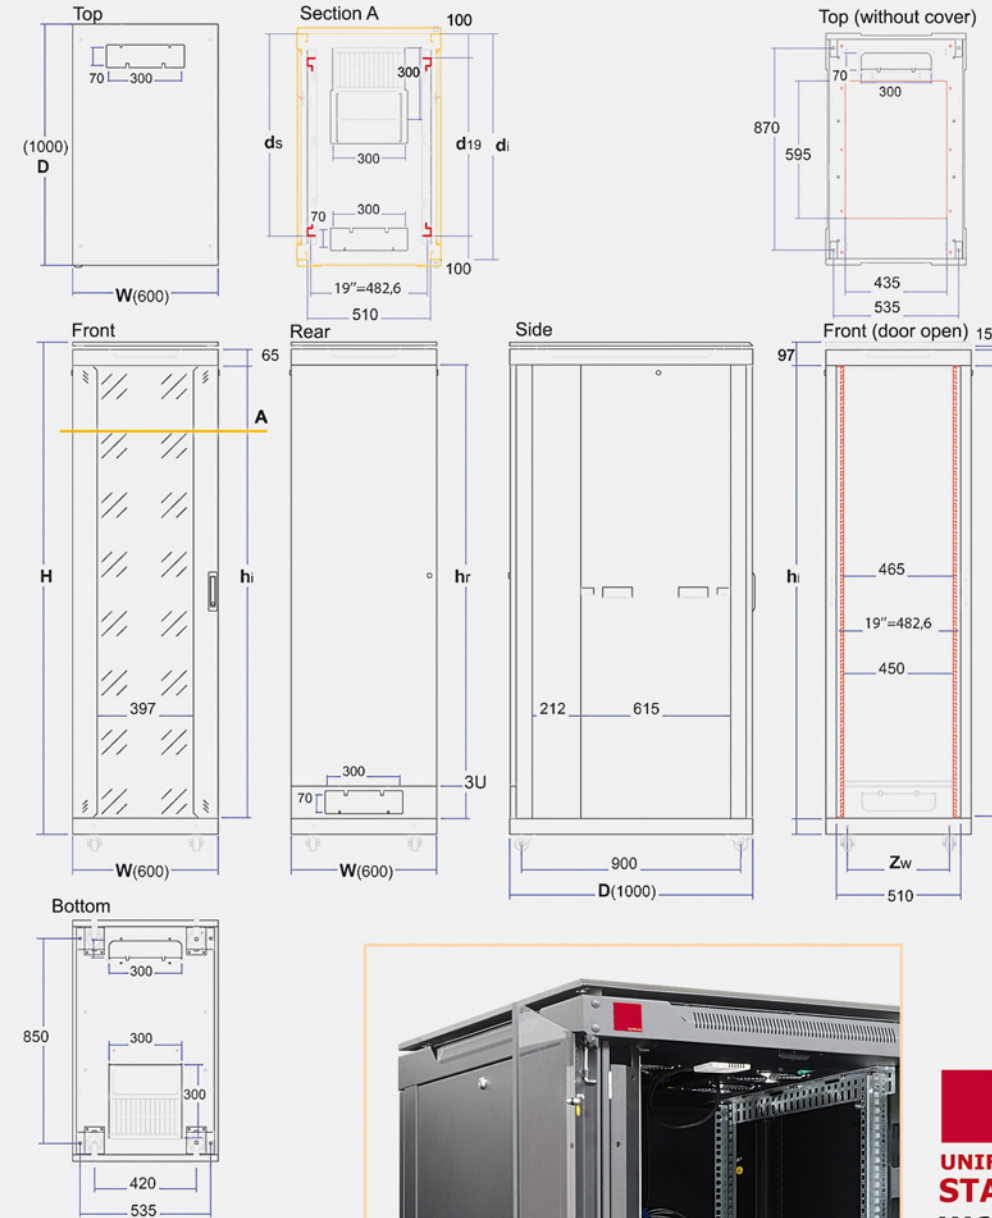

**GURKAN**  
UNIFLAT™ series  
**STANDFIX™ 19"**  
W600 Standing Type  
Network Cabinets

U = "U" Dimension ( 1U=44,45mm )  
H = External Height  
W = External Width  
D = External Depth  
hi = Inner Height  
di = Inner Depth (max.)  
d19 = Rack Mounting Depth  
ds = Usable Depth (max.)  
Zw = Mounting Width of the Floor

W = 600 mm x D = 1000 mm


| U   | W<br>(mm) | D<br>(mm) | H<br>(mm) | hi<br>(mm) | hr<br>(mm) | d19<br>(mm) | di<br>(mm) | ds<br>(mm) | Zw<br>(mm) |
|-----|-----------|-----------|-----------|------------|------------|-------------|------------|------------|------------|
| 26U | 600       | 1000      | 1317      | 1169,0     | 23U        | 745,0       | 945,0      | 845,0      | 420,0      |
| 36U |           |           | 1761      | 1613,0     | 33U        |             |            |            |            |
| 42U |           |           | 2028      | 1880,0     | 39U        |             |            |            |            |
| 47U |           |           | 2250      | 2102,0     | 44U        |             |            |            |            |

1U = 44,45 mm

Dimensions in mm



Depth (mm)  
**600 x 600**  
Width (mm)

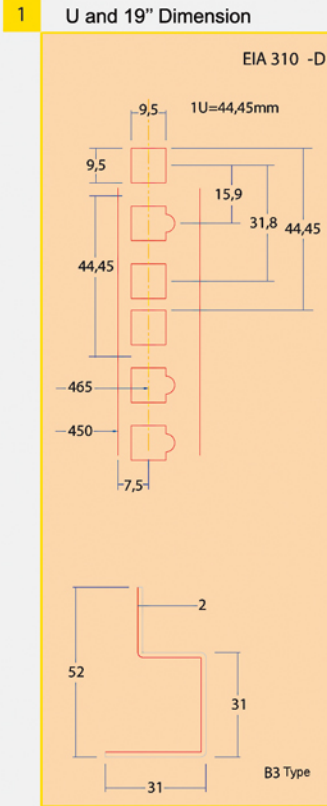

**GURKAN**  
**UNIFLAT™ series**  
**STANDFIX™ 19"**  
**W600 Standing Type**  
**Network Cabinets**

**Side Panels;**

- Solid Structure
- Pin Jointed and Single Point Locking
- Handles and Clips

**Edge Profiles;**

- Closed Type Welded Structure
- Axial Mounting in all Edges
- 'U' Standards Dimensioning and Inner Segmentation

**Front Door;**

- Framed Tempered Glass Door
- Single Sided & Single Point Lock
- Door Opening Direction can be Changed
- Concealed Hinges (Exterior Hinges Possible on Request)
- Opening 180° (for Standalone Cabinets) , Opening 135° (for Side-by-Side Cabinets)

**Top Cover**

- Monoblock and Welded
- Adjustable Air Gap between Top Panel
- Cable Access Holes (Sliding Lid or with Brush Strip Strips)
- Ready for Assembly with Connection Kit
- Ceiling Mount Option with Fixing Kit

**GURKAN**

**UNIFLAT™ series**  
**STANDFIX™ 19"**  
**W600 Standing Type**  
**Network Cabinets**

**Top Panel**

- Monoblock and Welded
- Ventilated
- Air Circulation with max 4 Fan Modules)

**19" Mounting Rails**

- 19" Assembly and Applications according to DIN 340-D and TS EN 60297-1
- "U" Markings on 19" Mounting Rails
- Mobile 19" Mounting Profiles (Back and Forth)

**Rear Door**


- Solid Structure
- Single Sided & Single Point Lock
- Door Opening Direction can be Changed
- Concealed Hinges (Exterior Hinges Possible on Request)
- Optional Cable Access Holes - 70x300 mm (with Brush Strip on Request)
- Opening 180° (for Standalone Cabinets)
- Opening 135° (for Side-by-Side Cabinets)

**Support Profiles**

- Galvanized Sheet Metal
- Special Multi-Fold Structure

**Bottom Panel**

- Monoblock and Welded
- Ready for Assembly with Connection Kit
- Cable Access Holes - 300x300mm (at rear)
- Optional Levelling Feet or Castors
- Lifting Plinth can be Installed

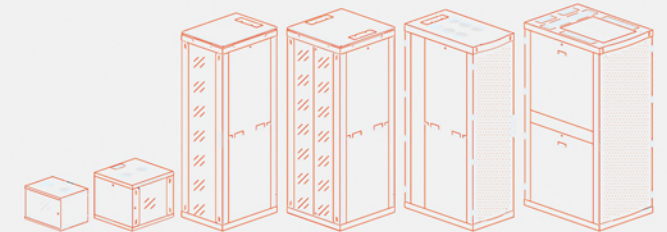




**GURKAN**


UNIFLAT™ series  
**STANDFIX™ 19"**  
 W600 Standing Type  
 Network Cabinets

**W600 x D600****W600 x D800****W600 x D1000****Top Panel Details**


Dimensions in mm

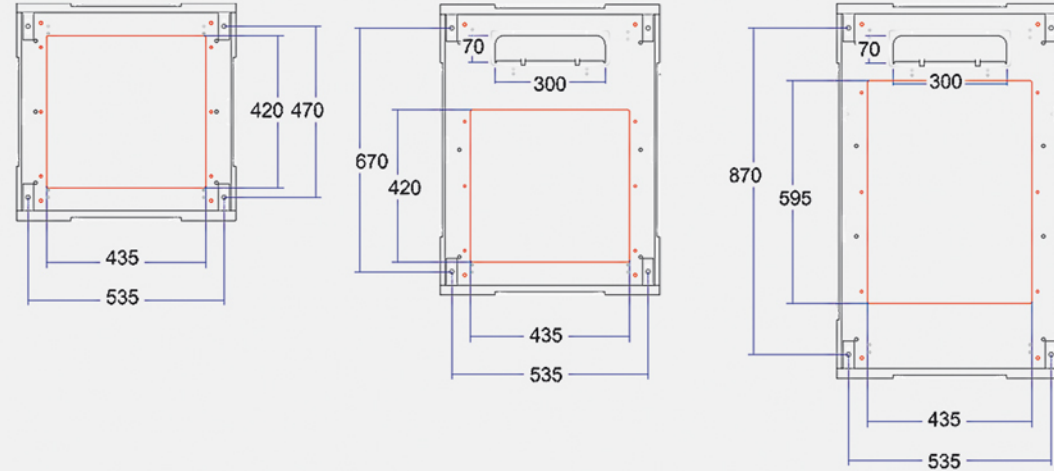**Section-A Details**

Dimensions in mm

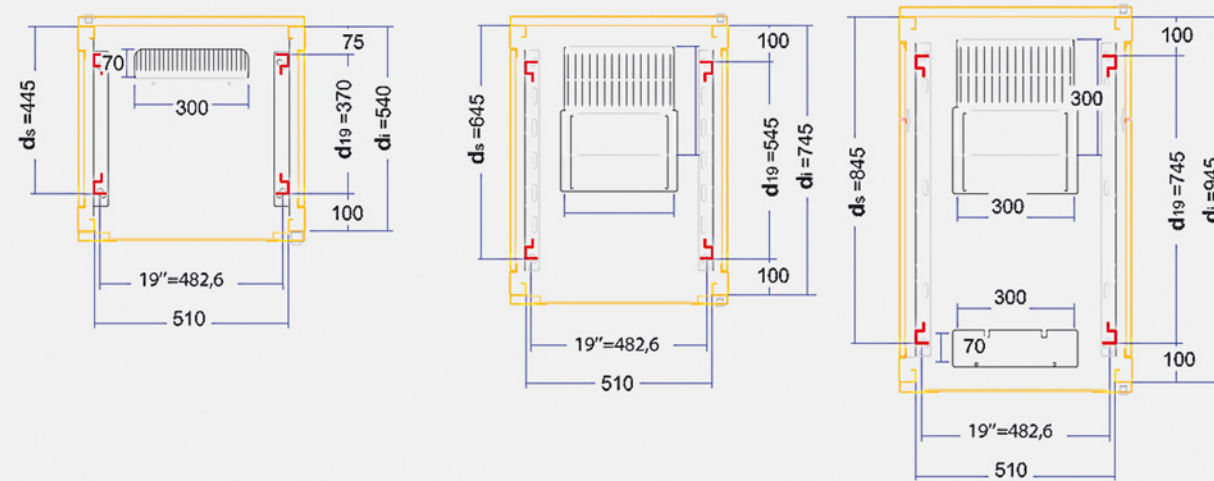**Bottom Panel Details**


Dimensions in mm

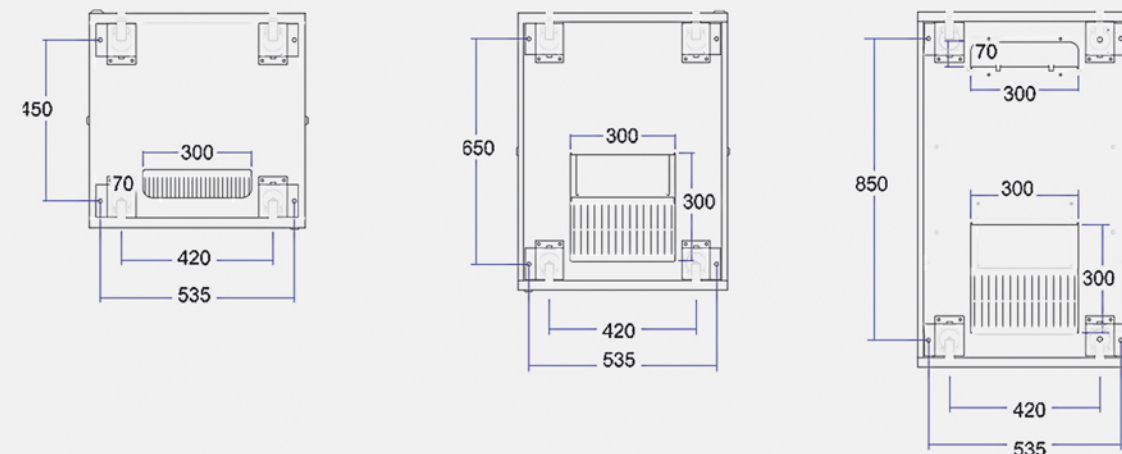

cabinet@gurkan.com.tr





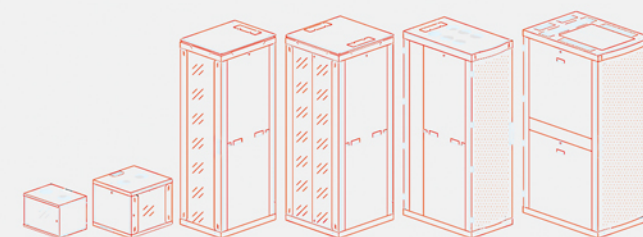

**GURKAN**

**UNIFLAT™ series**

**NETWORK CABINETS**

**STANDFIX™ 19"**

**STANDING TYPE**

**W780**



**STANDFIX™ 19"**

Standing Type Network Cabinets W780

U-height

**47U 42U 36U 26U**

**W780**


width (mm)

depth (mm)

**D600**  
**D800**

[cabinet@gurkan.com.tr](mailto:cabinet@gurkan.com.tr)



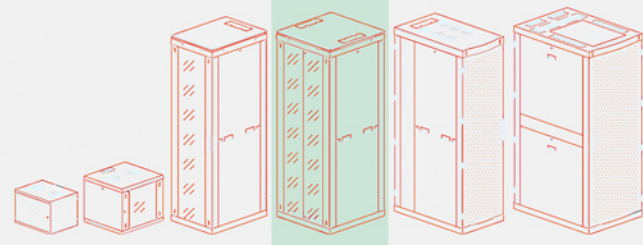

GURKAN

UNIFLAT™ series

STANDFIX™ 19" STANDING TYPE NETWORK CABINETS W780

## TECHNICAL SPECIFICATIONS

### Materials

- Steel Sheet Metal; DIN EN 10130
- Galvanized Sheet Metal; DIN EN 10327
- All Metal Parts (Except Support Profiles) are Phosphated & Powder Paint Coated
- All Support Profiles and 19" Mounting Rails are Manufactured from Galvanized Sheet Metal
- All production materials are in accordance with RoHS Standards

### Dimensions

- 1U=44,45mm
- 19" = 482,6mm
- Width ( W )
- W=600mm ( 23,6 inch )

- Depth(s) ( D )
- D=600mm ( 23,6 inch )
- D=780mm ( 30,7 inch )

- Inner Height(s) ( 1U=44,45mm )
- 32U, 36U, 42U, 44U, 47U

### Quality Certificates

- ISO 9001 - Quality Management System
- ISO 14001 - Environmental Management System
- ISO 10002 - Customer Satisfaction Management System
- OHSAS 18001 - Occupational Health and Safety Management System
- ISO 27001 - Information Security Management System

### Product Certificate and Compliances

- EN 61587-1, Mechanical Structures Certificate for Electronic Equipment
- Protection Class IP20 according to EN 60529-1
- Mounting Applications according to EN 60917-2-1/-2
- Information Technology Device Safety Compliance according to EN 60950-1 and IEC 60364-7-707
- Surface Finishing and Powder Coating Applications according to DIN 67530 and ASTM D 2796

### Protection Class

- Protection Class IP20



### 19 " Assemblies

- 1U=1HU=44,45mm
- 19" = 482,6mm
- 19" Assembly and Applications according to DIN 340-D and EN 60297-1
- "U" Markings on 19" Mounting Rails
- Mobile 19' Mounting Profiles (Back and Forth)

### Colors

- Standard, Ral 9005 Black (Textured)
- Optional, Ral 7035 Grey (Textured)

### Shipping Type

- Delivered in Monoblock or Flatpack (Easy Assembly)

Depth (mm)

780 x 600

780 x 800

Width (mm)


47U

42U

36U

26U

GURKAN

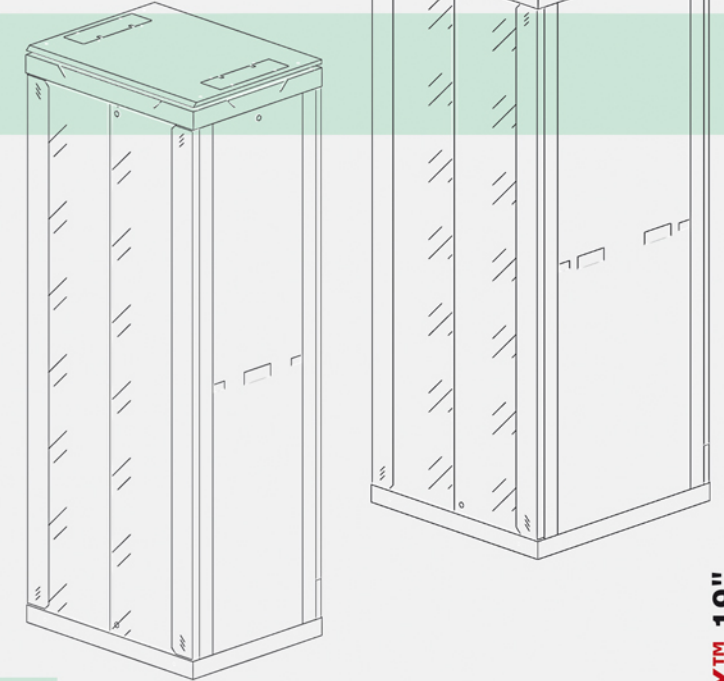UNIFLAT™ series  
SOHOFIX™ 19"Standing Type  
Network Cabinets

## Mechanical Structure and Functionalities

### General

- Ergonomic and Aesthetic Structure
- Anti-Noise Plastic Buffers
- All Parts are Replaceable
- Side-by-Side Mounting and Inner Segmentation
- Available for Cable Organization in all Directions inside the Cabinet
- Air Circulation, max. 1000m3/h
- Max Load Capacity – 1.250 kg (Stationary)
- Max Load Capacity – 1.000 kg (Mobile)
- 4 Lifting Points on Top

### Top Panel

- Monoblock and Welded
- Perforation for Air Circulation
- Ready to Install max 4 Fan Modules

### Bottom Panel

- Monoblock and Welded
- Ready for Assembly with Connection Kit
- Cable Access Holes (fixed 2x70x300mm for side, 300x300mm for rear)
- Optional Levelling Feet or Castors
- Lifting Plinth can be Installed

### Top Cover

- Monoblock and Welded
- Adjustable Air Gap between Top Panel
- Cable Access Holes (Sliding Lid or with Brush Strip Strips)
- Ready for Assembly with Connection Kit
- Ceiling Mount Option with Fixing Kit

### Edge Profiles

- Closed Type Welded Structure
- Axial Mounting in all Edges
- 'U' Standards Dimensioning and Inner Segmentation

### Front Door

- Framed Tempered Glass Door
- Double Sided & Single Point Lock
- Concealed Hinges (Exterior Hinges Possible on Request)
- Opening 180° (for Standalone Cabinets)
- Opening 135° (for Side-by-Side Cabinets)

### Rear Door

- Solid Structure
- Double Sided & Multi Point Lock
- Concealed Hinges (Exterior Hinges Possible on Request)
- Optional Cable Access Holes - 70x300 mm (with Brush Strip on Request)
- Opening 180° (for Standalone Cabinets)
- Opening 135° (for Side-by-Side Cabinets)

### Side Panels

- Solid Structure
- Pin Jointed and Single Point Locking
- Handles and Clips

### Grounding

- All Main Metal Parts with M6x10mm or M6x15mm Copper Coated Ground Studs
- Grounding with Cable Set on Doors





**GURKAN**  
UNIFLAT™ series  
**STANDFIX™ 19"**  
**W780 Standing Type**  
**Network Cabinets**

Depth (mm)  
**780 x 600**  
Width (mm)

47U  
42U  
36U  
26U

**Configurations**  
**(W780xD600)mm**

- 1 x Bottom Panel  
70x300 Cable Access Holes (right and left sides without Brush Strip )  
and 300x300 Cable Access Holes (at the rear with Brush Strip )
- 1 x Top Panel  
70x300 Cable Access Holes (right and left sides without Brush Strip )  
and Air Circulation with max 4 Fan Modules
- 4 x Edge Profiles
- 4 x Support Profiles for Depth
- 4 x 19" Mounting Rails
- 1 x Top Panel  
70x300 Cable Access Holes (right and left sides without Brush Strip )
- 2 x Side Panels
- 1 x Front Door  
Swing, Framed Tempered Glass Door  
(Single Point Lock)
- 1 x Rear Door  
(Swing, Framed Tempered Glass Door  
(Multi Point Lock)
- 1 x Rear Cable Access Hole

**Shipping Information**

Dimensions in mm

| Product Code | U | Product Description | Inner Height<br>(hi) | Mounting Depth<br>(d19) | Inner Depth<br>max. (di) | Net Weight<br>(kg) | Gross Weight<br>(kg) | Packing Dimensions<br>( Wp x Dp x Hp ) |
|--------------|---|---------------------|----------------------|-------------------------|--------------------------|--------------------|----------------------|----------------------------------------|
|--------------|---|---------------------|----------------------|-------------------------|--------------------------|--------------------|----------------------|----------------------------------------|

W = 780 mm x **D = 600 mm** **STANDING TYPE NETWORK CABINETS**

**STANDFIX™ 19"**

|               |            |                                            |      |  |  |       |       |                  |
|---------------|------------|--------------------------------------------|------|--|--|-------|-------|------------------|
| SFX-2686-1-2M | <b>26U</b> | 26U 19"<br>(W780 X <b>D600</b> X H1317) mm | 1169 |  |  | 67,5  | 73,0  | 820 x 670 x 1475 |
| SFX-3686-1-2M | <b>36U</b> | 36U 19"<br>(W780 X <b>D600</b> X H1761) mm | 1613 |  |  | 84,5  | 91,0  | 820 x 670 x 1915 |
| SFX-4286-1-2M | <b>42U</b> | 42U 19"<br>(W780 X <b>D600</b> X H2028) mm | 1880 |  |  | 92,5  | 100,0 | 820 x 670 x 2185 |
| SFX-4786-1-2M | <b>47U</b> | 47U 19"<br>(W780 X <b>D600</b> X H2250) mm | 2102 |  |  | 101,0 | 109,5 | 820 x 670 x 2405 |

**accessories**

| accessories                                                  | Page |
|--------------------------------------------------------------|------|
| - Air Circulation Modules ( Roof Type or 19" Type )          | 91   |
| - Horizontal Cable Organizers ( 19" Type )                   | 98   |
| - Fixed and Sliding Shelves                                  | 84   |
| - Horizontal and Vertical Energy Distribution Modules ( PDU) | 94   |
| - Grounding Cable Sets                                       | 97   |
| - Castors and Levelling Feets                                | 96   |
| - Brush Strip Sets for Cable Access Holes                    | 104  |
| - Floor Anchoring Kits                                       | 105  |
| - Plinths                                                    | 106  |


**Dimensions**

Width (mm) Depth (mm)

**U**

**780 x 600**

47U  
42U  
36U  
26U

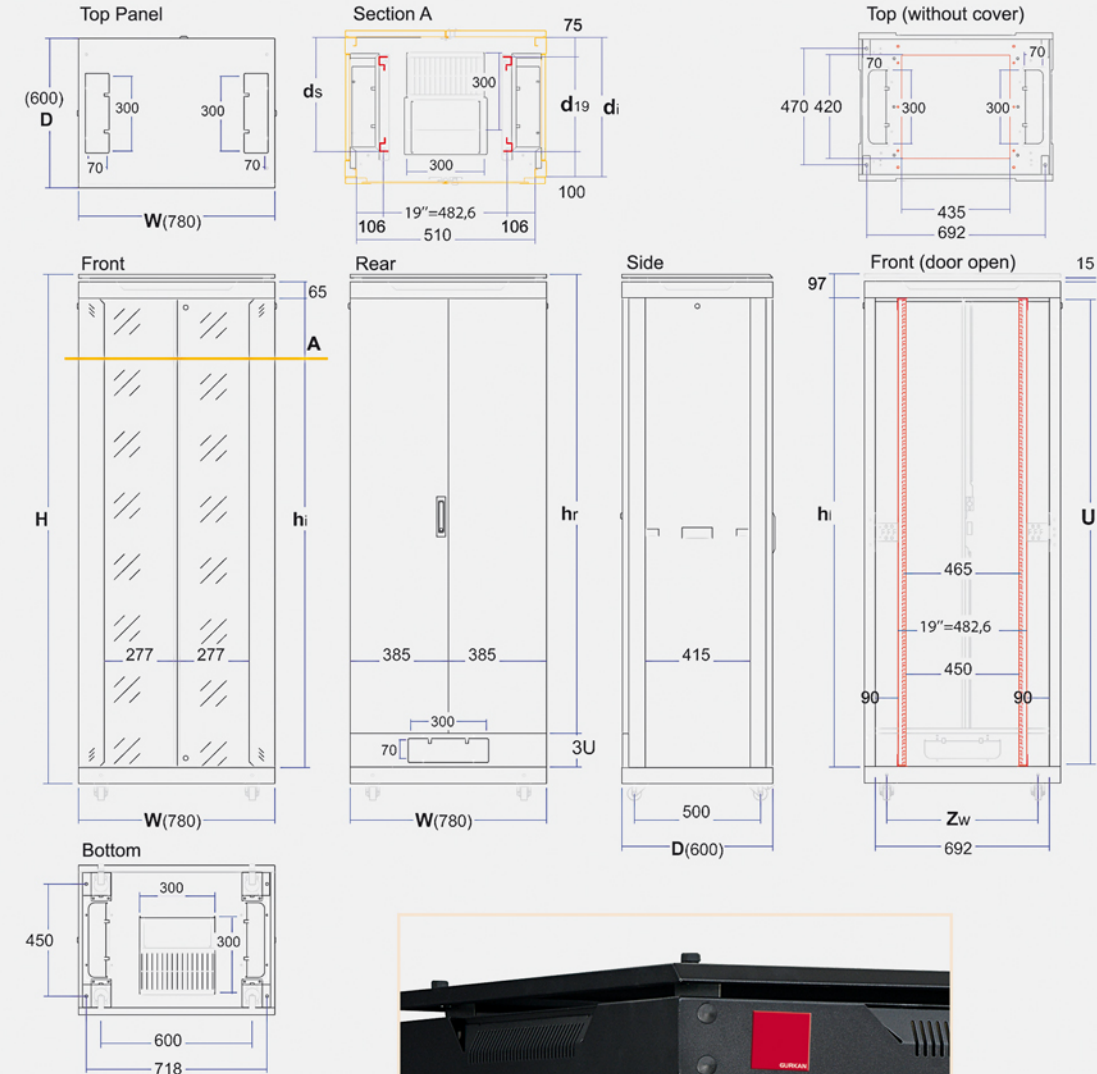

**GURKAN**

UNIFLAT™ series  
**STANDFIX™ 19"**  
**W780 Standing Type**  
**Network Cabinets**

U = "U" Dimension ( 1U=44,45mm )  
H = External Height  
W = External Width  
D = External Depth  
hi = Inner Height  
di = Inner Depth (max.)  
d19 = Rack Mounting Depth  
ds = Usable Depth (max.)  
Zw = Mounting Width of the Floor


W = 780 mm x **D = 600 mm**

| U   | W<br>(mm) | D<br>(mm) | H<br>(mm) | hi<br>(mm) | hr<br>(mm) | d19<br>(mm) | di<br>(mm) | ds<br>(mm) | Zw<br>(mm) |
|-----|-----------|-----------|-----------|------------|------------|-------------|------------|------------|------------|
| 26U | 780       | 600       | 1317      | 1169,0     | 23U        | 370,0       | 545,0      | 445,0      | 600,0      |
| 36U |           |           | 1761      | 1613,0     | 33U        |             |            |            |            |
| 42U |           |           | 2028      | 1880,0     | 39U        |             |            |            |            |
| 47U |           |           | 2250      | 2102,0     | 44U        |             |            |            |            |

1U = 44,45 mm

Dimensions in mm



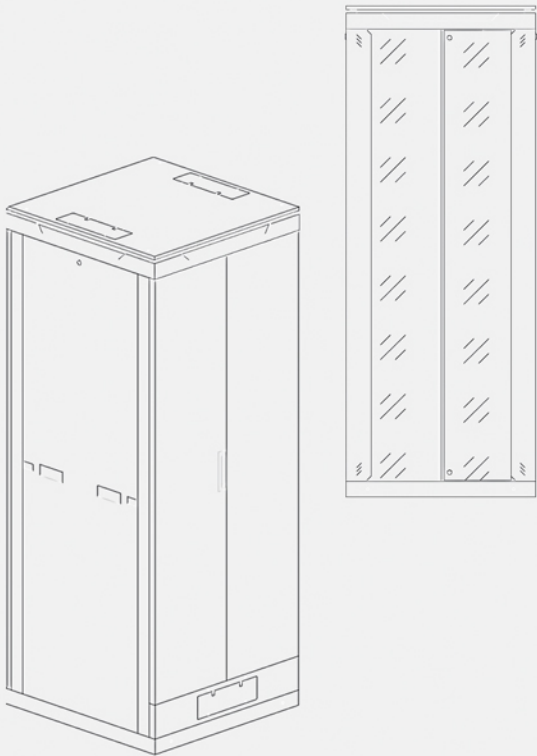

GURKAN

UNIFLAT™ series

STANDFIX™ 19"

W780 Standing Type

Network Cabinets

Depth (mm)

780 x 800

Width (mm)

47U

42U

36U

26U

Configurations (W780xD800)mm

- 1 x Bottom Panel  
70x300 Cable Access Holes (right and left sides without Brush Strip ) and 300x300 Cable Access Holes (at the rear with Brush Strip )
- 1 x Top Panel  
70x300 Cable Access Holes (right and left sides without Brush Strip ) and Air Circulation with max 4 Fan Modules
- 4 x Edge Profiles
- 4 x Support Profiles for Depth
- 4 x 19" Mounting Rails
- 1 x Top Panel  
70x300 Cable Access Holes (right and left sides without Brush Strip )
- 2 x Side Panels
- 1 x Front Door  
Swing, Framed Tempered Glass Door (Single Point Lock)
- 1 x Rear Door  
(Swing, Framed Tempered Glass Door (Multi Point Lock)
- 1 x Rear Cable Access Hole


Shipping Information

| Product Code                                                         | U   | Product Description              | Inner Height (hi) | Mounting Depth (d19) | Inner Depth max. (di) | Net Weight (kg) | Gross Weight (kg) | Packing Dimensions ( Wp x Dp x Hp ) |
|----------------------------------------------------------------------|-----|----------------------------------|-------------------|----------------------|-----------------------|-----------------|-------------------|-------------------------------------|
| W = 780 mm x D = 800 mm STANDING TYPE NETWORK CABINETS STANDFIX™ 19" |     |                                  |                   |                      |                       |                 |                   |                                     |
| SFX-3286-1-2M                                                        | 32U | 32U 19" (W780 X D800 X H1584) mm | 1436              |                      |                       | 87,5            | 95,0              | 820 x 870 x 1740                    |
| SFX-3686-1-2M                                                        | 36U | 36U 19" (W780 X D800 X H1761) mm | 1613              |                      |                       | 95,0            | 104,0             | 820 x 870 x 1915                    |
| SFX-4286-1-2M                                                        | 42U | 42U 19" (W780 X D800 X H2028) mm | 1880              |                      |                       | 106,0           | 115,0             | 820 x 870 x 2185                    |
| SFX-4786-1-2M                                                        | 47U | 47U 19" (W780 X D800 X H2250) mm | 2102              |                      |                       | 117,0           | 128,0             | 820 x 870 x 2405                    |

accessories

|                                                              | Page |
|--------------------------------------------------------------|------|
| - Air Circulation Modules ( Roof Type or 19" Type )          | 91   |
| - Horizontal Cable Organizers ( 19" Type )                   | 98   |
| - Fixed and Sliding Shelves                                  | 84   |
| - Horizontal and Vertical Energy Distribution Modules ( PDU) | 94   |
| - Grounding Cable Sets                                       | 97   |
| - Castors and Levelling Feets                                | 96   |
| - Brush Strip Sets for Cable Access Holes                    | 104  |
| - Floor Anchoring Kits                                       | 105  |
| - Plinths                                                    | 106  |

Dimensions

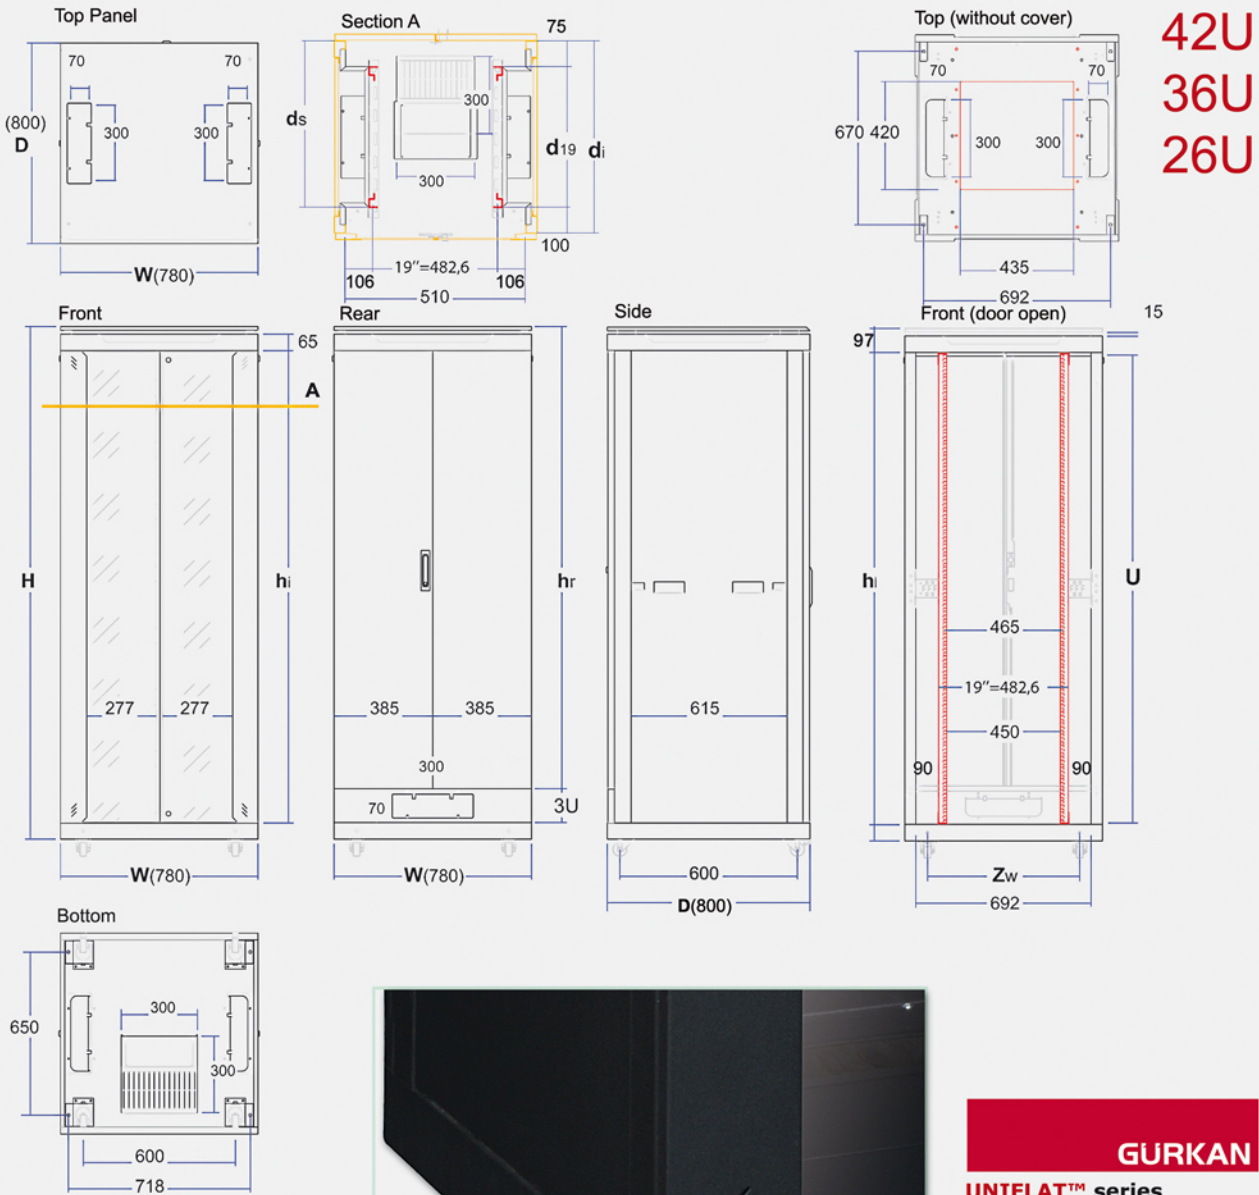

W = 780 mm x D = 800 mm

| U   | W (mm) | D (mm) | H (mm) | hi (mm) | hr (mm) | d19 (mm) | di (mm) | ds (mm) | Zw (mm) |
|-----|--------|--------|--------|---------|---------|----------|---------|---------|---------|
| 26U | 780    | 800    | 1317   | 1169,0  | 23U     | 545,0    | 745,0   | 645,0   | 600,0   |
| 36U |        |        | 1761   | 1613,0  | 33U     |          |         |         |         |
| 42U |        |        | 2028   | 1880,0  | 39U     |          |         |         |         |
| 47U |        |        | 2250   | 2102,0  | 44U     |          |         |         |         |

1U = 44,45 mm

Dimensions in mm

GURKAN

UNIFLAT™ series

STANDFIX™ 19"

W780 Standing Type

Network cabinets

- U = "U" Dimension ( 1U=44,45mm )
- H = External Height
- W = External Width
- D = External Depth
- hi = Inner Height
- di = Inner Depth (max.)
- d19 = Rack Mounting Depth
- ds = Usable Depth (max.)
- Zw = Mounting Width of the Floor



GURKAN


UNIFLAT™ series  
STANDFIX™ 19"  
W780 Standing Type  
Network Cabinets

W780 x D600

W780 x D800


Top Panel Details

Dimensions in mm

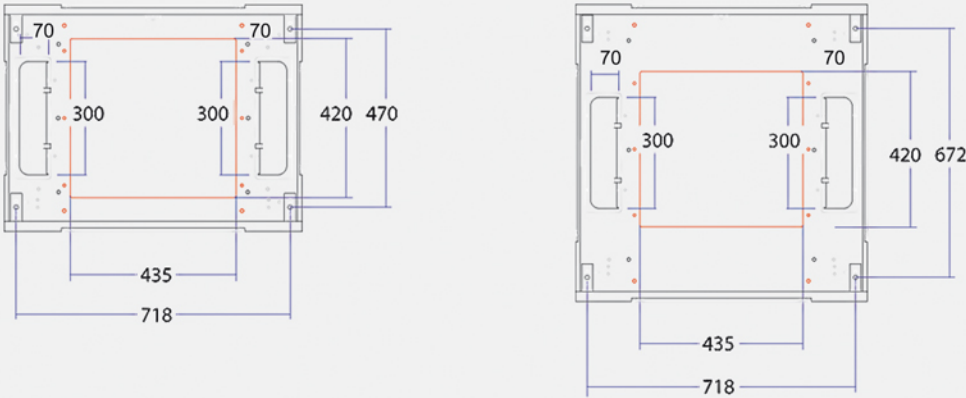


Section-A Details

Dimensions in mm

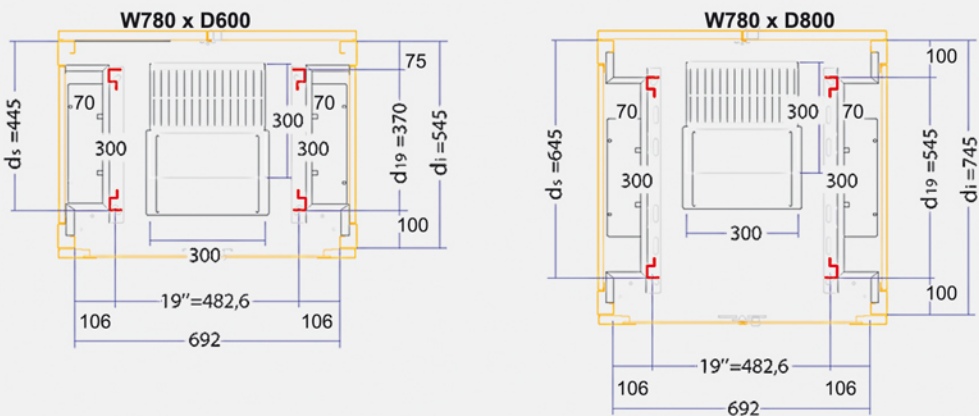


Bottom Panel Details

Dimensions in mm

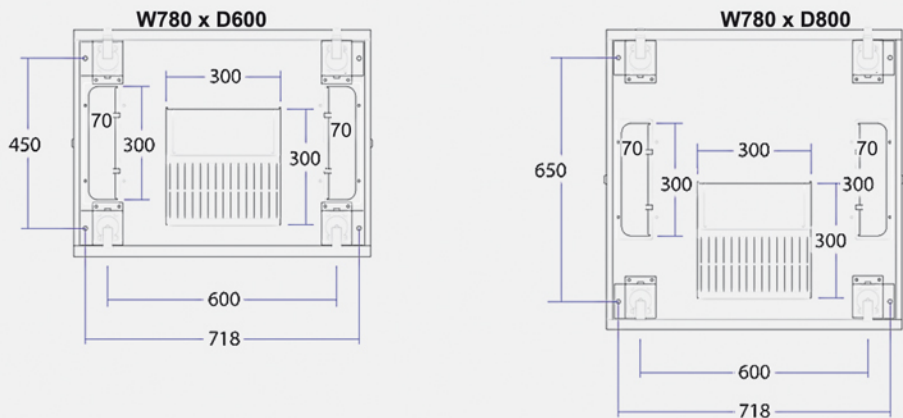



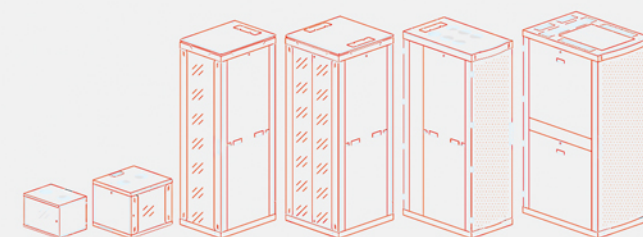

**GURKAN**

**UNIFLAT™ series**

**SERVER CABINETS**  
**SLIMSERVER™ 19"**  
**W600**



**SLIMSERVER™ 19"**

Server Cabinets W600

Depth (mm)

**W600**

D1000


Width (mm)

U-height

**47U 44U 42U 36U 26U**

[cabinet@gurkan.com.tr](mailto:cabinet@gurkan.com.tr)



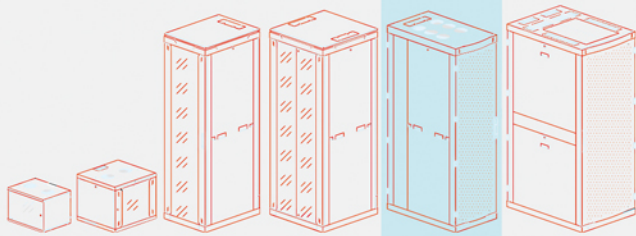

**GURKAN**  
**UNIFLAT™ series**

**SLIMSERVER™ 19" SERVER CABINETS W600**

**TECHNICAL SPECIFICATIONS**

**Materials**

- Steel Sheet Metal;DIN EN 10130
- Galvanized Sheet Metal; DIN EN 10327
- All Metal Parts (Except Support Profiles) are Phosphated & Powder Paint Coated
- All Support Profiles and 19 "Mounting Rails are Manufactured from Galvanized Sheet Metal
- All production materials are in accordance with RoHS Standards

**Dimensions**

- 1U=44,45mm
- 19" = 482,6mm
- Width ( W )
- W=600mm ( 23,6 inch )
- Depth(s) ( D )
- D=1000mm ( 39,3 inch )
- Inner Height(s) ( 1U=44,45mm )
- 26U, 36U, 42U, 44U, 47U

**Quality Certificate**

- ISO 9001 - Quality Managements System
- ISO 14001 - Environmental Management System
- ISO 10002 - Customer Satisfaction Management System
- OHSAS 18001 - Occupational Health and Safety Management System
- ISO 27001 - Information Security Management System

**Product Certificate and Compliances**

- EN 61587-1, Mechanical Structures Certificate for Electronic Equipment
- Protection Class IP20 according to EN 60529-1
- Mounting Applications according to EN 60917-2-1/-2
- Information Technology Device Safety Compliance according to EN 60950-1 and IEC 60364-7-707
- Surface Finishing and Powder Coating Applications according to DIN 67530 and ASTM D 2796

**Protection Class**

- Protection Class IP20



**19 " Assemblies**

- 1U=1HU=44,45mm
- 19" = 482,6mm
- 19" Assembly and Applications according to DIN 340-D and EN 60297-1
- "U" Markings on 19" Mounting Rails
- Mobile 19' Mounting Profiles (Back and Forth)

**Colors**

- Standard, Ral 9005 Black (Textured)
- Optional, Ral 7035 Grey (Textured)


**Shipping Type**

- Delivered in Monoblock or Flatpack (Easy Assembly)

Depth (mm)  
**600 x 1000**  
Width (mm)

**GURKAN**  
**UNIFLAT™ series**  
**SLIMSERVER™ 19"**  
**W600 Standing Type**  
**Network Cabinets**

47U  
44U  
42U  
36U  
26U

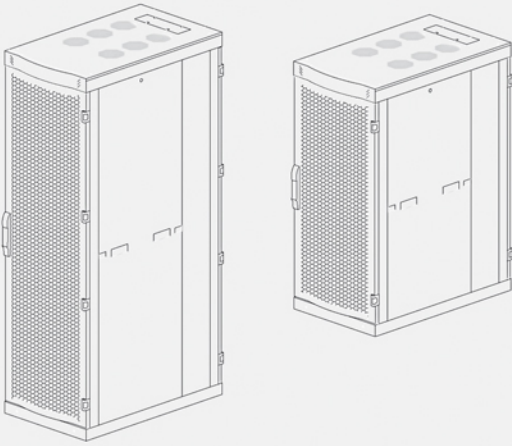

**Mechanical Structure and Functionalities**

**General**

- Ergonomic and Aesthetic Structure
- Anti-Noise Plastic Buffers
- All Parts are Replaceable
- Side-by-Side Mounting and Inner Segmentation
- Available for Cable Organization in all Directions inside the Cabinet
- Air Circulation, max. 1500m3/ht
- Max Load Capacity – 1.250 kg (Stationary)
- Max Load Capacity – 1.000 kg (Mobile)
- 4 Lifting points on Top

**Top Panel**

- Monoblock and Welded
- Ventilated
- Ready to Install max 6 Fan Modules

**Bottom Panel**

- Monoblock and Welded
- Ready for Assembly with Connection Kit
- Cable Access Holes (fixed 300x300mm for side, 300x300mm for rear)
- Optional Levelling Feet or Castors
- Lifting Plinth can be Installed

**Edge Profiles**

- Closed Type Welded Structure
- Axial Mounting in all Edges
- 'U' Standards Dimensioning and Inner Segmentation

**Front Door**

- Aesthetic Structure with Curved Form
- 80% Perforation, Single Sided and Multi Point Lock
- Door Opening Direction can be Changed
- Exterior Hinges
- Opening 180° (for Standalone Cabinets)
- Opening 135° (for Side-by-Side Cabinets)

**Rear Door**

- 80% Perforated Structure with Flat Form
- Single Sided and Multi Point Lock
- Door Opening Direction can be Changed
- Exterior Hinges
- Opening 180° (for Standalone Cabinets)
- Opening 135° (for Side-by-Side Cabinets)


**Side Panels**

- Solid Structure
- Pin Jointed and Single Point Locking
- Handles and Clips

**Grounding**

- All Main Metal Parts with M6x10mm or M6x15mm Copper Coated Ground Studs
- Grounding with Cable Set on Doors



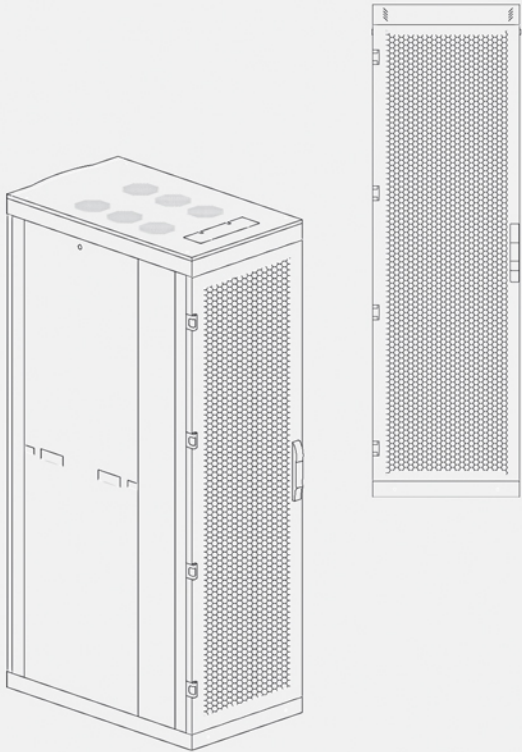

GURKAN

UNIFLAT™ series

SLIMSERVER™ 19"

W600 Standing Type

Network Cabinets

Depth (mm)

600 x 1000

Width (mm)

47U

44U

42U

36U

26U

- Configurations (W780xD1000)mm
- 1 x Bottom Panel
  - 300x300 Air Circulation panel ( front sides without Brush Strip ) and 300x300 Cable Access Holes (at the rear with Brush Strip )
  - 1 x Top Panel
  - 70x300 Cable Access Holes ( at the rear without Brush Strip ) and Air Circulation with max 4 Fan Modules
  - 4 x Edge Profiles
  - 8 x Support Profiles for Depth
  - 4 x 19" Mounting Rails
  - 1 x Top Panel
  - 70x300 Cable Access Holes ( at the rear without Brush Strip ) and Air Circulation perforated
  - 2 x Side Panels
  - (Single Point Lock)
  - 2 x Cabling Covers
  - 1 x Front Door
  - Curved Form with % 80 Perforation, Single Sided and Multi Point Lock
  - 1 x Rear Door
  - Flat Form with % 80 Perforation, Multi Point Lock

| Product Code                                         | U   | Product Description               | Inner Height (hi) | Mounting Depth (d19) | Inner Depth max. (di) |
|------------------------------------------------------|-----|-----------------------------------|-------------------|----------------------|-----------------------|
| W = 600 mm x D=1000 mm STANDING TYPE SERVER CABINETS |     |                                   |                   |                      |                       |
| SSC-2661-1-2M                                        | 26U | 26U 19" (W600 X D1000 X H1317) mm | 1169              | 745                  | 945                   |
| SSC-3661-1-2M                                        | 36U | 36U 19" (W600 X D1000 X H1761) mm | 1613              | 745                  | 945                   |
| SSC-4261-1-2M                                        | 42U | 42U 19" (W600 X D1000 X H2028) mm | 1880              | 745                  | 945                   |
| SSC-4461-1-2M                                        | 44U | 44U 19" (W600 X D1000 X H2117) mm | 1970              | 745                  | 945                   |
| SSC-4761-1-2M                                        | 47U | 47U 19" (W600 X D1000 X H2250) mm | 2102              | 745                  | 945                   |

| Shipping Information |                 |                   |                                     |
|----------------------|-----------------|-------------------|-------------------------------------|
| Dimensions in mm     |                 |                   |                                     |
|                      | Net Weight (kg) | Gross Weight (kg) | Packing Dimensions ( Wp x Dp x Hp ) |
|                      | 83,0            | 95,0              | 625 x 1070 x 1475                   |
|                      | 98,0            | 113,0             | 625 x 1070 x 1915                   |
|                      | 110,0           | 124,0             | 625 x 1070 x 2185                   |
|                      | 121,0           | 135,0             | 625 x 1070 x 2340                   |
|                      | 132,0           | 150,0             | 625 x 1070 x 2405                   |

accessories

|                                                              | Page |
|--------------------------------------------------------------|------|
| - Air Circulation Modules ( Roof Type or 19" Type )          | 91   |
| - Horizontal Cable Organizers ( 19" Type )                   | 98   |
| - Fixed and Sliding Shelves                                  | 84   |
| - Horizontal and Vertical Energy Distribution Modules ( PDU) | 94   |
| - Grounding Cable Sets                                       | 97   |
| - Castors and Levelling Feets                                | 96   |
| - Brush Strip Sets for Cable Access Holes                    | 104  |
| - Floor Anchoring Kits                                       | 105  |
| - Plinths                                                    | 106  |

Dimensions

Width(mm)

Depth (mm)

U

600 x 1000

47U

44U

42U

36U

26U

Top Panel

Section A

Top (without cover)

Front

Rear

Side

Front (door open)

Bottom

GURKAN

UNIFLAT™ series

SLIMSERVER™ 19"

W600 Standing Type

Network Cabinets

U = "U" Dimension ( 1U=44,45mm )

H = External Height

W = External Width

D = External Depth

hi = Inner Height

di = Inner Depth (max.)

d19 = Rack Mounting Depth

ds = Usable Depth (max.)

Zw = Mounting Width of the Floor


W = 600 mm x D = 1000 mm

| U   | W (mm) | D (mm) | H (mm) | hi (mm) | hp (mm) | d19 (mm) | di (mm) | ds (mm) | Zw (mm) |
|-----|--------|--------|--------|---------|---------|----------|---------|---------|---------|
| 26U | 600    | 1000   | 1317   | 1169,0  | 1252    | 745,0    | 945,0   | 845,0   | 420,0   |
| 36U |        |        | 1761   | 1613,0  | 1696    |          |         |         |         |
| 42U |        |        | 2028   | 1880,0  | 1963    |          |         |         |         |
| 44U |        |        | 2117   | 1970,0  | 2052    |          |         |         |         |
| 47U |        |        | 2250   | 2102,0  | 2185    |          |         |         |         |

1U = 44,45 mm

Dimensions in mm



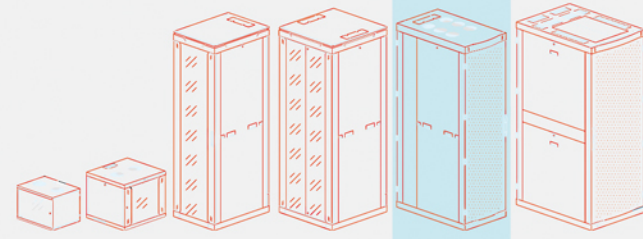

GURKAN

UNIFLAT™ series

SLIMSERVER™ 19" SERVER CABINETS W600

GURKAN

UNIFLAT™ series  
**SLIMSERVER™ 19"**  
**W600 Server Cabinets**

- Cabling Covers**
- Solid Structure
  - Provides Easy Access to the Cable Management
  - Can be Opened from Inside

- Top Panel**
- Monoblock and Welded
  - Ventilated
  - Ready to Install max 6 Fan Modules

- Top Cover**
- Monoblock and Welded
  - Air Circulation Holes
  - Cable Access Holes (Sliding Lid or with Brush Strip Strips)
  - Ready for Assembly with Connection Kit
  - Ceiling Mount Option with Fixing Kit

- Side Panels**
- Solid Structure
  - Pin Jointed and Single Point Locking
  - Handles and Clips

- 19" Mounting Rails**
- 19" Assembly and Applications according to DIN 340-D and TS EN 60297-1
  - "U" Markings on 19" Mounting Rails
  - Mobile 19" Mounting Profiles (Back and Forth)

- Support Profiles**
- Galvanized Sheet Metal
  - Special Multi-Fold Structure

- Front Door**
- Aesthetic Structure with Curved Form
  - %80 Perforation, Single Sided and Multi Point Lock
  - Door Opening Direction can be Changed
  - Exterior Hinges
  - Opening 180° (for Standalone Cabinets)
  - Opening 135° (for Side-by-Side Cabinets)

- Bottom Panel**
- Monoblock and Welded
  - Ready for Assembly with Connection Kit
  - Cable Access Holes - 300x300mm (at rear)
  - Optional Levelling Feet or Castors
  - Lifting Plinth can be Installed

- Edge Profiles**
- Closed Type Welded Structure
  - Axial Mounting in all Edges
  - "U" Standards Dimensioning and Inner Segmentation

Cable Access Hole ( with Brush Strip )

cabinet@gurkan.com.tr

cabinet@gurkan.com.tr







**W600 x D1000**

**GURKAN**  
UNIFLAT™ series  
**STANDFIX™ 19"**  
W600 - W780  
Server Cabinets  
**W780 x D1000**



Top Panel Details

Dimensions in mm

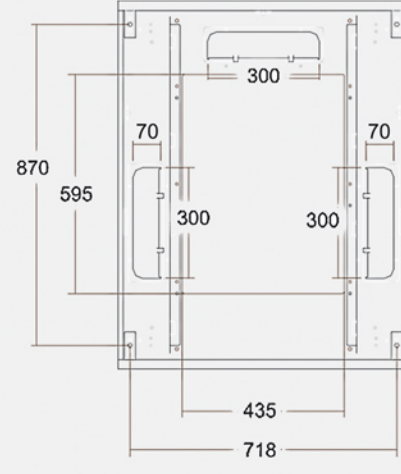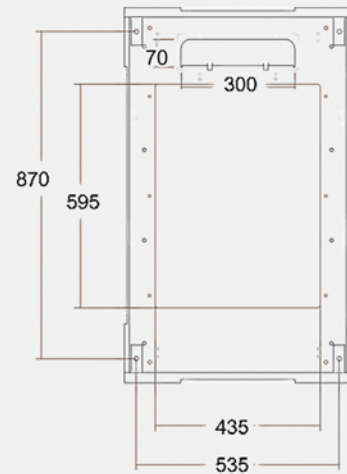



Section-A Details

Dimensions in mm

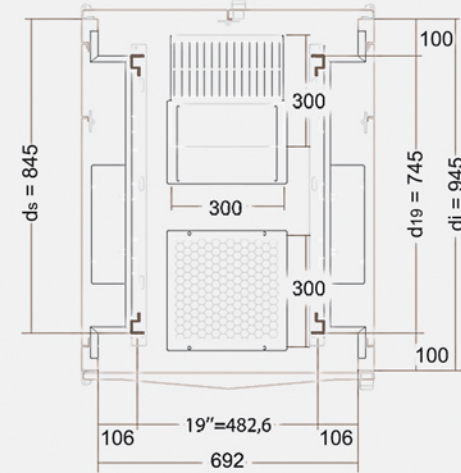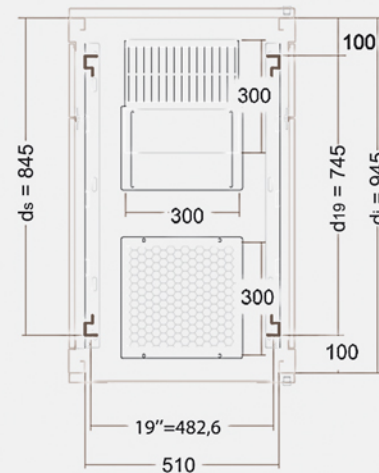


Bottom Panel Details

Dimensions in mm

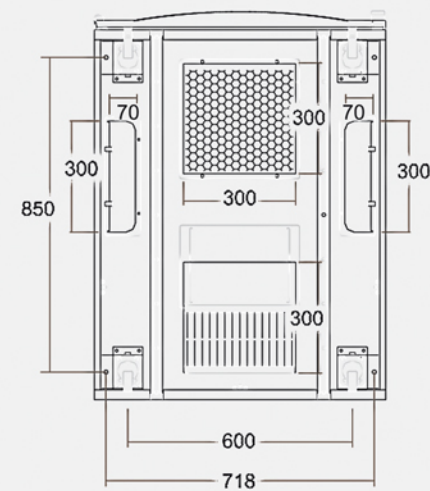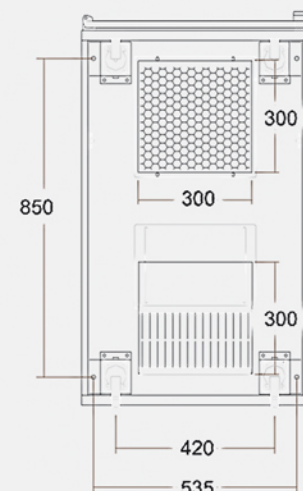

[cabinet@gurkan.com.tr](mailto:cabinet@gurkan.com.tr)

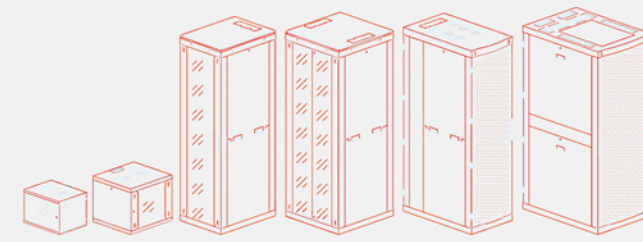

**UNIFLAT™ series**

**GURKAN**

SERVER CABINETS  
**WIDESERVER™ 19"**  
**W780**



U-height


**47U 42U**

**W780**  
Width (mm)

Depth (mm)  
**D1000**

[cabinet@gurkan.com.tr](mailto:cabinet@gurkan.com.tr)



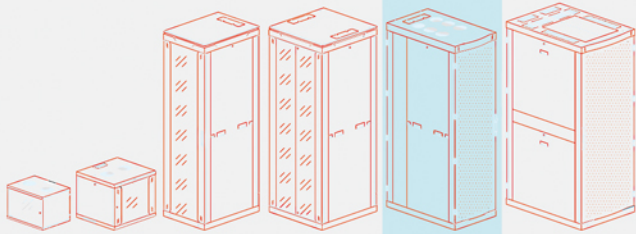

GURKAN

UNIFLAT™ series

WIDESERVER™ 19" SERVER CABINETS W780

TECHNICAL SPECIFICATIONS

Materials

- Steel Sheet Metal;DIN EN 10130
- Galvanized Sheet Metal; DIN EN 10327
- All Metal Parts (Except Support Profiles) are Phosphated & Powder Paint Coated
- All Support Profiles and 19 "Mounting Rails are Manufactured from Galvanized Sheet Metal
- All production materials are in accordance with RoHS Standards

Dimensions

- 1U=44,45mm
- 19" = 482,6mm
- Width ( W )
- W=780mm ( 30,7 inch )
- Depth ( D )
- D=1000mm ( 39,3 inch )

- Inner Height(s) ( 1U=44,45mm )
- 42U, 47U

Quality Certificates

- ISO 9001 - Quality Managements System
- ISO 14001 - Environmental Management System
- ISO 10002 - Customer Satisfaction Management System
- OHSAS 18001 - Occupational Health and Safety Management System
- ISO 27001 - Information Security Management System

Product Certificate and Compliances

- EN 61587-1, Mechanical Structures Certificate for Electronic Equipment
- Protection Class IP20 according to EN 60529-1
- Mounting Applications according to EN 60917-2-1/-2
- Information Technology Device Safety Compliance according to EN 60950-1 and IEC 60364-7-707
- Surface Finishing and Powder Coating Applications according to DIN 67530 and ASTM D 2796

Protection Class

- Protection Class IP20



19 " Assemblies

- 1U=1HU=44,45mm
- 19" = 482,6mm
- 19" Assembly and Applications according to DIN 340-D and EN 60297-1
- "U" Markings on 19" Mounting Rails
- Mobile 19' Mounting Profiles (Back and Forth)

Colors

- Standard, Ral 9005 Black (Textured)
- Optional, Ral 7035 Grey (Textured)

Shipping Type

- Delivered in Monoblock or Flatpack (Easy Assembly)

780 x 1000

Width (mm) Depth (mm)

47U  
42U


GURKAN

UNIFLAT™ series

WIDESERVER™ 19"

W780 Standing Type

Server Cabinets

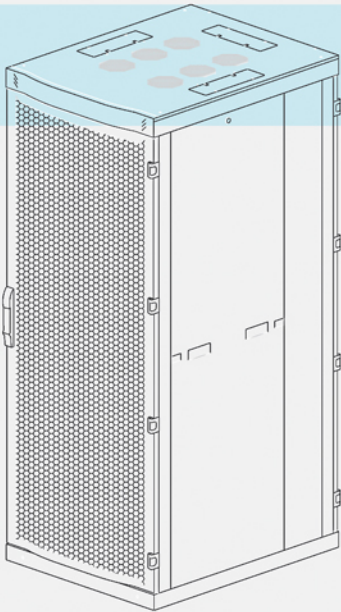

Mechanical Structure and Functionalities

General

- Ergonomic and Aesthetic Structure
- Anti-Noise Plastic Buffers
- All Parts are Replaceable
- Side-by-Side Mounting and Inner Segmentation
- Available for Cable Organization in all Directions inside the Cabinet
- Air Circulation, max.1500m3/h
- "U" Markings on 19" Mounting Rails
- Max Load Capacity – 1.250 kg (Stationary)
- Max Load Capacity – 1.000 kg (Mobile)
- 4 Lifting points on Top

Top Panel

- Monoblock and Welded
- Ventilated
- Ready to Install max 6 Fan Modules

Bottom Panel

- Monoblock and Welded
- Ready for Assembly with Connection Kit
- Cable Access Holes (fixed 300x300mm for side, 300x300mm for rear)
- Optional Levelling Feet or Castors
- Lifting Plinth can be Installed

Edge Profiles

- Closed Type Welded Structure
- Axial Mounting in all Edges
- 'U' Standards Dimensioning and Inner Segmentation



Front Door

- Aesthetic Structure with Curved Form
- %80 Perforation, Single Sided and Multi Point Lock
- Door Opening Direction can be Changed
- Exterior Hinges
- Opening 180° (for Standalone Cabinets)
- Opening 135° (for Side-by-Side Cabinets)

Rear Door

- %80 Perforated Structure with Flat Form
- Double Sided and Multi Point Lock
- Exterior Hinges
- Opening 180° (for Standalone Cabinets)
- Opening 135° (for Side-by-Side Cabinets)



Side Panels

- Solid Structure
- Pin Jointed and Single Point Locking
- Handles and Clips

Grounding

- All Main Metal Parts with M6x10mm or M6x15mm Copper Coated Ground Studs
- Grounding with Cable Set on Doors



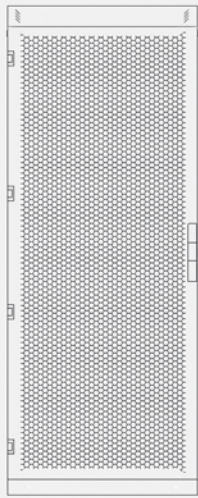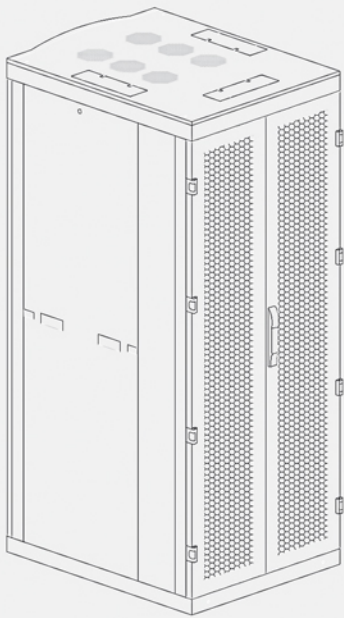

**GURKAN**

**UNIFLAT™ series**  
**WIDESERVER™ 19"**  
**W780 Standing Type**  
**Network Cabinets**

**47U**  
**42U**

Depth (mm)  
**780 x 1000**  
Width (mm)

**Configurations**  
**(W780xD1000)mm**

- 1 x Bottom Panel  
70x300 Cable Access Holes (right and left sides without Brush Strip )  
and 300x300 Cable Access Holes (at the rear with Brush Strip and  
300x300 Air Circulation hole With Perforated
- 1 x Top Panel  
70x300 Cable Access Holes (right and left sides without Brush Strip )  
and Air Circulation with max 6 Fan Modules
- 4 x Edge Profiles
- 8 x Support Profiles for Depth
- 4 x 19" Mounting Rails
- 1 x Top Panel  
3x70x300 Cable Access Holes (right and left sides without Brush Strip )
- 2 x Side Panels
- 2 x Cabling Covers
- 1 x Front Door  
Curved Form with % 80 Perforation, Single Sided and Multi Point Lock
- 1 x Rear Door  
Flat Form with % 80 Perforation, Multi Point Lock

**Shipping Information**



Dimensions in mm

| Product Code | U | Product Description | Inner Height<br>(hi) | Mounting Depth<br>(d19) | Inner Depth<br>max. (di) |
|--------------|---|---------------------|----------------------|-------------------------|--------------------------|
|--------------|---|---------------------|----------------------|-------------------------|--------------------------|

| Net Weight<br>(kg) | Gross Weight<br>(kg) | Packing Dimensions<br>( Wp x Dp x Hp ) |
|--------------------|----------------------|----------------------------------------|
|--------------------|----------------------|----------------------------------------|

W = 780 mm x **D=1000 mm** **STANDING TYPE SERVER CABINETS**

**WIDESERVER™ 19"**

|               |            |                                             |      |     |     |       |       |                   |
|---------------|------------|---------------------------------------------|------|-----|-----|-------|-------|-------------------|
| SWX-4286-1-2M | <b>42U</b> | 42U 19"<br>(W780 X <b>D1000</b> X H2028) mm | 1880 | 745 | 945 | 126,0 | 143,0 | 825 x 1070 x 2185 |
| SWX-4786-1-2M | <b>47U</b> | 47U 19"<br>(W780 X <b>D1000</b> X H2250) mm | 2102 | 745 | 945 | 150,0 | 168,0 | 825 x 1070 x 2405 |

**accessories**

|                                                              | Page |
|--------------------------------------------------------------|------|
| - Air Circulation Modules ( Roof Type or 19" Type )          | 91   |
| - Horizontal Cable Organizers ( 19" Type )                   | 98   |
| - Fixed and Sliding Shelves                                  | 84   |
| - Horizontal and Vertical Energy Distribution Modules ( PDU) | 94   |
| - Grounding Cable Sets                                       | 97   |
| - Castors and Levelling Feets                                | 96   |
| - Brush Strip Sets for Cable Access Holes                    | 104  |
| - Floor Anchoring Kits                                       | 105  |
| - Plinths                                                    | 106  |



**Dimensions**

Width (mm)      Depth (mm)

**780 x 1000**

**U**

**47U**  
**42U**

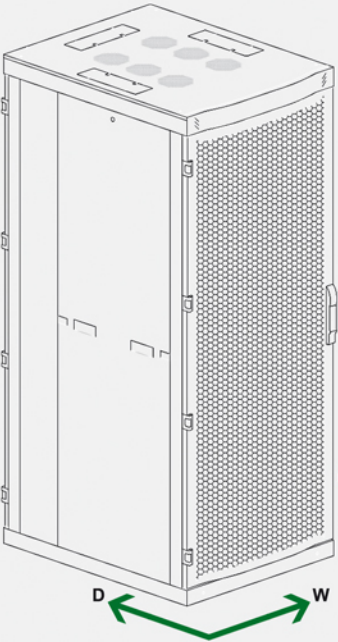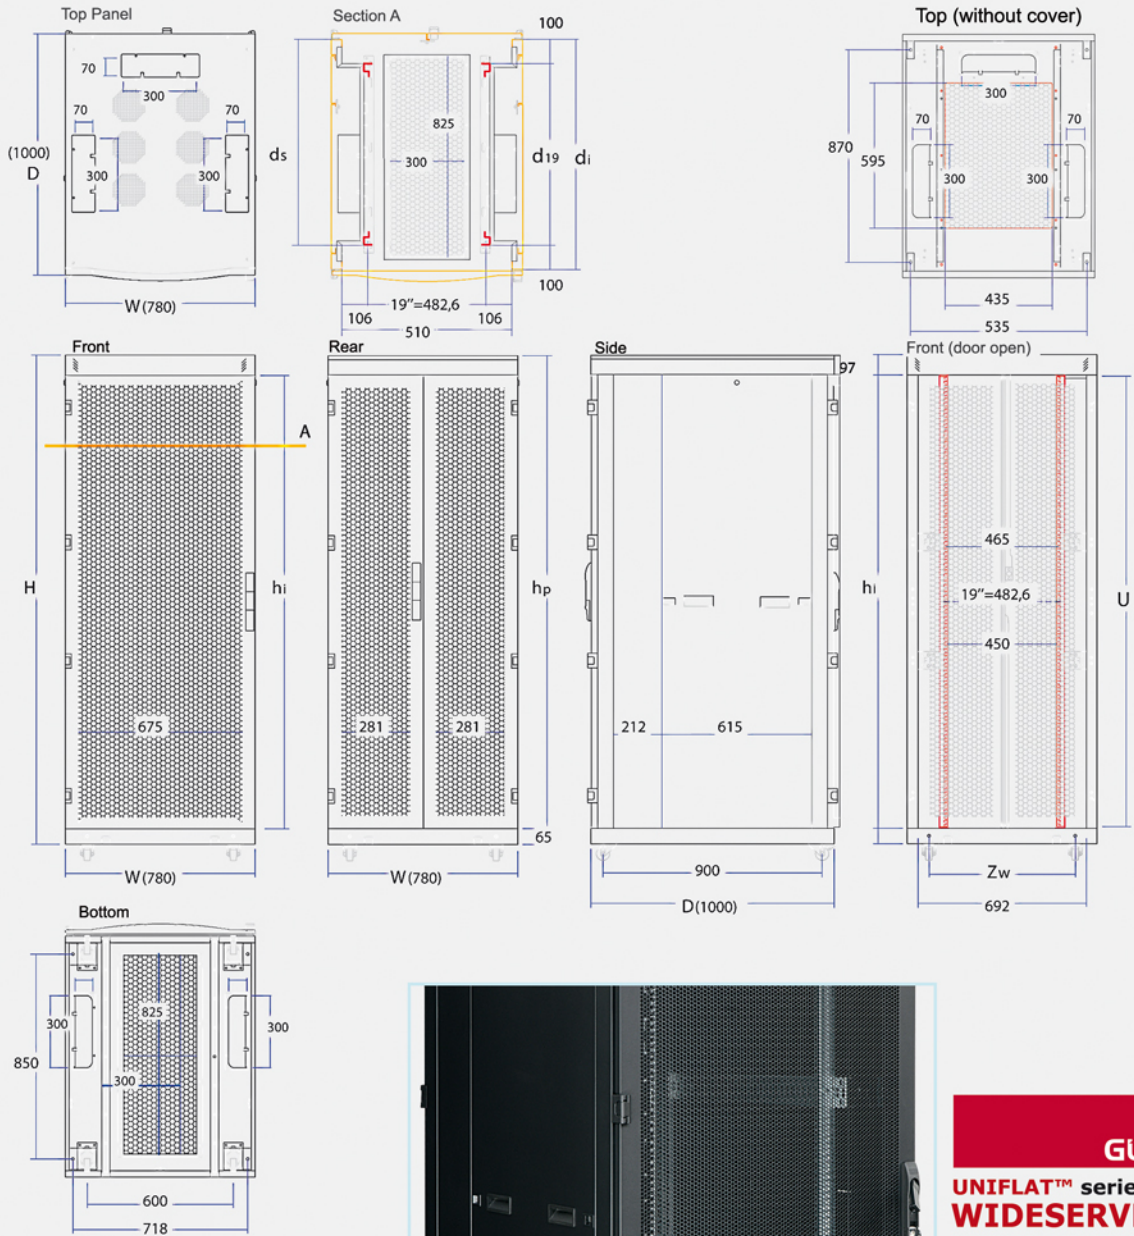

**GURKAN**

**UNIFLAT™ series**  
**WIDESERVER™ 19"**  
**W780 Standing Type**  
**Server Cabinets**

- U = "U" Dimension ( 1U=44,45mm )
- H = External Height
- W = External Width
- D = External Depth
- hi = Inner Height
- di = Inner Depth (max.)
- d19 = Rack Mounting Depth
- ds = Usable Depth (max.)
- Zw = Mounting Width of the Floor

W = 780 mm x **D = 1000 mm**

| U   | W<br>(mm) | D<br>(mm) | H<br>(mm) | hi<br>(mm) | hp<br>(mm) | d19<br>(mm) | di<br>(mm) | ds<br>(mm) | Zw<br>(mm) |
|-----|-----------|-----------|-----------|------------|------------|-------------|------------|------------|------------|
| 42U | 780       | 1000      | 2028      | 1880,0     | 1963       | 745,0       | 945,0      | 845,0      | 600,0      |
| 47U |           |           | 2250      | 2102,0     | 2185       |             |            |            |            |

1U = 44,45 mm

Dimensions in mm



SLIMSERVER™ 19" WIDESERVER™ 19"


**GURKAN**

UNIFLAT™ series  
**SLIMSERVER™ 19"**  
**WIDESERVER™ 19"**  
 W600 - W780  
 Standing Type  
 Server Cabinets

47U  
 44U  
 42U  
 36U  
 26U





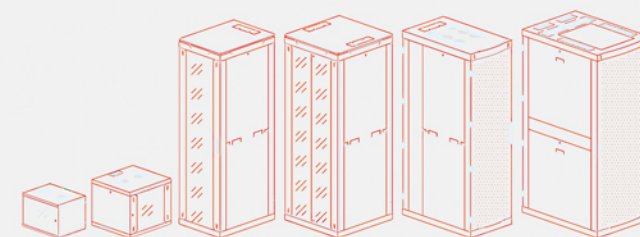

**GURKAN**

**UNIFLAT™ series**

**SERVER CABINETS**

**DCC SERVER™ 19"**

**W600**

**W780**



**DCC SERVER™ 19"**

**dataCENTER DCC Server Cabinets W600 - W780**

U-height (mm)

**42U**

Depth (mm)

**W780**  
Width (mm)

D1100  
D1200


Depth (mm)

**W600**  
Width (mm)

D1100  
D1200

[cabinet@gurkan.com.tr](mailto:cabinet@gurkan.com.tr)



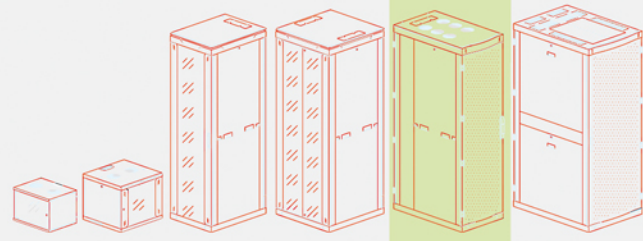

GURKAN

UNIFLAT™ series

DCC SERVER™ 19" W600 - W780 DataCENTER Cabinets



## TECHNICAL SPECIFICATIONS

### Materials

- Steel Sheet Metal; DIN EN 10130
- Galvanized Sheet Metal; DIN EN 10327
- All Metal Parts (Except Mounting Rails) are Phosphated & Powder Paint Coated
- All Support Profiles and 19" Mounting Rails are Manufactured from Galvanized Sheet Metal
- All production materials are in accordance with RoHS Standards

### Dimensions

- 1U=44,45mm
- 19" = 482,6mm
- Widths ( W )
- W=600mm ( 23,6 inch )
- W=780mm ( 30,7 inch )

- Depths ( D )
- D=1100mm ( 43,3 inch )
- D=1200mm ( 47,2 inch )

- Inner Height ( 1U=44,45mm )
- 42U

### Quality Certificates

- ISO 9001 - Quality Managements System
- ISO 14001 - Environmental Management System
- ISO 10002 - Customer Satisfaction Management System
- ISO 18001 - Occupational Health and Safety Management System
- ISO 27001 - Information Security Management System

### Product Certificate and Compliances

- EN 61587-1, Mechanical Structures Certificate for Electronic Equipment
- Protection Class IP20 according to EN 60529-1
- Mounting Applications according to EN 60917-2-1/-2
- Information Technology Device Safety Compliance according to EN 60950-1 and IEC 60364-7-707
- Surface Finishing and Powder Coating Applications according to DIN 67530 and ASTM D 2796

### Protection Class

- Protection Class IP20

### 19 " Assemblies

- 1U=1HU=44,45mm
- 19" = 482,6mm
- 19" Assembly and Applications according to DIN 340-D and EN 60297-1
- 'U' Standards Dimensioning and Marking on 19" Profiles
- Mobile 19" Mounting Profiles (back and forth)

### Colors

- Standard, Ral 9005 Black (Textured)
- Optional, Ral 7035 Grey (Textured)

### Shipping Type

- Delivered in Monoblock or Flatpack (Easy Assembly)

Depth (mm)  
**600 x 1100**  
**600 x 1200**  
Width (mm)

42U

**GURKAN**  
UNIFLAT™ series  
DCC SERVER™ 19"



### Mechanical Structure and Functionalities

#### General

- Ergonomic and Aesthetic Structure
- Available for Cold and Hot Rooms
- Anti-Noise Plastic Buffers
- All Parts are Replaceable
- Side-by-Side Mounting and Inner Segmentation
- Available for Cable Organization in all Directions inside the Cabinet
- Suitable for Server Equipment
- Air Circulation, max.1500m3/h
- "U" Markings on 19" Mounting Rails
- Max Load Capacity – 1.500 kg (Stationary)
- Max Load Capacity – 1.250 kg (Mobile)
- 4 Lifting points on Top

#### Top Panel

- Monoblock and Welded
- Ventilated
- Ready to Install max 6 Fan Modules
- Data Cable Shielding Partition

#### Bottom Panel

- Monoblock and Welded
- Ready for Assembly with Connection Kit
- Cable Access Holes (fixed 300x300mm for side, 300x300mm for rear)
- Optional Levelling Feet or Castors
- Lifting Plinth can be Installed

#### Edge Profiles

- Closed Type Welded Structure
- Axial Mounting in all Edges
- 'U' Standarts Dimensioning and Inner Segmentation

Depth (mm)

**780 x 1100**  
**780 x 1200**  
Width (mm)

42U



#### Front Door

- Aesthetic Structure with Curved Form
- %80 Perforation, Single Sided and Multi Point Lock
- Door Opening Direction can be Changed
- Exterior Hinges
- Opening 180° (for Standalone Cabinets)
- Opening 135° (for Side-by-Side Cabinets)

#### Rear Door

- %80 Perforated Structure with Flat Form
- Double Sided and Multi Point Lock
- Exterior Hinges
- Opening 180° (for Standalone Cabinets)
- Opening 135° (for Side-by-Side Cabinets)


#### Side Panels

- Solid Structure
- Pin Jointed and Single Point Locking
- Handles and Clips

#### Grounding

- All Main Metal Parts with M6x10mm or M6x15mm Copper Coated Ground Studs
- Grounding with Cable Set on Doors



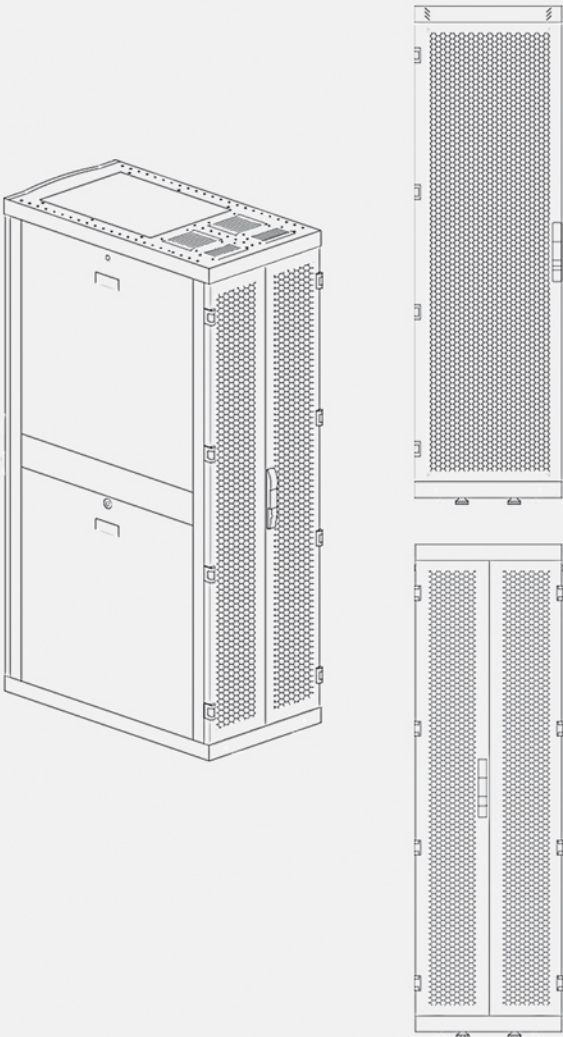

GURKAN

UNIFLAT™ series

DCC SERVER™ 19"

Depth (mm)

600 x 1100

600 x 1200

780 x 1100

780 x 1200

Width (mm)

42U

Configurations  
(W600/W780)x(D1100/D1200)mm

- 1 x Bottom Panel

2 x160x325 Cable Access Holes (at the rear with brush strip)

1 x 430x595 Perforated Cover

- 1 x Top Panel

2x90x155 Cable Access Holes (at the rear with brush strip ),

2x155x155 Cable Access Holes (at the rear with brush strip ),

430x595 Perforated Cover

Ventilation Fan Module can be Installed (on request)

- 4 x Edge profiles

- 8 x Support Profiles for Depth

- 4 x 19" HD Profile Set

- 4 x Side covers (Single Point Lock )

- 1 x Front Door

Curved Form with % 80 Perforation, Single Sided and

Multi Point Lock

- 1 x Rear Door

Flat Form with % 80 Perforation, Multi Point Lock

| Product Code                                         | U   | Product Description                  | Inner Height<br>(hi) | Mounting Depth<br>(d19) | Inner Depth<br>max. (di) |
|------------------------------------------------------|-----|--------------------------------------|----------------------|-------------------------|--------------------------|
| W = 600 mm x D=1100 mm/D=1200 mm DCC SERVER CABINETS |     |                                      |                      |                         |                          |
| DCC-4261-1-2M                                        | 42U | 42U 19"<br>(W600 X D1100 X H2028) mm | 1880                 | 745                     | 945                      |
| DCC-4262-1-2M                                        | 42U | 42U 19"<br>(W600 X D1200 X H2028) mm | 1880                 | 745                     | 945                      |
| W = 780 mm x D=1100 mm/D=1200 mm DCC SERVER CABINETS |     |                                      |                      |                         |                          |
| DCC-4281-1-2M                                        | 42U | 42U 19"<br>(W780 X D1100 X H2028) mm | 1880                 | 745                     | 945                      |
| DCC-4282-1-2M                                        | 42U | 42U 19"<br>(W780 X D1200 X H2028) mm | 1880                 | 745                     | 945                      |

| Shipping Information |                      |                                        |  |
|----------------------|----------------------|----------------------------------------|--|
| Dimensions in mm     |                      |                                        |  |
| Net Weight<br>(kg)   | Gross Weight<br>(kg) | Packing Dimensions<br>( Wp x Dp x Hp ) |  |
| 134,0                | 152,0                | 625 x 1170 x 2185                      |  |
| 146,0                | 160,0                | 625 x 1270 x 2185                      |  |

accessories

|                                                              | Page |
|--------------------------------------------------------------|------|
| - Air Circulation Modules ( Roof Type or 19" Type )          | 91   |
| - Horizontal Cable Organizers ( 19" Type )                   | 98   |
| - Fixed and Sliding Shelves                                  | 84   |
| - Horizontal and Vertical Energy Distribution Modules ( PDU) | 94   |
| - Grounding Cable Sets                                       | 97   |
| - Castors and Levelling Feets                                | 96   |
| - Brush Strip Sets for Cable Access Holes                    | 104  |
| - Floor Anchoring Kits                                       | 105  |
| - Plinths                                                    | 106  |
| - Data Cable Shielding Partition                             | 104  |


cabinet@gurkan.com.tr

Dimensions

Width (mm)      Depth (mm)

U

600 x 1100 (1200) 42U

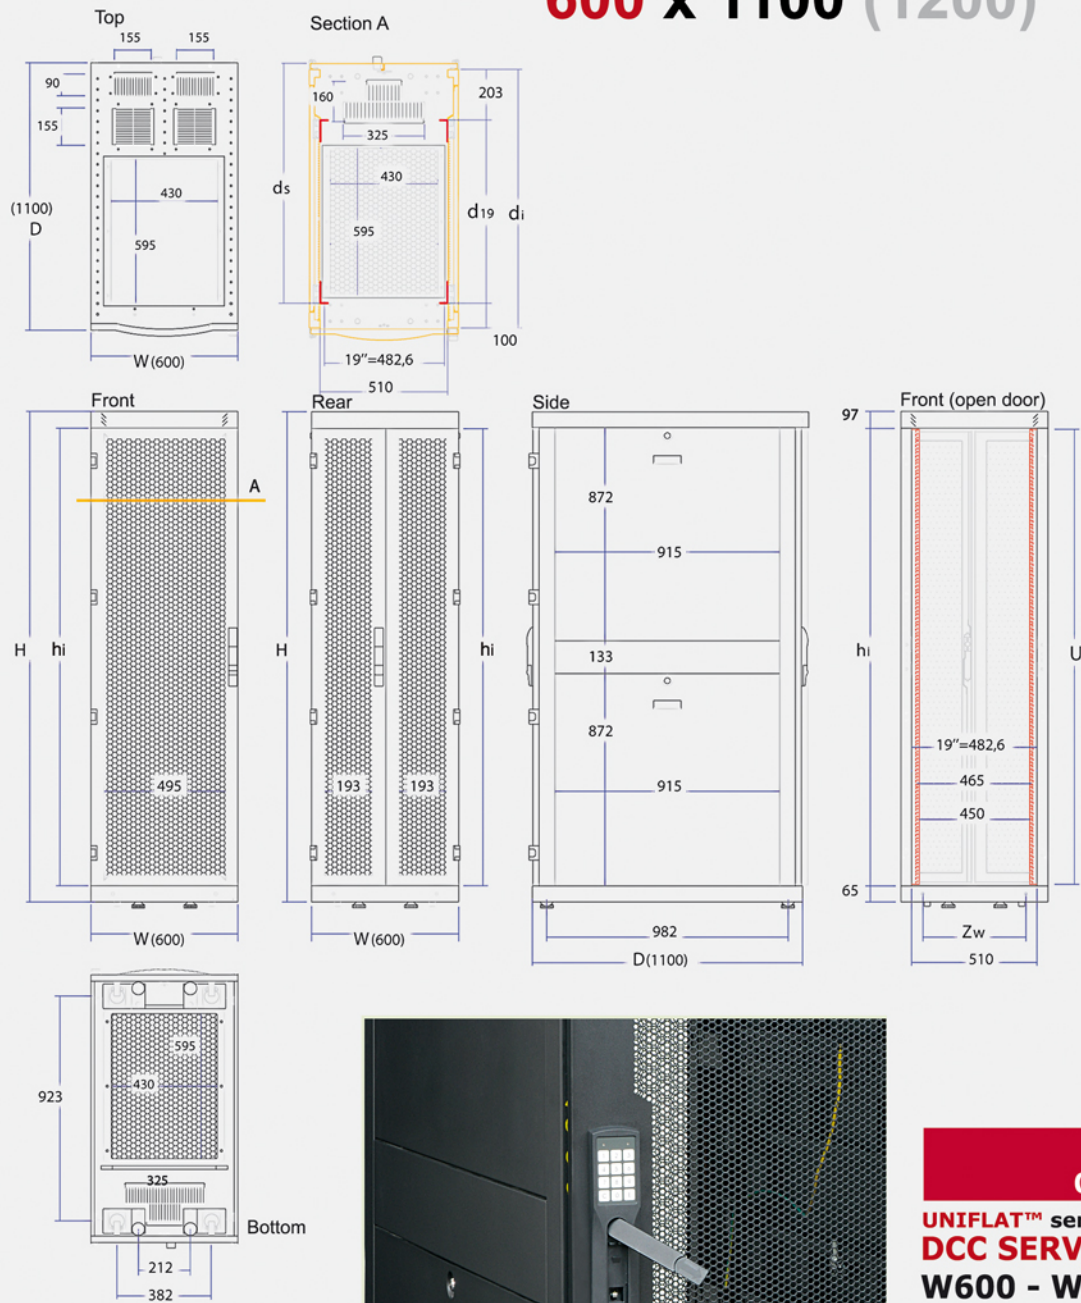

GURKAN

UNIFLAT™ series

DCC SERVER™ 19"

W600 - W780

dataCENTER

DCC Server

Cabinets

U = "U" Dimension ( 1U=44,45mm )  
H = External Height  
W = External Width  
D = External Depth  
hi = Inner Height  
di = Inner Depth (max.)  
d19 = Rack Mounting Depth  
ds = Usable Depth (max.)  
Zw = Mounting Width of the Floor

W = 600 mm x D=1100 mm/D=1200 mm


| U   | W<br>(mm) | D<br>(mm) | H<br>(mm) | hi<br>(mm) | d19<br>(mm) | di<br>(mm) | ds<br>(mm) | Zw<br>(mm) |
|-----|-----------|-----------|-----------|------------|-------------|------------|------------|------------|
| 42U | 600       | 1100      | 2028      | 1880,0     | 745,0       | 1043,0     | 970,0      | 420,0      |
| 42U | 600       | 1200      | 2028      | 1880,0     | 845,0       | 1143,0     | 1070,0     | 420,0      |

1U = 44,45 mm

Dimensions in mm

cabinet@gurkan.com.tr



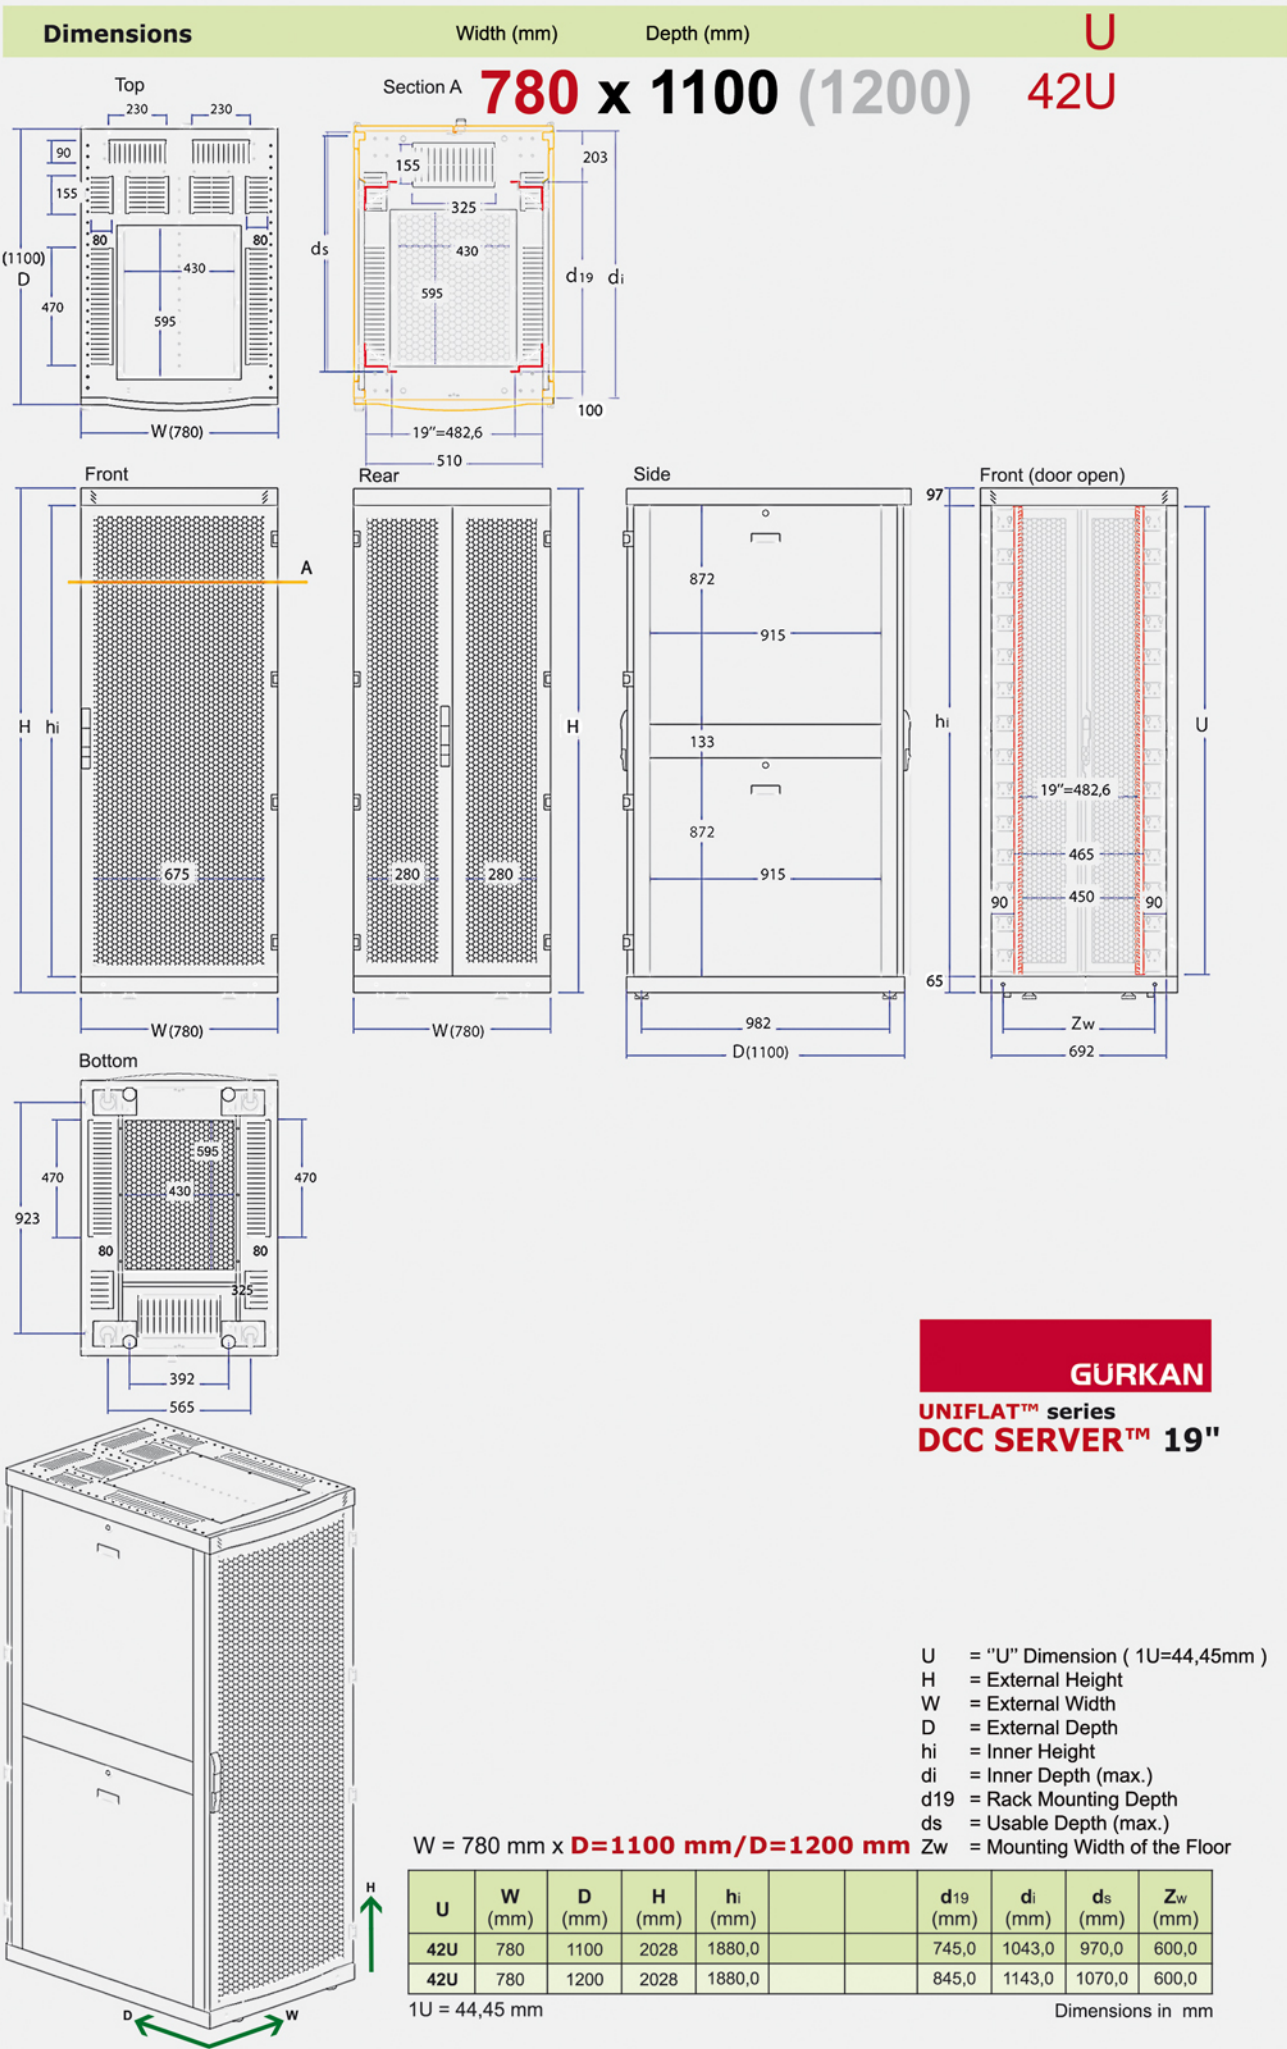

GURKAN

UNIFLAT™ series

DCC SERVER™ 19"





**GURKAN**  
UNIFLAT™ series  
**DCC SERVER™ 19"**



**32 x 70**



**32 x 140**



**70 x 85**



Shipping Information



Dimensions in mm

| Product Code | Description | Net Weight (kg) | Gross Weight (kg) | Package Quantity ( pcs ) |
|--------------|-------------|-----------------|-------------------|--------------------------|
|--------------|-------------|-----------------|-------------------|--------------------------|

**Click-fit Cable Organizers ( for DCC Server Cabinets)**

|             |                                                     |      |      |    |
|-------------|-----------------------------------------------------|------|------|----|
| KDCC-3270-2 | (32x70)mm Click-fit Cable Organizer, Black-Ral9005  | 0,12 | 0,20 | 16 |
| KDCC-3214-2 | (32x140)mm Click-fit Cable Organizer, Black-Ral9005 | 0,21 | 0,30 | 16 |
| KDCC-7085-2 | (70x85)mm Click-fit Cable Organizer, Black-Ral9005  | 0,18 | 0,25 | 16 |
| KDCC-7096-2 | (70x96)mm Click-fit Cable Organizer, Black-Ral9005  | 0,20 | 0,30 | 16 |



**Side by side Mounting Kit ( for DCC SERVER CABINETS)**

|             |                                                                              |      |      |   |
|-------------|------------------------------------------------------------------------------|------|------|---|
| KBC1-1M61-2 | Side by side Mounting Kit (U-Form Click-fit), 2xM6x15, Black-Ral9005 (4 Set) | 0,36 | 0,45 | 4 |
|-------------|------------------------------------------------------------------------------|------|------|---|



cabinet@gurkan.com.tr

**GURKAN**  
UNIFLAT™ series  
**DCC SERVER™ 19"**



Shipping Information



Dimensions in mm

| Product Code | Description | Net Weight (kg) | Gross Weight (kg) | Package Quantity ( pcs ) |
|--------------|-------------|-----------------|-------------------|--------------------------|
|--------------|-------------|-----------------|-------------------|--------------------------|


**W=600mm V-Type Partitioning Duct (for DCC Server Cabinets)**

|               |                                                        |      |      |   |
|---------------|--------------------------------------------------------|------|------|---|
| PDC-W60H085-2 | (w600xh85)mm V-Type Partitioning Duct , Black-Ral9005  | 0,85 | 1,25 | 1 |
| PDC-W60H135-2 | (w600xh135)mm V-Type Partitioning Duct , Black-Ral9005 | 1,02 | 1,35 | 1 |
| PDC-W60H185-2 | (w600xh185)mm V-Type Partitioning Duct , Black-Ral9005 | 2,22 | 2,75 | 1 |



**W=800mm V-Type Partitioning Duct (for DCC Server Cabinets)**

|               |                                                        |      |      |   |
|---------------|--------------------------------------------------------|------|------|---|
| PDC-W80H085-2 | (w780xh85)mm V-Type Partitioning Duct , Black-Ral9005  | 1,14 | 1,50 | 1 |
| PDC-W80H135-2 | (w780xh135)mm V-Type Partitioning Duct , Black-Ral9005 | 1,62 | 2,00 | 1 |
| PDC-W80H185-2 | (w780xh185)mm V-Type Partitioning Duct , Black-Ral9005 | 2,91 | 3,50 | 1 |

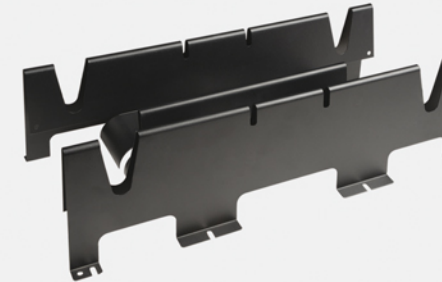

**W=600mm/W=800mm W-Type Partitioning Duct (for DCC Server Cabinets)**

|                |                                                        |      |      |   |
|----------------|--------------------------------------------------------|------|------|---|
| PDC-WW60H185-2 | (w600xh185)mm W-Type Partitioning Duct , Black-Ral9005 | 3,80 | 4,50 | 1 |
| PDC-WW80H185-2 | (w780xh185)mm W-Type Partitioning Duct , Black-Ral9005 | 5,30 | 6,00 | 1 |



**W=600mm/W=800mm V-Type Screening Duct (for DCC Server Cabinets)**

|                |                                                     |      |      |   |
|----------------|-----------------------------------------------------|------|------|---|
| PDC-PW60H085-2 | (w600xh85)mm V-Type Screening Duct , Black-Ral9005  | 1,50 | 1,85 | 1 |
| PDC-PW60H185-2 | (w600xh185)mm V-Type Screening Duct , Black-Ral9005 | 2,22 | 2,75 | 1 |
| PDC-PW80H085-2 | (w780xh85)mm V-Type Screening Duct , Black-Ral9005  | 1,75 | 2,25 | 1 |
| PDC-PW80H185-2 | (w780xh185)mm V-Type Screening Duct , Black-Ral9005 | 2,91 | 3,50 | 1 |



cabinet@gurkan.com.tr



GURKAN

UNIFLAT™ series

DCC SERVER™ 19"

| Shipping Information |             |  | Dimensions in mm |                   |                          |
|----------------------|-------------|--|------------------|-------------------|--------------------------|
| Product Code         | Description |  | Net Weight (kg)  | Gross Weight (kg) | Package Quantity ( pcs ) |



Adjustable Leveling Feet

|             |                                            |      |      |   |
|-------------|--------------------------------------------|------|------|---|
| PAYS-M12P-2 | M12, Adjustable levelling feet (1Set=4pcs) | 0,45 | 0,60 | 1 |
|-------------|--------------------------------------------|------|------|---|



Grounding Cable Set (for doors and covers)

|             |                                                           |  |  |   |
|-------------|-----------------------------------------------------------|--|--|---|
| GNDS-7007-1 | Grounding cable set<br>( for DCC Type Cabinets, 1x6,0mm²) |  |  | 1 |
|-------------|-----------------------------------------------------------|--|--|---|







- Ventilation Modules
- 19" Horizontal Cable Organizers
- Vertical Cable Organizers and Cable Ducts
- Fixed and Sliding Shelves
- Energy Distribution Modules ( PDU )
- Lightining Unit for Cabinets
- Grounding Cable Sets
- 19" Copper Bar Set
- Brush Strip Sets ( for cable access holes )
- Transport Castors
- Floor Mounting Kit
- Blank Panels, for 19" Mounting
- Plinths




[cabinet@gurkan.com.tr](mailto:cabinet@gurkan.com.tr)



GURKAN

19"Accessories

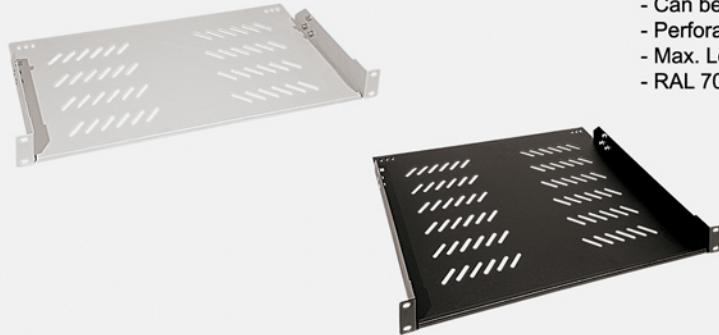

19" Fixed Shelves ( 1U, 2U )

- 19", 1U
- 4 Point Front Mounting
- Can be Mounted on Rear Support Profiles
- Perforated
- Max. Load - 13 kg
- RAL 7035 Grey (TX) or Ral 9005 Black (TX)

Shipping Information

Dimensions in mm

| Product Code | U  | Description                                      | Shelf Depth (dr) | Net Weight (kg) | Gross Weight (kg) | Packing Dimensions ( wp x dp x hp ) |
|--------------|----|--------------------------------------------------|------------------|-----------------|-------------------|-------------------------------------|
| SR1U-D201-1  | 1U | 1U, 19", D=200mm FIXED SHELF, GREY -Ral 7035-TX  | 200              | 0,97            | 1,25              | 520 x 350 x 50                      |
| SR1U-D251-1  | 1U | 1U, 19", D=250mm FIXED SHELF, GREY -Ral 7035-TX  | 250              | 1,00            | 1,30              | 520 x 275 x 50                      |
| SR1U-D351-1  | 1U | 1U, 19", D=315mm FIXED SHELF, GREY -Ral 7035-TX  | 315              | 1,50            | 1,85              | 520 x 350 x 50                      |
| SR1U-D401-1  | 1U | 1U, 19", D=385mm FIXED SHELF, GREY -Ral 7035-TX  | 385              | 1,80            | 2,25              | 520 x 425 x 50                      |
| SR1U-D551-1  | 1U | 1U, 19", D=540mm FIXED SHELF, GREY -Ral 7035-TX  | 540              | 2,50            | 3,25              | 520 x 575 x 50                      |
| SR1U-D351-2  | 1U | 1U, 19", D=315mm FIXED SHELF, BLACK -Ral 9005-TX | 315              | 1,50            | 1,85              | 520 x 350 x 50                      |
| SR1U-D401-2  | 1U | 1U, 19", D=385mm FIXED SHELF, BLACK -Ral 9005-TX | 385              | 1,80            | 2,25              | 520 x 425 x 50                      |
| SR1U-D551-2  | 1U | 1U, 19", D=540mm FIXED SHELF, BLACK -Ral 9005-TX | 540              | 2,50            | 3,25              | 520 x 575 x 50                      |
| SR2U-D351-2  | 2U | 2U, 19", D=315mm FIXED SHELF, BLACK -Ral 9005-TX | 315              | 1,69            | 1,90              | 520 x 350 x 50                      |
| SR2U-D401-2  | 2U | 2U, 19", D=385mm FIXED SHELF, BLACK -Ral 9005-TX | 385              | 2,10            | 2,45              | 520 x 425 x 50                      |
| SR2U-D551-2  | 2U | 2U, 19", D=540mm FIXED SHELF, BLACK -Ral 9005-TX | 540              | 2,90            | 3,50              | 520 x 575 x 50                      |



(1U, 19" Front Mounting Fixed Shelf Compatible with)

| DR  | SoHO Type |     | Wall Type |     | Standing Type |     |      |      |
|-----|-----------|-----|-----------|-----|---------------|-----|------|------|
|     | 300       | 400 | 450       | 560 | 600           | 800 | 1000 | 1100 |
| 250 | x         | x   | x         | x   | x             | x   | x    | x    |
| 315 |           | x   | x         | x   | x             | x   | x    | x    |
| 385 |           |     | x         | x   | x             | x   | x    | x    |
| 540 |           |     |           |     | x             | x   | x    | x    |

Dimensions in mm

Adjustable Shelf Support  
(Shelf for Rear, 1U, 2U )

|             |    |                                                           |      |      |                 |
|-------------|----|-----------------------------------------------------------|------|------|-----------------|
| BS1U-D250-1 | 1U | 1U Adjustable Shelf Support , 250mm ( GREY-Ral 7035-TX )  | 0,50 | 0,75 | 520 x 350 x 50  |
| BS1U-D250-2 | 1U | 1U Adjustable Shelf Support , 250mm ( BLACK-Ral 9005-TX ) | 0,50 | 0,75 | 520 x 350 x 50  |
| BS2U-D350-2 | 2U | 2U Adjustable Shelf Support , 250mm ( BLACK-Ral 9005-TX ) | 0,75 | 1,00 | 520 x 350 x 100 |



| (1U, 19" Front Mounting Fixed Shelf Compatible with) |           |     |           |     |               |     |      |      |
|------------------------------------------------------|-----------|-----|-----------|-----|---------------|-----|------|------|
| DR                                                   | SoHO Type |     | Wall Type |     | Standing Type |     |      |      |
|                                                      | 300       | 400 | 450       | 560 | 600           | 800 | 1000 | 1100 |
| 250                                                  | x         | x   | x         | x   | x             | x   | x    | x    |
| 315                                                  |           | x   | x         | x   | x             | x   | x    | x    |
| 385                                                  |           |     | x         | x   | x             | x   | x    | x    |
| 540                                                  |           |     |           |     | x             | x   | x    | x    |

Adjustable Shelf Support  
(Shelf for Rear, 1U, 2U )

|             |    |                                                           |      |      |                 |
|-------------|----|-----------------------------------------------------------|------|------|-----------------|
| BS1U-D250-1 | 1U | 1U Adjustable Shelf Support , 250mm ( GREY-Ral 7035-TX )  | 0,50 | 0,75 | 520 x 350 x 50  |
| BS1U-D250-2 | 1U | 1U Adjustable Shelf Support , 250mm ( BLACK-Ral 9005-TX ) | 0,50 | 0,75 | 520 x 350 x 50  |
| BS2U-D350-2 | 2U | 2U Adjustable Shelf Support , 250mm ( BLACK-Ral 9005-TX ) | 0,75 | 1,00 | 520 x 350 x 100 |

GURKAN

19"Accessories





19" Fixed Shelves , Adjustable ( 2U )

- 19", 2U
- Front and Rear Mounting
- Can be Mounted on Rear Support Profiles
- Perforated
- Max. Load - 25 kg
- RAL 7035 Grey (TX) or Ral 9005 Black (TX)

Shipping Information

Dimensions in mm

| Product Code | U  | Description                                              | Shelf Depth (dr) | Net Weight (kg) | Gross Weight (kg) | Packing Dimensions ( wp x dp x hp ) |
|--------------|----|----------------------------------------------------------|------------------|-----------------|-------------------|-------------------------------------|
| SA2U-D351-1  | 2U | 2U,19",D=315mm FIXED SHELF, ADJUSTABLE,GREY-Ral 7035-TX  | 315              | 1,80            | 2,25              | 520 x 350 x 100                     |
| SA2U-D401-1  | 2U | 2U,19",D=385mm FIXED SHELF, ADJUSTABLE,GREY-Ral 7035-TX  | 385              | 2,00            | 2,45              | 520 x 425 x 100                     |
| SA2U-D551-1  | 2U | 2U,19",D=540mm FIXED SHELF, ADJUSTABLE,GREY-Ral 7035-TX  | 540              | 2,70            | 3,25              | 520 x 575 x 100                     |
| SA2U-D351-2  | 2U | 2U,19",D=315mm FIXED SHELF, ADJUSTABLE,BLACK-Ral 9005-TX | 315              | 1,80            | 2,25              | 520 x 350 x 100                     |
| SA2U-D401-2  | 2U | 2U,19",D=385mm FIXED SHELF, ADJUSTABLE,BLACK-Ral 9005-TX | 385              | 2,00            | 2,45              | 520 x 425 x 100                     |
| SA2U-D551-2  | 2U | 2U,19",D=540mm FIXED SHELF, ADJUSTABLE,BLACK-Ral 9005-TX | 540              | 2,70            | 3,25              | 520 x 575 x 100                     |
| SA2U-D651-2  | 2U | 2U,19",D=640mm FIXED SHELF, ADJUSTABLE,BLACK-Ral 9005-TX | 640              | 3,70            | 4,50              | 520 x 675 x 100                     |
| SA2U-D751-2  | 2U | 2U,19",D=740mm FIXED SHELF, ADJUSTABLE,BLACK-Ral 9005-TX | 740              | 4,00            | 5,00              | 520 x 775 x 100                     |

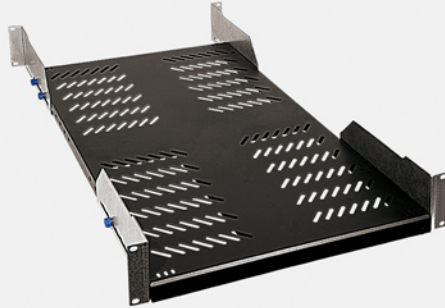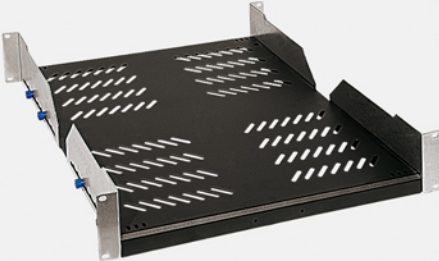




(2U, 19" Front Mounting Fixed Shelf Compatible with)

| DR  | SoHO Type |     | Wall Type |     | Standing Type |     |      |      |
|-----|-----------|-----|-----------|-----|---------------|-----|------|------|
|     | 300       | 400 | 450       | 560 | 600           | 800 | 1000 | 1100 |
| 315 |           |     | x         | x   | x             | x   | x    | x    |
| 385 |           |     |           | x   | x             | x   | x    | x    |
| 540 |           |     |           |     |               | x   | x    | x    |
| 640 |           |     |           |     |               |     | x    | x    |
| 740 |           |     |           |     |               |     | x    | x    |

Dimensions in mm

Front Mounting and Adjustment ( 2U )

Rear Mounting and Adjustment ( 2U )

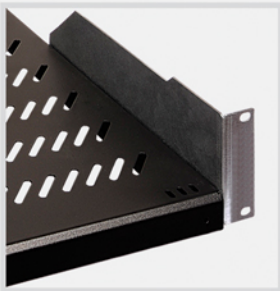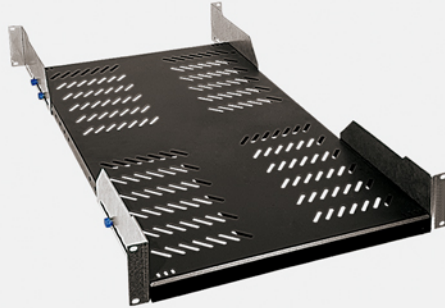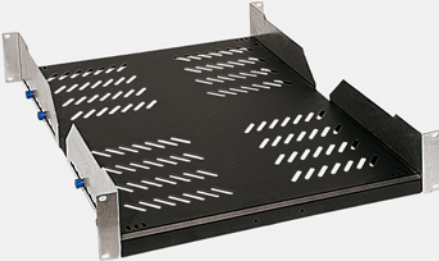

Front Mounting and Adjustment ( 2U )

Rear Mounting and Adjustment ( 2U )



GURKAN

19"Accessories

Fixed Shelves (Side Screw Type -1)


- ½U

- 4 Point Side Mounting

- Perforated

- Max. Load - 30 kg



- Ral 7035 Grey (TX) or Ral 9005 Black (TX)

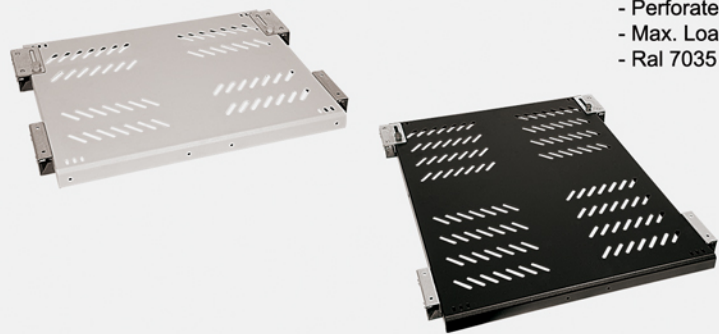

Shipping Information

Dimensions in mm

| Product Code | U  | Description                                                             | Shelf Depth (dr) | Net Weight (kg) | Gross Weight (kg) | Packing Dimensions ( wp x dp x hp ) |
|--------------|----|-------------------------------------------------------------------------|------------------|-----------------|-------------------|-------------------------------------|
| SR0U-D450-1  | ½U | FIXED SHELF for D=450mm CABINETS, ( Type-1 Mount ), GREY -Ral 7035-TX   | 315              | 1,70            | 1,95              | 520 X 350 X 50                      |
| SR0U-D560-1  | ½U | FIXED SHELF for D=560mm CABINETS, ( Type-1 Mount ), GREY -Ral 7035-TX   | 385              | 1,90            | 2,25              | 520 X 350 X 50                      |
| SR0U-D600-2  | ½U | FIXED SHELF for D=600mm CABINETS, ( Type-1 Mount ), BLACK -Ral 9005-TX  | 385              | 1,90            | 2,25              | 520 x 350 x 50                      |
| SR0U-D800-2  | ½U | FIXED SHELF for D=800mm CABINETS, ( Type-1 Mount ), BLACK -Ral 9005-TX  | 540              | 2,50            | 3,00              | 520 x 450 x 50                      |
| SR0U-D100-2  | ½U | FIXED SHELF for D=1000mm CABINETS, ( Type-1 Mount ), BLACK -Ral 9005-TX | 740              | 3,00            | 3,75              | 520 x 775 x 50                      |

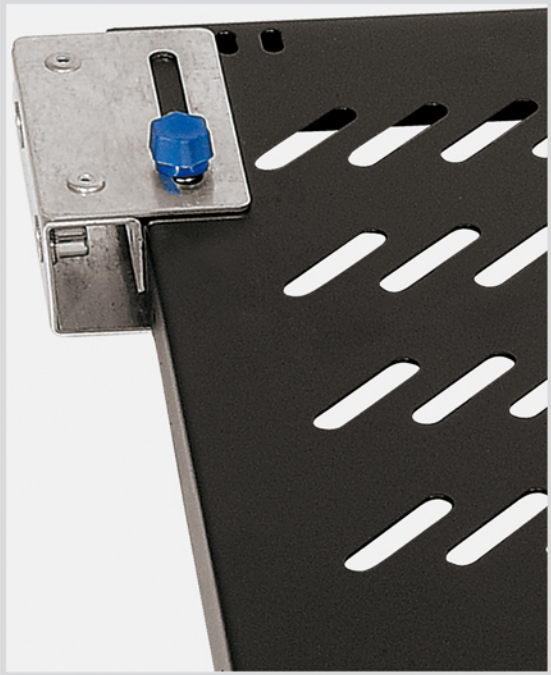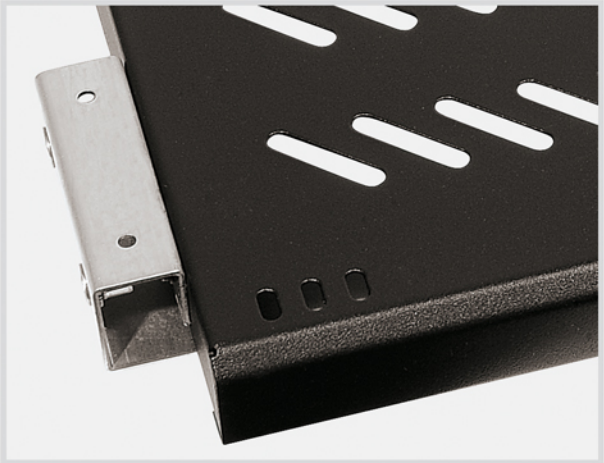

| ( ½ U for Fixed Shelves -Type1 Mounting - Compatible with) |           |     |           |     |               |     |      |      |
|------------------------------------------------------------|-----------|-----|-----------|-----|---------------|-----|------|------|
| DR – Shelf Depth (mm)                                      |           |     |           |     |               |     |      |      |
| D – Cabinet Depth (mm)                                     |           |     |           |     |               |     |      |      |
| DR                                                         | SoHO Type |     | Wall Type |     | Standing Type |     |      |      |
|                                                            | 300       | 400 | 450       | 560 | 600           | 800 | 1000 | 1100 |
| 315                                                        |           |     | x         | x   |               |     |      |      |
| 385                                                        |           |     |           |     | x             |     |      |      |
| 540                                                        |           |     |           |     |               | x   |      |      |
| 740                                                        |           |     |           |     |               |     | x    | x    |

Dimensions in mm

GURKAN

19"Accessories

Fixed Shelves (Side Screw Type -2)

- ½U


- Support Profiles

- 4 Point Side Mounting

- Perforated

- Max. Load - 45 kg

- Ral 7035 Grey (TX) or Ral 9005 Black (TX)

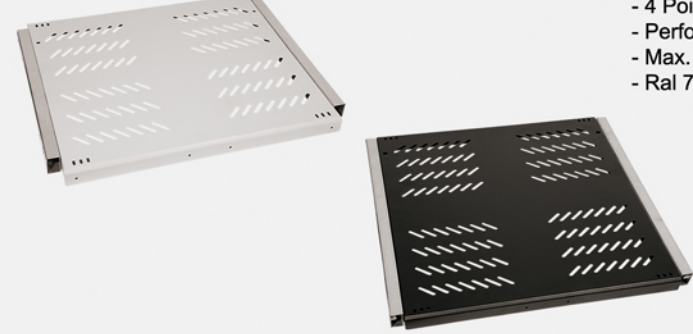

Shipping Information

Dimensions in mm

| Product Code | U  | Description                                                           | Shelf Depth (dr) | Net Weight (kg) | Gross Weight (kg) | Packing Dimensions ( wp x dp x hp ) |
|--------------|----|-----------------------------------------------------------------------|------------------|-----------------|-------------------|-------------------------------------|
| SRD1-D450-1  | ½U | FIXED SHELF for D=450mm CABINETS, ( Type-2 Mount ), GREY -Ral 7035-TX | 315              | 1,70            | 2,00              | 520 X 350 X 50                      |
| SRD1-D560-1  | ½U | FIXED SHELF for D=560mm CABINETS, ( Type-2 Mount ), GREY -Ral 7035-TX | 385              | 1,90            | 2,25              | 520 X 450 X 50                      |

|             |    |                                                                         |     |      |      |                |
|-------------|----|-------------------------------------------------------------------------|-----|------|------|----------------|
| SRD1-D600-2 | ½U | FIXED SHELF for D=600mm CABINETS, ( Type-2 Mount ), BLACK -Ral 9005-TX  | 385 | 1,90 | 2,25 | 520 x 450 x 50 |
| SRD1-D800-2 | ½U | FIXED SHELF for D=800mm CABINETS, ( Type-2 Mount ), BLACK -Ral 9005-TX  | 540 | 2,80 | 3,25 | 520 x 575 x 50 |
| SRD1-D100-2 | ½U | FIXED SHELF for D=1000mm CABINETS, ( Type-2 Mount ), BLACK -Ral 9005-TX | 740 | 3,57 | 4,25 | 520 x 775 x 50 |




| ( ½ U for Fixed Shelves –Type 2 Mounting - Compatible with) |           |     |           |     |               |     |      |      |
|-------------------------------------------------------------|-----------|-----|-----------|-----|---------------|-----|------|------|
| DR – Shelf Depth (mm)                                       |           |     |           |     |               |     |      |      |
| D – Cabinet Depth (mm)                                      |           |     |           |     |               |     |      |      |
| DR                                                          | SoHO Type |     | Wall Type |     | Standing Type |     |      |      |
|                                                             | 300       | 400 | 450       | 560 | 600           | 800 | 1000 | 1100 |
| 315                                                         |           |     | x         |     |               |     |      |      |
| 385                                                         |           |     |           | x   | x             |     |      |      |
| 540                                                         |           |     |           |     |               | x   |      |      |
| 740                                                         |           |     |           |     |               |     | x    | x    |

Dimensions in mm



GURKAN  
19"Accessories

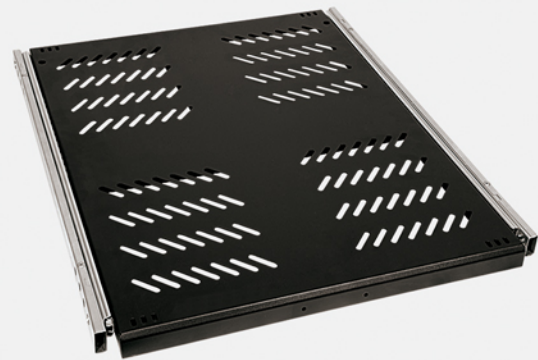

Sliding Shelves (Side Screw Type -2)

- ½U
- Support Profiles
- On Slides
- 4 Point Side Mounting
- Perforated
- Max. Load - 45 kg
- Ral 7035 Grey (TX) or Ral 9005 Black (TX)

Shipping Information



Dimensions in mm



| Product Code | U  | Description                                                            | Shelf Depth (dr) | Net Weight (kg) | Gross Weight (kg) | Packing Dimensions (wp x dp x hp) |
|--------------|----|------------------------------------------------------------------------|------------------|-----------------|-------------------|-----------------------------------|
| HRD1-D450-1  | ½U | SLIDING SHELF for D=450mm CABINETS,(Type-2 Mount), GREY -Ral 7035-TX   | 315              | 1,50            | 1,75              | 520 X 350 X 50                    |
| HRD1-D560-1  | ½U | SLIDING SHELF for D=560mm CABINETS,(Type-2 Mount), GREY -Ral 7035-TX   | 385              | 1,70            | 2,00              | 520 X 450 X 50                    |
| HRD1-D600-2  | ½U | SLIDING SHELF for D=600mm CABINETS,(Type-2 Mount), BLACK -Ral 9005-TX  | 385              | 1,70            | 2,00              | 520 x 450 x 50                    |
| HRD1-D800-2  | ½U | SLIDING SHELF for D=800mm CABINETS,(Type-2 Mount), BLACK -Ral 9005-TX  | 540              | 2,50            | 2,85              | 520 x 575 x 50                    |
| HRD1-D100-2  | ½U | SLIDING SHELF for D=1000mm CABINETS,(Type-2 Mount), BLACK -Ral 9005-TX | 740              | 3,20            | 4,00              | 520 x 775 x 50                    |



( ½ U for Sliding Shelves –Type 2 Mounting - Compatible with)


| DR – Shelf Depth (mm)  |           |     |           |     |               |     |      |      |
|------------------------|-----------|-----|-----------|-----|---------------|-----|------|------|
| D – Cabinet Depth (mm) |           |     |           |     |               |     |      |      |
| DR                     | SoHO Type |     | Wall Type |     | Standing Type |     |      |      |
|                        | 300       | 400 | 450       | 560 | 600           | 800 | 1000 | 1100 |
| 315                    |           |     | x         |     |               |     |      |      |
| 385                    |           |     |           | x   | x             |     |      |      |
| 540                    |           |     |           |     |               | x   |      |      |
| 740                    |           |     |           |     |               |     | x    | x    |

Dimensions in mm

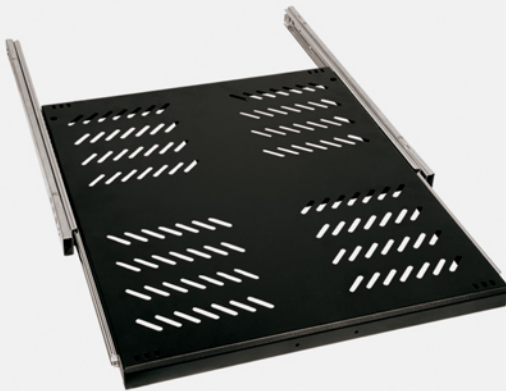

cabinet@gurkan.com.tr

GURKAN  
19"Accessories

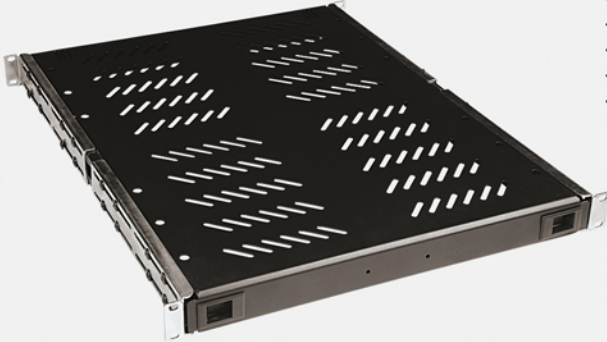

1U, 19" Fixed Server Shelves (HD)


- 1U, 19"
- Support Profiles
- 4 Point Side Mounting
- Locking Mechanism
- Perforated
- Max. Load - 75 kg
- Ral 7035 Grey (TX) or Ral 9005 Black (TX)

Shipping Information



Dimensions in mm

| Product Code | U  | Description                                                           | Shelf Depth (dr) | Net Weight (kg) | Gross Weight (kg) | Packing Dimensions (wp x dp x hp) |
|--------------|----|-----------------------------------------------------------------------|------------------|-----------------|-------------------|-----------------------------------|
| SSR1-D600-2  | 1U | 1U, 19", FIXED SERVER SHELF for D=600mm CABINETS, BLACK -Ral 9005-TX  | 385              | 3,00            | 3,50              | 520 X 450 X 50                    |
| SSR1-D800-2  | 1U | 1U, 19", FIXED SERVER SHELF for D=800mm CABINETS, BLACK -Ral 9005-TX  | 540              | 4,00            | 4,75              | 520 X 575 X 50                    |
| SSR1-D100-2  | 1U | 1U, 19", FIXED SERVER SHELF for D=1000mm CABINETS, BLACK -Ral 9005-TX | 740              | 5,00            | 6,00              | 520 X 775 X 50                    |

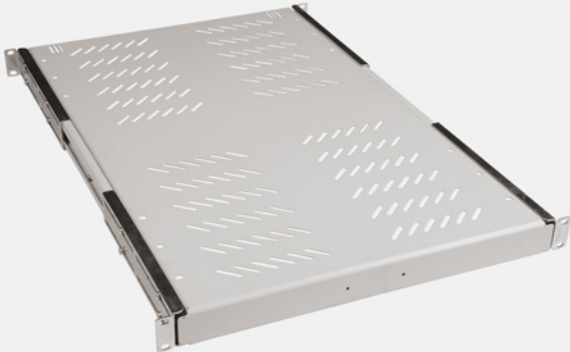

(1U, 19" for Fixed Server HD-Shelves - Compatible with)

| DR – Shelf Depth (mm)  |           |     |           |     |               |     |      |      |
|------------------------|-----------|-----|-----------|-----|---------------|-----|------|------|
| D – Cabinet Depth (mm) |           |     |           |     |               |     |      |      |
| DR                     | SoHO Type |     | Wall Type |     | Standing Type |     |      |      |
|                        | 300       | 400 | 450       | 560 | 600           | 800 | 1000 | 1100 |
|                        |           |     |           |     |               |     |      |      |
| 385                    |           |     |           |     | x             | x   |      |      |
| 540                    |           |     |           |     |               | x   | x    |      |
| 740                    |           |     |           |     |               |     | x    | x    |

Dimensions in mm




cabinet@gurkan.com.tr



GURKAN

19"Accessories

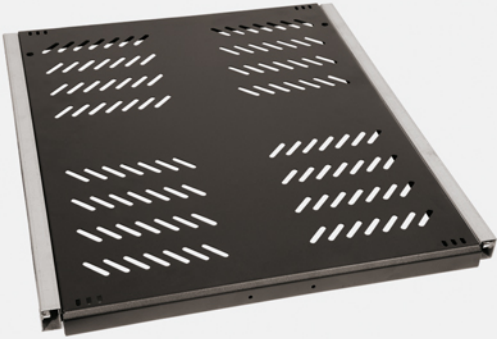

1U, 19" Sliding Server Shelves (HD)

- 1U, 19"
- Support Profiles
- 4 Point Side Mounting
- Locking Mechanism
- Perforated
- Max. Load - 65 kg
- Ral 7035 Grey (TX) or Ral 9005 Black (TX)

Shipping Information



| Product Code | U  | Description                                                            | Shelf Depth (dr) | Net Weight (kg) | Gross Weight (kg) | Packing Dimensions (wp x dp x hp) |
|--------------|----|------------------------------------------------------------------------|------------------|-----------------|-------------------|-----------------------------------|
| SHR1-D600-2  | 1U | 1U, 19", SLIDING SERVER SHELF for D=600mm CABINETS, BLACK-Ral 9005-TX  | 385              | 4,00            | 4,75              | 520 X 450 X 50                    |
| SHR1-D800-2  | 1U | 1U, 19", SLIDING SERVER SHELF for D=800mm CABINETS, BLACK-Ral 9005-TX  | 540              | 5,00            | 6,00              | 520 X 575 X 50                    |
| SHR1-D100-2  | 1U | 1U, 19", SLIDING SERVER SHELF for D=1000mm CABINETS, BLACK-Ral 9005-TX | 740              | 6,00            | 7,00              | 520 X 775 X 50                    |



(1U, 19" for Sliding Server HD-Shelves - Compatible with)

|     |           | DR – Shelf Depth (mm)  |     |               |     |     |      |      |  |
|-----|-----------|------------------------|-----|---------------|-----|-----|------|------|--|
|     |           | D – Cabinet Depth (mm) |     |               |     |     |      |      |  |
| DR  | SoHO Type | Wall Type              |     | Standing Type |     |     |      |      |  |
|     | 300       | 400                    | 450 | 560           | 600 | 800 | 1000 | 1100 |  |
| 385 |           |                        |     |               | x   | x   |      |      |  |
| 540 |           |                        |     |               |     | x   | x    |      |  |
| 740 |           |                        |     |               |     |     | x    | x    |  |

Dimensions in mm



|             |    |                                                              |      |      |                 |
|-------------|----|--------------------------------------------------------------|------|------|-----------------|
| SHR1-D100-2 | 1U | 1U, SLIDING SHELF CABLE CONVEYING MECHANISM, (650mm OPENING) | 1,80 | 2,50 | 520 X 100 X 100 |
|-------------|----|--------------------------------------------------------------|------|------|-----------------|

cabinet@gurkan.com.tr

GURKAN

19"Accessories



Ventilation Unit ( Ceiling Type )

- 240Vac
- On-Off Switch Controlled
- 0...60°C Thermostad Controlled
- Fused and Impedance Protected
- Max.60.000 Hours of Continuous Operation
- Ral 7035 Grey (TX) or Ral 9005 Black (TX)
- CE, RoHS Certified

Shipping Information




Compatible with wall mounting cabinets,

| Product Code | U  | Description                                                                                | Modul Type | Net Weight (kg) | Gross Weight (kg) | Packing Dimensions (wp x dp x hp) |
|--------------|----|--------------------------------------------------------------------------------------------|------------|-----------------|-------------------|-----------------------------------|
| HPTD-1FT2-1  | 1U | Ventilation unit with 1-fan ( On-Off Switch and thermostad controlled ), GREY -Ral 7035-TX | 2 Fan-hole | 2,50            | 2,75              | 520 x 300 x 50                    |
| HPTD-2FT2-1  | 1U | Ventilation unit with 2-fan ( On-Off Switch and thermostad controlled ), GREY -Ral 7035-TX | 2 Fan-hole | 3,00            | 3,35              | 520 x 300 x 50                    |



|             |    |                                                                                            |            |      |      |                |
|-------------|----|--------------------------------------------------------------------------------------------|------------|------|------|----------------|
| HPTD-2FT1-2 | 1U | Ventilation unit with 2-fan ( On-Off Switch and thermostad controlled ), BLACK-Ral 9005-TX | 4 Fan-hole | 3,15 | 3,65 | 520 X 450 X 50 |
| HPTD-4FT1-2 | 1U | Ventilation unit with 4-fan ( On-Off Switch and thermostad controlled ), BLACK-Ral 9005-TX | 4 Fan-hole | 4,75 | 5,25 | 520 X 450 X 50 |

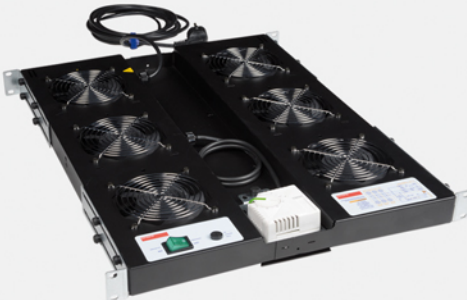

|             |    |                                                                                            |            |      |      |                |
|-------------|----|--------------------------------------------------------------------------------------------|------------|------|------|----------------|
| HSTD-2FT2-2 | 1U | Ventilation unit with 2-fan ( On-Off Switch and thermostad controlled ), BLACK-Ral 9005-TX | 6 Fan-hole | 4,00 | 4,35 | 520 X 650 X 50 |
| HSTD-4FT2-2 | 1U | Ventilation unit with 4-fan ( On-Off Switch and thermostad controlled ), BLACK-Ral 9005-TX | 6 Fan-hole | 5,50 | 6,00 | 520 X 650 X 50 |
| HSTD-6FT2-2 | 1U | Ventilation unit with 6-fan ( On-Off Switch and thermostad controlled ), BLACK-Ral 9005-TX | 6 Fan-hole | 6,50 | 7,25 | 520 X 650 X 50 |



|             |                                                           |  |  |  |
|-------------|-----------------------------------------------------------|--|--|--|
| THRA1-AT1-G | 0...60 °C Thermostad Unit ( T1-Type with Cable ), 1NO-1NC |  |  |  |
| THRA1-AT1-G | 0...60 °C Thermostad Unit ( T2-Type with Cable ),1NC      |  |  |  |
| NMKA1-100-A | Dehumidifier ( 220Vac, 100Watt )                          |  |  |  |

cabinet@gurkan.com.tr



**GURKAN**  
**19"Accessories**



2-Fan Module Layout



4-Fan Module Layout






6-Fan Module Layout



**Ventilation Fan Module  
Layouts ( Ceiling Type )**

- Inside the Cabinet U-invariant Measure
- The Thermostat Elements can be Routed Inside the Cabinet
- Wire Mesh Protection for Hand Contact

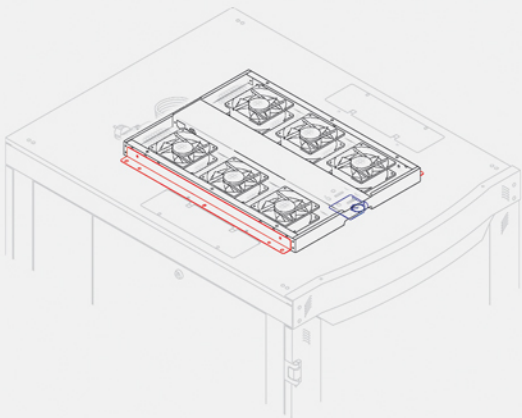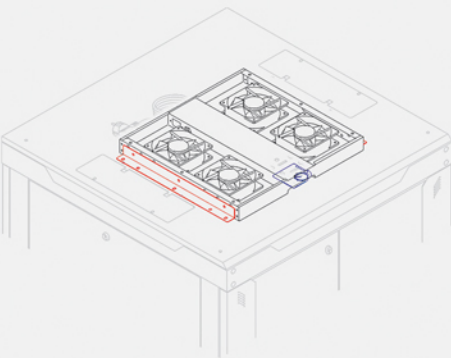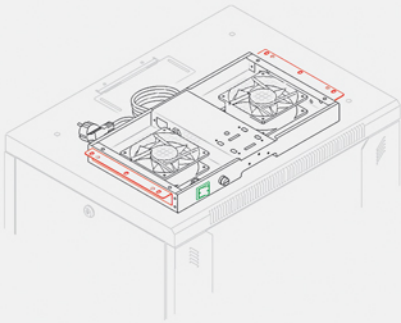

**GURKAN**  
**19"Accessories**



**19" Rack Mount Ventilation Unit  
( 1U, Rack Type )**

- 240Vac
- On-Off Switch Controlled
- 0...60°C Thermostat Controlled
- Fused and Impedance Protected
- Max.60.000 hours of Continuous Operation
- Ral 7035 Grey (TX) or Ral 9005 Black (TX)
- CE, RoHS Certified

| Shipping Information |  |  |
|----------------------|--|--|
| Dimensions in mm     |  |  |

| Product Code | U  | Description                                                                                                    | Net Weight (kg) | Gross Weight (kg) | Packing Dimensions (wp x dp x hp) |
|--------------|----|----------------------------------------------------------------------------------------------------------------|-----------------|-------------------|-----------------------------------|
| HY1U-2FT1-1  | 1U | 19", 1U Ventilation unit with 2-fan ( Rack type, On-Off Switch and thermostat controlled ), GREY -Ral 7035-TX  | 2,50            | 2,75              | 540 X 300 X 60                    |
| HY1U-4FT1-2  | 1U | 19", 1U Ventilation unit with 4-fan ( Rack type, On-Off Switch and thermostat controlled ), BLACK -Ral 9005-TX | 4,75            | 5,25              | 540 X 450 X 60                    |
| HY1U-6FT1-2  | 1U | 19", 1U Ventilation unit with 6-fan ( Rack type, On-Off Switch and thermostat controlled ), BLACK -Ral 9005-TX | 6,50            | 7,00              | 540 X 650 X 60                    |





**GURKAN**  
**19"Accessories**



**19" Rack Mount  
1U, 2U Basic PDU**

- In Accordance with IEC, DIN, BS Standards
- 19", 1U, 2U, Rack Mounted
- 240Vac, Max.4000 Watt
- 1x16 Amper Fuse Protected
- DIN 49440 Socked, DIN 49441 Plug
- 3x1,5mm<sup>2</sup> Cord
- CE, RoHS Certified

Shipping Information



| Product Code | U  | Description                                                                                                                                                    | Net Weight (kg) | Gross Weight (kg) | Packing Dimensions (wp x dp x hp) |
|--------------|----|----------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|-------------------|-----------------------------------|
| 09SB-F0AG-2  | 1U | 19", 1U, 9xDIN49440 Socket Schuko PDU, DIN 49441 plug, without fuse, aluminium profile housing, (250Vac, 4000 Watt, 3x1,5mm <sup>2</sup> x2,5m cord), CE, RoHs | 0,90            | 1,20              | 520 X 100 X 50                    |
| 06SB-F1AG-2  | 1U | 19", 1U, 6xDIN49440 Socket Schuko PDU, DIN 49441 plug, fused, aluminium profile housing, (250Vac, 4000 Watt, 1x16A, 3x1,5mm <sup>2</sup> x2,5m cord), CE, RoHs | 0,90            | 1,20              | 520 X 100 X 50                    |
| 09SB-F1AG-2  | 2U | 19", 2U, 9xDIN49440 Socket Schuko PDU, DIN 49441 plug, fused, aluminium profile housing, (250Vac, 4000 Watt, 1x16A, 3x1,5mm <sup>2</sup> x2,5m cord), CE, RoHs | 1,75            | 2,00              | 520 X 125 X 50                    |



|             |    |                                                                                                                                                     |      |      |                |
|-------------|----|-----------------------------------------------------------------------------------------------------------------------------------------------------|------|------|----------------|
| 9UK1-F0AG-1 | 1U | 19", 1U, 9xBS1363 Socket U.K type PDU, without fuse, DIN 49441 plug, aluminium profile housing, CE, RoHs (250Vac, 3x1,5mm <sup>2</sup> x2,5m cord), | 0,90 | 1,20 | 520 X 100 X 50 |
| 5UK1-F1AG-1 | 1U | 19", 1U, 5xBS1363 Socket U.K type PDU, fused, DIN 49441 plug, aluminium profile housing, CE, RoHs (250Vac, 1x16A, 3x1,5mm <sup>2</sup> x2,5m cord), | 0,90 | 1,20 | 520 X 100 X 50 |
| 9UK1-F1AG-1 | 2U | 19", 2U, 9xBS1363 Socket U.K type PDU, fused, DIN 49441 plug, aluminium profile housing, CE, RoHs (250Vac, 1x16A, 3x1,5mm <sup>2</sup> x2,5m cord), | 0,90 | 1,20 | 520 X 100 X 50 |



|              |    |                                                                                                                                                  |      |      |                |
|--------------|----|--------------------------------------------------------------------------------------------------------------------------------------------------|------|------|----------------|
| 12C13-F0AG-1 | 1U | 19", 1U, 12xIEC 320, C13 socket PDU, DIN 49441 plug, without fuse, aluminium profile housing, CE, RoHs (250Vac, 3x1,5mm <sup>2</sup> x2,5m cord) | 0,90 | 1,20 | 520 X 100 X 50 |
| 8C13-F1AG-1  | 1U | 19", 2U, 8xIEC 320, C13 socket PDU, DIN 49441 plug, fused, aluminium profile housing, CE, RoHs (250Vac, 3x1,5mm <sup>2</sup> x2,5m cord)         | 0,90 | 1,20 | 520 X 100 X 50 |

**GURKAN**  
**19"Accessories**



**Vertical Mounting  
Basic PDU**

- In Accordance with IEC, DIN, BS Standards
- Vertical Mounting
- 240Vac, Max.4000 Watt
- Fuse Protected
- DIN 49440 Socked, DIN 49441 Plug
- With Cable and Electric Plug (optional)
- 3x1,5mm<sup>2</sup> or 3x2,5mm<sup>2</sup> Cord (optional)
- CE, RoHS Certified



Shipping Information



| Product Code | Description                                                                                                             | Net Weight (kg) | Gross Weight (kg) | Packing Dimensions (wp x dp x hp) |
|--------------|-------------------------------------------------------------------------------------------------------------------------|-----------------|-------------------|-----------------------------------|
| 09SB-F1AG-D  | Vertical mounting, 9xDIN49440 Socket Schuko PDU, Input terminals, aluminium profile housing, (250Vac, 1x16A), CE, RoHs  | 1,50            | 1,90              | 1                                 |
| 12SB-F2AG-D  | Vertical mounting, 12xDIN49440 Socket Schuko PDU, Input terminals, aluminium profile housing, (250Vac, 2x16A), CE, RoHs | 2,00            | 2,50              | 1                                 |
| 18SB-F3AG-D  | Vertical mounting, 18xDIN49440 Socket Schuko PDU, Input terminals, aluminium profile housing, (400Vac, 3x16A), CE, RoHs | 3,00            | 3,50              | 1                                 |
| 24SB-F3AG-D  | Vertical mounting, 24xDIN49440 Socket Schuko PDU, Input terminals, aluminium profile housing, (400Vac, 3x20A), CE, RoHs | 4,00            | 4,75              | 1                                 |



**GURKAN**  
**19"Accessories**

**Grounding Cable Sets**




Shipping Information  Dimensions in mm

| Product Code | Description                                                                                             |  |  | Packing Dimensions<br>( wp x dp x hp ) |
|--------------|---------------------------------------------------------------------------------------------------------|--|--|----------------------------------------|
| GNDW-2504-1  | Grounding cable set for wall type cabinets (1x4,0mm² , 4 pcs.)                                          |  |  | 1                                      |
| GNDN-4005-1  | Grounding cable set for standing type network cabinets ( W600xD600 – W600xD800 )mm, (1x6,0mm² , 5 pcs.) |  |  | 1                                      |
| GNDN-6006-1  | Grounding cable set for standing type network cabinets (W780xD800 )mm, (1x6,0mm² , 6 pcs.)              |  |  | 1                                      |
| GND5-8007-1  | Grounding cable set for standing type server cabinets (W600/W780xD1000)mm (1x6,0mm², 7Ad. )             |  |  | 1                                      |
| GND8-8008-1  | Grounding cable set for standing type DCC-server cabinets (W600/W780xD1100)mm (1x6,0mm², 8Ad. )         |  |  | 1                                      |




|              |                                                                                                      |      |      |   |
|--------------|------------------------------------------------------------------------------------------------------|------|------|---|
| GND5-0312-45 | 19", grounding and equipotential bonding copper bus (In=max.10kA, 3x12mm Cu, L=450mm)                | 0,25 | 0,40 | 1 |
| GND5-0320-45 | 19", grounding and equipotential bonding copper bus (In=max.20kA, 3x20mm Cu, L=450mm)                | 0,45 | 0,70 | 1 |
| GND5-0320-10 | Vertical mounting, grounding and equipotential bonding copper bus (In=max.20kA, 3x20mm Cu, L=1000mm) | 1,65 | 2,00 | 1 |
| GND5-0320-15 | Vertical mounting, grounding and equipotential bonding copper bus (In=max.20kA, 3x20mm Cu, L=1500mm) | 1,95 | 2,50 | 1 |

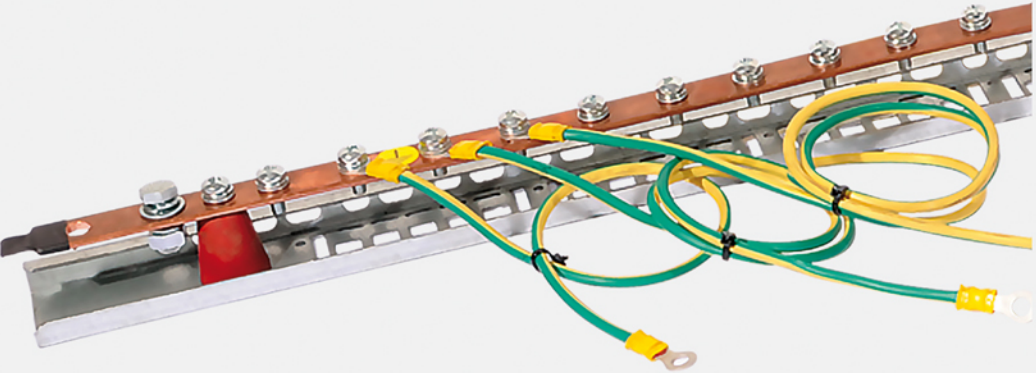

[cabinet@gurkan.com.tr](mailto:cabinet@gurkan.com.tr)

**GURKAN**  
**19"Accessories**

**19" Lightning Units**

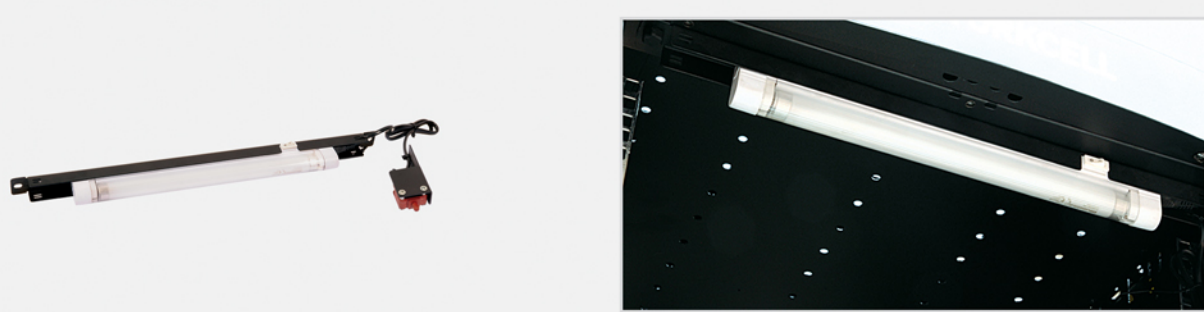

Shipping Information  Dimensions in mm

| Product Code | Description                                                                        | Net Weight<br>(kg) | Gross Weight<br>(kg) | Packing Dimensions<br>( wp x dp x hp ) |
|--------------|------------------------------------------------------------------------------------|--------------------|----------------------|----------------------------------------|
| LHT1-8W01-2  | 19", 1U On/Off switch controlled Lightning unit, BLACK-Ral9005-TX (250Vac, 8 Watt) | 0,35               | 0,50                 | 520 x 50 x 50                          |
| LHT1-8WSW-2  | 19", 1U Door switch controlled Lightning unit, BLACK-Ral9005-TX (250Vac, 8 Watt)   | 0,50               | 0,65                 | 520 x 100 x 50                         |



**19" Blank Panels**

Shipping Information  Dimensions in mm

| Product Code | U  | Description                          | Net Weight<br>(kg) | Gross Weight<br>(kg) | Packing Dimensions<br>( wp x dp x hp ) |
|--------------|----|--------------------------------------|--------------------|----------------------|----------------------------------------|
| BP1U-1PN2-1  | 1U | 1U, 19" Blank panel, GREY-Ral7035-TX | 0,30               | 0,40                 | 5                                      |
| BP2U-1PN2-1  | 2U | 2U, 19" Blank panel, GREY-Ral7035-TX | 0,50               | 0,65                 | 5                                      |
| BP3U-1PN2-1  | 3U | 3U, 19" Blank panel, GREY-Ral7035-TX | 0,71               | 0,95                 | 5                                      |

|             |    |                                       |      |      |   |
|-------------|----|---------------------------------------|------|------|---|
| BP1U-1PN2-2 | 1U | 1U, 19" Blank panel, BLACK-Ral9005-TX | 0,30 | 0,40 | 5 |
| BP2U-1PN2-2 | 2U | 2U, 19" Blank panel, BLACK-Ral9005-TX | 0,50 | 0,65 | 5 |
| BP3U-1PN2-2 | 3U | 3U, 19" Blank panel, BLACK-Ral9005-TX | 0,71 | 0,95 | 5 |
| BP4U-1PN2-2 | 4U | 4U, 19" Blank panel, BLACK-Ral9005-TX | 0,90 | 1,20 | 4 |
| BP6U-1PN2-2 | 6U | 6U, 19" Blank panel, BLACK-Ral9005-TX | 1,30 | 1,50 | 2 |

|             |    |                                             |      |      |   |
|-------------|----|---------------------------------------------|------|------|---|
| BP1U-1PH2-2 | 1U | 1U, 19" Panel, Perforated, BLACK-Ral9005-TX | 0,23 | 0,35 | 5 |
| BP2U-1PH2-2 | 2U | 2U, 19" Panel, Perforated, BLACK-Ral9005-TX | 0,34 | 0,45 | 5 |
| BP3U-1PH2-2 | 3U | 3U, 19" Panel, Perforated, BLACK-Ral9005-TX | 0,50 | 0,65 | 5 |

[cabinet@gurkan.com.tr](mailto:cabinet@gurkan.com.tr)




GURKAN  
19"Accessories



Metal Single Rings (1U, 2U )

| Shipping Information |  |
|----------------------|--|
| Dimensions in mm     |  |

| Product Code | U  | Description                                         | Net Weight (kg) | Gross Weight (kg) | Package Quantity (pcs) |
|--------------|----|-----------------------------------------------------|-----------------|-------------------|------------------------|
| KH1U-444M-2  | 1U | Metal single rings, 1U, (44x44)mm, BLACK-Ral9005-TX | 0,04            | 0,06              | 30                     |
| KH1U-448M-2  | 1U | Metal single rings, 1U, (44x88)mm, BLACK-Ral9005-TX | 0,06            | 0,08              | 30                     |
| KH2U-888M-2  | 2U | Metal single rings, 2U, (88x88)mm, BLACK-Ral9005-TX | 0,08            | 0,10              | 30                     |

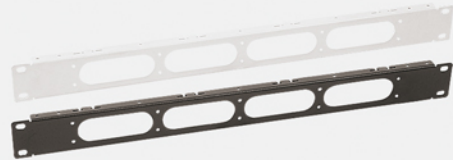

19" Cable Organizer Panels

| Shipping Information |  |
|----------------------|--|
| Dimensions in mm     |  |

| Product Code |    | Description                                                                  | Net Weight (kg) | Gross Weight (kg) | Package Quantity (pcs) |
|--------------|----|------------------------------------------------------------------------------|-----------------|-------------------|------------------------|
| KD1U-F0Y1-1  | 1U | 19", 1U Cable Organizer panel, brushless and without hook, GREY-Ral7035-TX   | 0,20            | 0,30              | 5                      |
| KD1U-F0Y1-2  | 1U | 19", 1U Cable Organizer panel, brushless and without hook, BLACK-Ral9005-TX  | 0,20            | 0,30              | 5                      |
| KD1U-F1Y1-1  | 1U | 19", 1U Cable Organizer panel, with brush and without hook, GREY-Ral7035-TX  | 0,20            | 0,40              | 5                      |
| KD1U-F1Y1-2  | 1U | 19", 1U Cable Organizer panel, with brush and without hook, BLACK-Ral9005-TX | 0,20            | 0,40              | 5                      |



|             |    |                                                                              |      |      |   |
|-------------|----|------------------------------------------------------------------------------|------|------|---|
| KD1U-F1E1-1 | 1U | 19", 1U Cable Organizer panel, with brush and without hook, GREY-Ral7035-TX  | 0,85 | 1,00 | 1 |
| KD1U-F1E1-1 | 1U | 19", 1U Cable Organizer panel (44x88), with brush and hook, GREY-Ral7035-TX  | 1,00 | 1,15 | 1 |
| KD1U-F1E1-2 | 1U | 19", 1U Cable Organizer panel (44x88), with brush and hook, BLACK-Ral9005-TX | 1,00 | 1,15 | 1 |

GURKAN  
19"Accessories



19" Cable Organizer Panels




| Shipping Information |  |
|----------------------|--|
| Dimensions in mm     |  |

| Product Code | U  | Description                                                             | Net Weight (kg) | Gross Weight (kg) | Package Quantity (pcs) |
|--------------|----|-------------------------------------------------------------------------|-----------------|-------------------|------------------------|
| KD1U-444M-1  | 1U | 19", 1U Cable Organizer panel, metal hooked (44x44)mm, GREY-Ral7035-TX  | 0,40            | 0,50              | 1                      |
| KD1U-444M-2  | 1U | 19", 1U Cable Organizer panel, metal hooked (44x44)mm, BLACK-Ral9005-TX | 0,40            | 0,50              | 1                      |
| KD1U-448M-1  | 1U | 19", 1U Cable Organizer panel, metal hooked (44x88)mm, GREY-Ral7035-TX  | 0,60            | 0,75              | 1                      |
| KD1U-448M-2  | 1U | 19", 1U Cable Organizer panel, metal hooked (44x88)mm, BLACK-Ral9005-TX | 0,60            | 0,75              | 1                      |



|             |    |                                                                         |      |      |   |
|-------------|----|-------------------------------------------------------------------------|------|------|---|
| KD2U-888M-1 | 2U | 19", 2U Cable Organizer panel, metal hooked (88x88)mm, GREY-Ral7035-TX  | 0,80 | 0,90 | 1 |
| KD2U-888M-2 | 2U | 19", 2U Cable Organizer panel, metal hooked (88x88)mm, BLACK-Ral9005-TX | 0,80 | 0,90 | 1 |

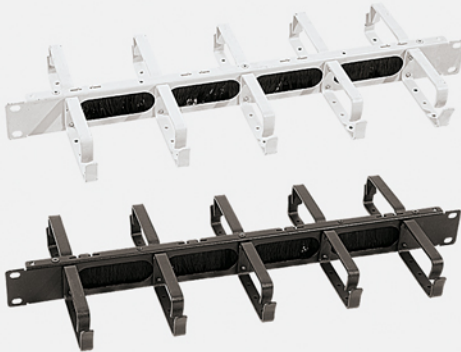

|             |    |                                                                                       |      |      |   |
|-------------|----|---------------------------------------------------------------------------------------|------|------|---|
| KD1U-F1D1-1 | 1U | 19", 1U Cable Organizer panel, double sided, metal hooked (44x88)mm, GREY-Ral7035-TX  | 0,90 | 1,00 | 1 |
| KD1U-F1D1-1 | 1U | 19", 1U Cable Organizer panel, double sided, metal hooked (44x88)mm, BLACK-Ral9005-TX | 0,90 | 1,00 | 1 |




**GURKAN**  
**19"Accessories**

**19" Cable Organizer Panels**



Shipping Information  Dimensions in mm

| Product Code | U  | Description                                                           | Net Weight (kg) | Gross Weight (kg) | Package Quantity (pcs) |
|--------------|----|-----------------------------------------------------------------------|-----------------|-------------------|------------------------|
| KC1U-444M-2  | 1U | 19", 1U Cable Organizer panel, with cover (44x44)mm, BLACK-Ral9005-TX | 0,60            | 0,75              | 1                      |
| KC1U-448M-2  | 1U | 19", 1U Cable Organizer panel, with cover (44x88)mm, BLACK-Ral9005-TX | 0,71            | 0,80              | 1                      |
| KC1U-888M-2  | 1U | 19", 1U Cable Organizer panel, with cover (88x88)mm, BLACK-Ral9005-TX | 1,00            | 1,20              | 1                      |

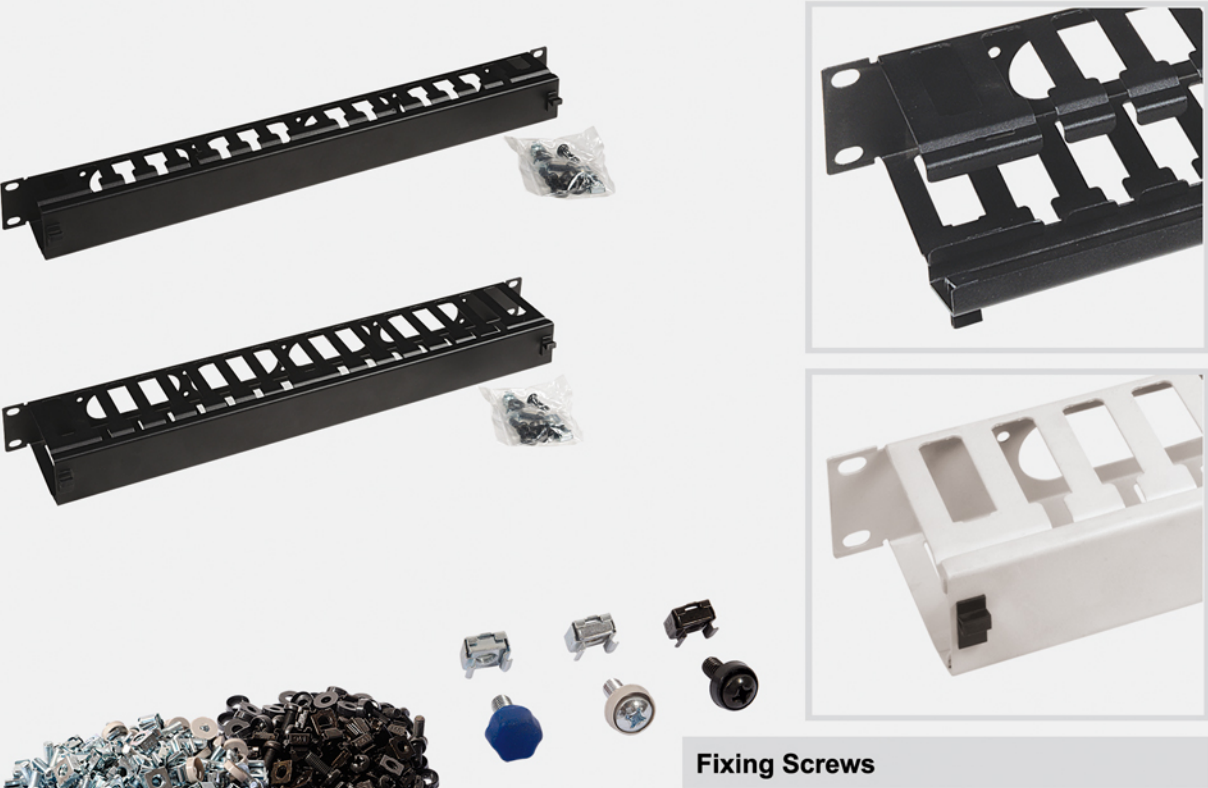

**Fixing Screws**


Shipping Information  Dimensions in mm

| Product Code | Description                          | Package Quantity (pcs) |
|--------------|--------------------------------------|------------------------|
| C04T-6151-S  | M6 cage nut and screw sets (4 pcs.)  | 1                      |
| C20T-6151-S  | M6 cage nut and screw sets (20 pcs.) | 1                      |
| C50T-6151-S  | M6 cage nut and screw sets (50 pcs.) | 1                      |

[cabinet@gurkan.com.tr](mailto:cabinet@gurkan.com.tr)

**GURKAN**  
**19"Accessories**

**Vertical Cable Management, (Front Vertical Mounting for W780 Cabinets with Cover Type)**

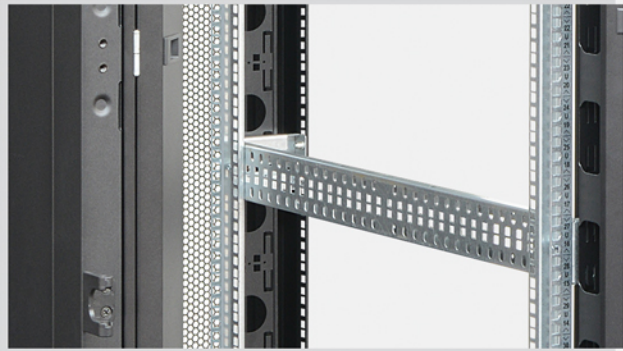

Shipping Information  Dimensions in mm


| Product Code | Description                                                                                                     | Net Weight (kg) | Gross Weight (kg) | Packing Dimensions ( Wp x Dp x Hp ) |
|--------------|-----------------------------------------------------------------------------------------------------------------|-----------------|-------------------|-------------------------------------|
| KKD1-32U1-2  | 32U Vertical cable management ( right/left set ) (for W=780mm Cabinets, front and rear-mounted BLACK-Ral9005-TX | 9,00            | 11,00             | 200 x 120 x 1500                    |
| KKD1-36U1-2  | 36U Vertical cable management ( right/left set ) (for W=780mm Cabinets, front and rear-mounted BLACK-Ral9005-TX | 10,50           | 12,00             | 200 x 120 x 1700                    |
| KKD1-42U1-2  | 42U Vertical cable management ( right/left set ) (for W=780mm Cabinets, front and rear-mounted BLACK-Ral9005-TX | 12,00           | 13,00             | 200 x 120 x 1900                    |
| KKD1-44U1-2  | 44U Vertical cable management( right/left set ) (for W=780mm Cabinets, front and rear-mounted BLACK-Ral9005-TX  | 12,50           | 13,50             | 200 x 120 x 2000                    |
| KKD1-47U1-2  | 47U Vertical cable management( right/left set ) (for W=780mm Cabinets, front and rear-mounted BLACK-Ral9005-TX  | 15,00           | 17,00             | 200 x 120 x 2150                    |



[cabinet@gurkan.com.tr](mailto:cabinet@gurkan.com.tr)



**GURKAN**  
**19"Accessories**

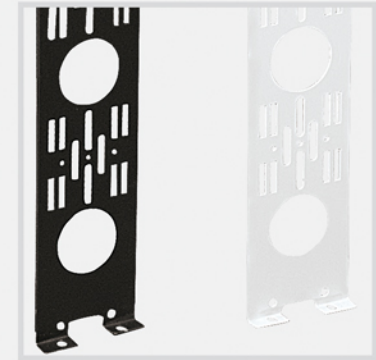

Vertical Cable Tray, (Side Vertical Mounting  
for W780xD800 cabinets)

Shipping Information   
Dimensions in mm

| Product Code | Description                                                                                                           | Net Weight<br>(kg) | Gross Weight<br>(kg) | Packing Dimensions<br>( Wp x Dp x Hp ) |
|--------------|-----------------------------------------------------------------------------------------------------------------------|--------------------|----------------------|----------------------------------------|
| KKY1-32U1-2  | 32U, w_ 300mm Side vertical mount cable tray,<br>( for W780mmxD=800mm cabinets, right/left set ),<br>Black-Ral9005-TX | 10,00              | 12,00                | 200 x 90 x 1500                        |
| KKY1-36U1-2  | 36U, w_ 300mm Side vertical mount cable tray,<br>( for W780mmxD=800mm cabinets, right/left set ),<br>Black-Ral9005-TX | 12,00              | 14,00                | 200 x 90 x 1700                        |
| KKY1-42U1-2  | 42U, w_ 300mm Side vertical mount cable tray,<br>( for W780mmxD=800mm cabinets, right/left set ),<br>Black-Ral9005-TX | 13,30              | 15,50                | 200 x 90 x 1900                        |
| KKY1-44U1-2  | 44U, w_ 300mm Side vertical mount cable tray,<br>( for W780mmxD=800mm cabinets, right/left set ),<br>Black-Ral9005-TX | 14,00              | 16,50                | 200 x 90 x 2000                        |
| KKY1-47U1-2  | 47U, w_ 300mm Side vertical mount cable tray,<br>( for W780mmxD=800mm cabinets, right/left set ),<br>Black-Ral9005-TX | 15,00              | 17,50                | 200 x 90 x 2150                        |




[cabinet@gurkan.com.tr](mailto:cabinet@gurkan.com.tr)

**GURKAN**  
**19"Accessories**



Shipping Information   
Dimensions in mm

| Product Code | Description                                                                                                         | Net Weight<br>(kg) | Gross Weight<br>(kg) | Packing Dimensions<br>( Wp x Dp x Hp ) |
|--------------|---------------------------------------------------------------------------------------------------------------------|--------------------|----------------------|----------------------------------------|
| KKD1-32U1-2  | 32U, w=90mm Rear vertical mount cable tray,<br>( for W780mmxD=800mm cabinets, right/left set ),<br>Black-Ral9005-TX | 8,50               | 10,00                | 100 x 40 x 1500                        |
| KKD1-36U1-2  | 36U, w=90mm Rear vertical mount cable tray,<br>( for W780mmxD=800mm cabinets, right/left set ),<br>Black-Ral9005-TX | 10,20              | 11,50                | 100 x 40 x 1700                        |
| KKD1-42U1-2  | 42U, w=90mm Rear vertical mount cable tray,<br>( for W780mmxD=800mm cabinets, right/left set ),<br>Black-Ral9005-TX | 12,00              | 13,50                | 100 x 40 x 1900                        |
| KKD1-44U1-2  | 44U, w=90mm Rear vertical mount cable tray,<br>( for W780mmxD=800mm cabinets, right/left set ),<br>Black-Ral9005-TX | 13,00              | 15,50                | 100 x 40 x 2000                        |
| KKD1-47U1-2  | 47U, w=90mm Rear vertical mount cable tray,<br>( for W780mmxD=800mm cabinets, right/left set ),<br>Black-Ral9005-TX | 14,00              | 16,00                | 100 x 40 x 2150                        |

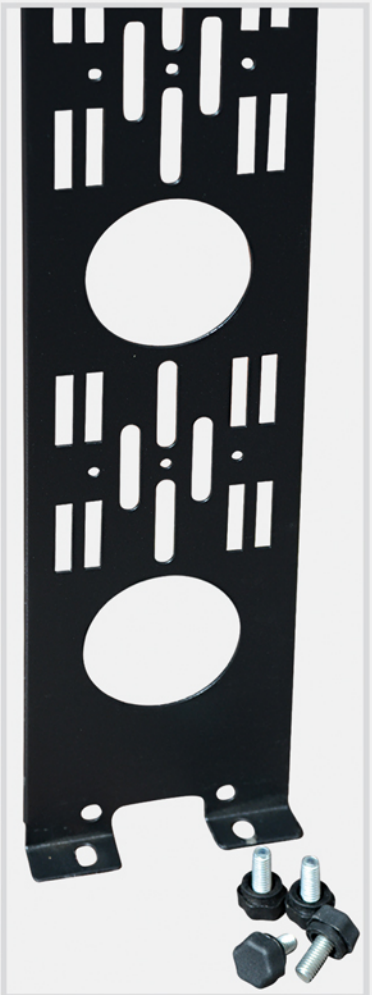

[cabinet@gurkan.com.tr](mailto:cabinet@gurkan.com.tr)







**GURKAN**  
**19" Accessories**

**Plinths**

| Shipping Information |                                                                                   | Dimensions in mm |                   |                                     |
|----------------------|-----------------------------------------------------------------------------------|------------------|-------------------|-------------------------------------|
| Product Code         | Description                                                                       | Net Weight (kg)  | Gross Weight (kg) | Packing Dimensions ( Wp x Dp x Hp ) |
| BZY1-66H1-2          | (w=600mm x d=600mm) h=110mm Plinth, ( with cable entry cover ), BLACK-Ral9005-TX  | 6,20             | 7,50              | 620 x 620 x 140                     |
| BZY1-68H1-2          | (w=600mm x d=800mm) h=110mm Plinth, ( with cable entry cover ), BLACK-Ral9005-TX  | 6,70             | 8,00              | 620 x 820 x 140                     |
| BZY1-86H1-2          | (w=780mm x d=600mm) h=110mm Plinth, ( with cable entry cover ), BLACK-Ral9005-TX  | 7,00             | 8,50              | 820 x 620 x 140                     |
| BZY1-88H1-2          | (w=780mm x d=800mm) h=110mm Plinth, ( with cable entry cover ), BLACK-Ral9005-TX  | 8,00             | 9,50              | 820 x 820 x 140                     |
| BZY1-61H1-2          | (w=600mm x d=1000mm) h=110mm Plinth, ( with cable entry cover ), BLACK-Ral9005-TX | 8,00             | 9,50              | 620 x 1020 x 140                    |
| BZY1-81H1-2          | (w=780mm x d=1000mm) h=110mm Plinth, ( with cable entry cover ), BLACK-Ral9005-TX | 8,50             | 10,00             | 820 x 1020 x 140                    |
| BZY1-82H1-2          | (w=780mm x d=1200mm) h=110mm Plinth, ( with cable entry cover ), BLACK-Ral9005-TX | 9,50             | 11,50             | 820 x 1250 x 140                    |

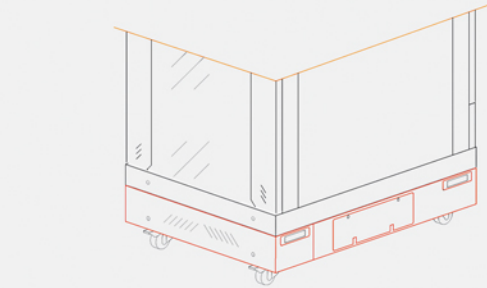

**Brush Strips (for Cable Access Holes )**

| Shipping Information |                                                                     | Dimensions in mm |  |                        |
|----------------------|---------------------------------------------------------------------|------------------|--|------------------------|
| Product Code         | Description                                                         | Brush Width (mm) |  | Package Quantity (pcs) |
| KGFW-0150-1          | L=150mm Brush Strip (for wall type cabinets ), GREY-Ral7035-TX      | 80               |  | 2                      |
| KGFS-0300-2          | L=300mm Brush Strip (for standing type cabinets ), BLACK-Ral9005-TX | 80               |  | 2                      |

cabinet@gurkan.com.tr

Brush Weight (mm)

**Castors and Leveling Feet**

**GURKAN**  
**19" Accessories**



| Shipping Information |                                                                                      | Dimensions in mm |                   |                        |
|----------------------|--------------------------------------------------------------------------------------|------------------|-------------------|------------------------|
| Product Code         | Description                                                                          | Net Weight (kg)  | Gross Weight (kg) | Package Quantity (pcs) |
| TKW1-0050-1          | Polyamide Castor set for wall type cabinets ( 4 pcs, max.100kg/set), GREY-Ral7035-TX | 0,50             | 0,75              | 1                      |



|             |                                                                                                                     |      |      |                 |
|-------------|---------------------------------------------------------------------------------------------------------------------|------|------|-----------------|
| TBS1-2050-2 | Heavy-Duty Castor set for network type cabinets, single point M10 screwed, ( 4pcs, max.750kg/set), BLACK-Ral9005-TX | 2,00 | 2,50 | 200 x 200 x 300 |
|-------------|---------------------------------------------------------------------------------------------------------------------|------|------|-----------------|



|             |                                                                                                                  |      |      |                 |
|-------------|------------------------------------------------------------------------------------------------------------------|------|------|-----------------|
| TBS2-2050-2 | Heavy-Duty Castor set for server type cabinets, four point M8 screwed, ( 4pcs, max.1200kg/set), BLACK-Ral9005-TX | 2,25 | 2,75 | 200 x 200 x 300 |
|-------------|------------------------------------------------------------------------------------------------------------------|------|------|-----------------|



|             |                                                                                    |      |      |                 |
|-------------|------------------------------------------------------------------------------------|------|------|-----------------|
| PAYS-M08P-2 | (M8x40) Adjustable leveling feet for wall type cabinets (4 pcs.) BLACK-Ral9005-TX  | 0,25 | 0,30 | 100 x 100 x 100 |
| PAYS-M08P-2 |                                                                                    | 0,35 | 0,40 | 100 x 100 x 100 |
| PAYS-M10P-2 | (M10x70) Adjustable leveling feet for wall type cabinets (4 pcs.) BLACK-Ral9005-TX | 0,45 | 0,50 | 100 x 100 x 100 |

cabinet@gurkan.com.tr



**GURKAN**  
**19" Accessories**



**Floor Mounting Sets**

Shipping Information   
Dimensions in mm

| Product Code | Description                                                             | Net Weight (kg) | Gross Weight (kg) | Packing Dimensions ( Wp x Dp x Hp ) |
|--------------|-------------------------------------------------------------------------|-----------------|-------------------|-------------------------------------|
| ASB1-W601-1  | W=600mm Floor mount set, GREY-Ral7035-TX, (M8 screwed, L-FORM, 2 pcs.)  | 0,90            | 1,25              | 650 x 100 x 50                      |
| ASB1-W801-1  | W=780mm Floor mount set, GREY-Ral7035-TX, (M8 screwed, L-FORM, 2 pcs.)  | 1,20            | 1,55              | 850 x 100 x 50                      |
| ASB1-W601-2  | W=600mm Floor mount set, BLACK-Ral9005-TX, (M8 screwed, L-FORM, 2 pcs.) | 0,90            | 1,25              | 650 x 100 x 50                      |
| ASB1-W801-2  | W=780mm Floor mount set, BLACK-Ral9005-TX, (M8 screwed, L-FORM, 2 pcs.) | 1,20            | 1,55              | 850 x 100 x 50                      |



**Side by Side Mounting Set**

Shipping Information   
Dimensions in mm

| Product Code | Description                                                             | Net Weight (kg) | Gross Weight (kg) | Packing Dimensions ( Wp x Dp x Hp ) |
|--------------|-------------------------------------------------------------------------|-----------------|-------------------|-------------------------------------|
| KBK1-1M61-G  | Side by Side Mount Set, (U-FORM, 4xM8x15 screwed, GALVANIZED, ( 6pcs.)) | 0,24            | 0,35              | 200 x 200 x 300                     |







**GÜRKAN**  
**NETWORK CABINETS**

*Gürkan Ofis Mobilyaları San. Tic. Ltd.Şti.*  
*Kayseri Serbest Bölgesi / Kayseri Tel : (352) 311 53 80 pbx Fax : (352) 311 53 90-91 [www.gurkan.com.tr](http://www.gurkan.com.tr)*

